







PORCELAIN TILES 600X600 mm

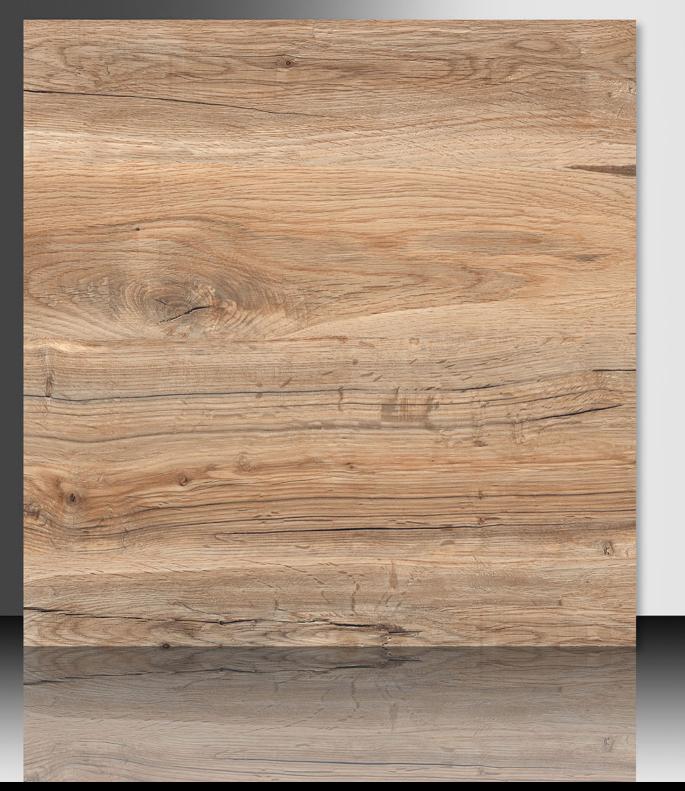

7006 WOODEN SERIES



PORCELAIN TILES 600X600 mm

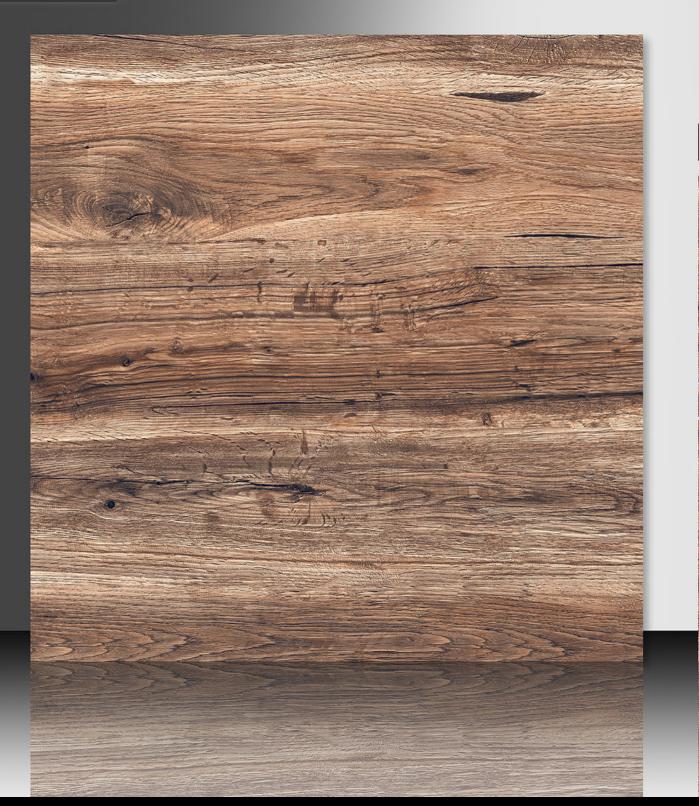


7007

WOODEN SERIES






PORCELAIN TILES 600X600 mm

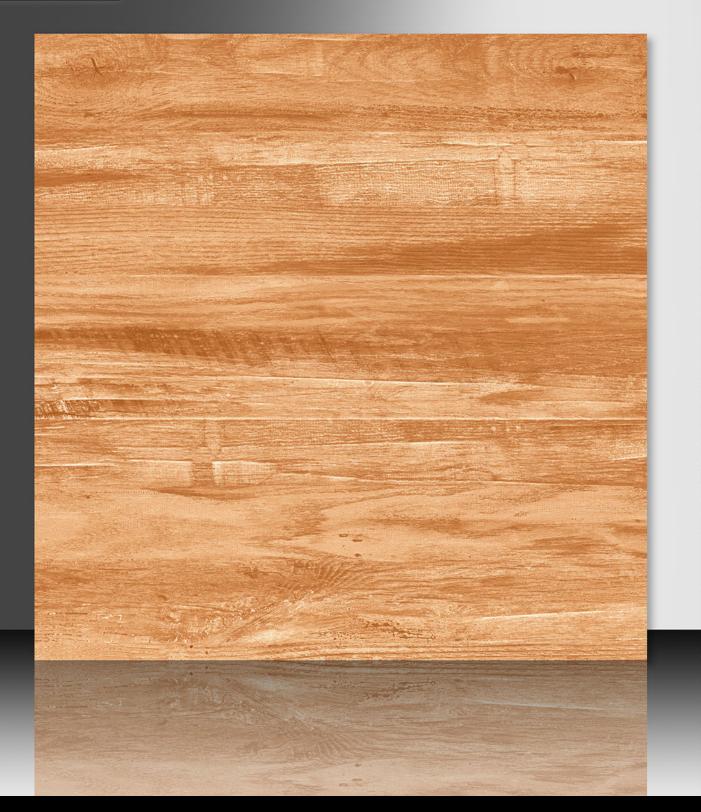

WOODEN SERIES 7009



PORCELAIN TILES 600X600 mm

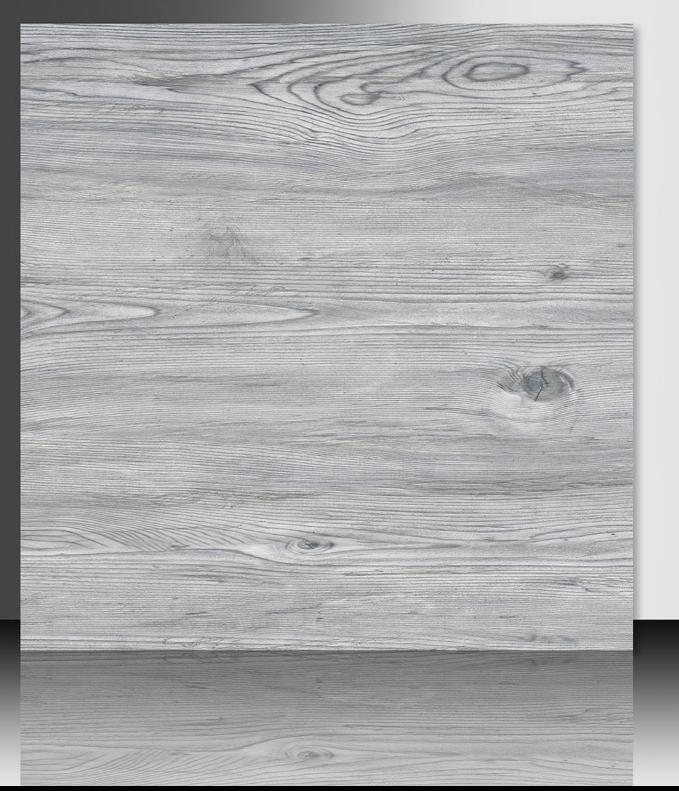

WOODEN SERIES 7011 S STEER COMPTICE


PORCELAIN TILES 600X600 mm



WOODEN SERIES 7012

WHITE BODY
PORCELAIN TILES
600X600 mm



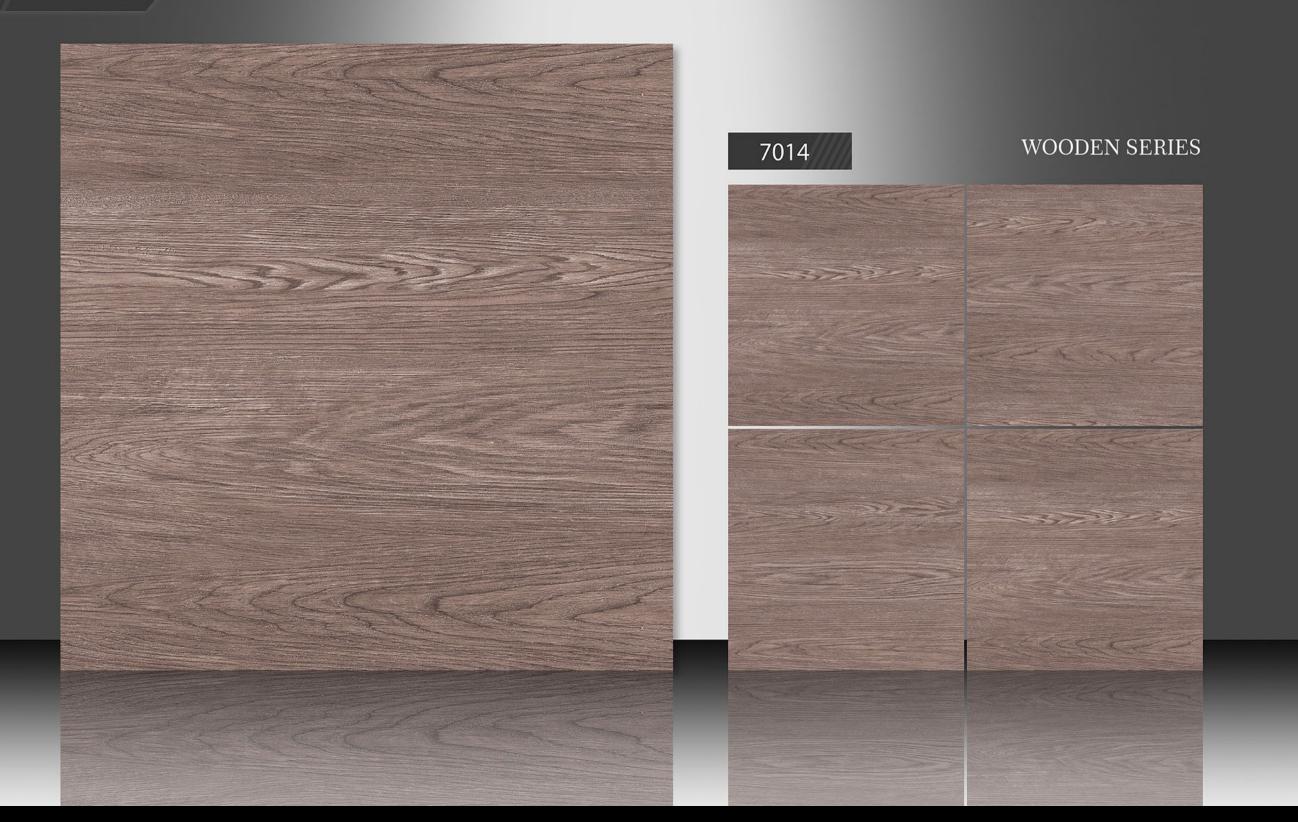

WHITE BODY PORCELAIN TILES 600X600 mm WOODEN SERIES 7015

WHITE BODY PORCELAIN TILES 600X600 mm WOODEN SERIES 7016
















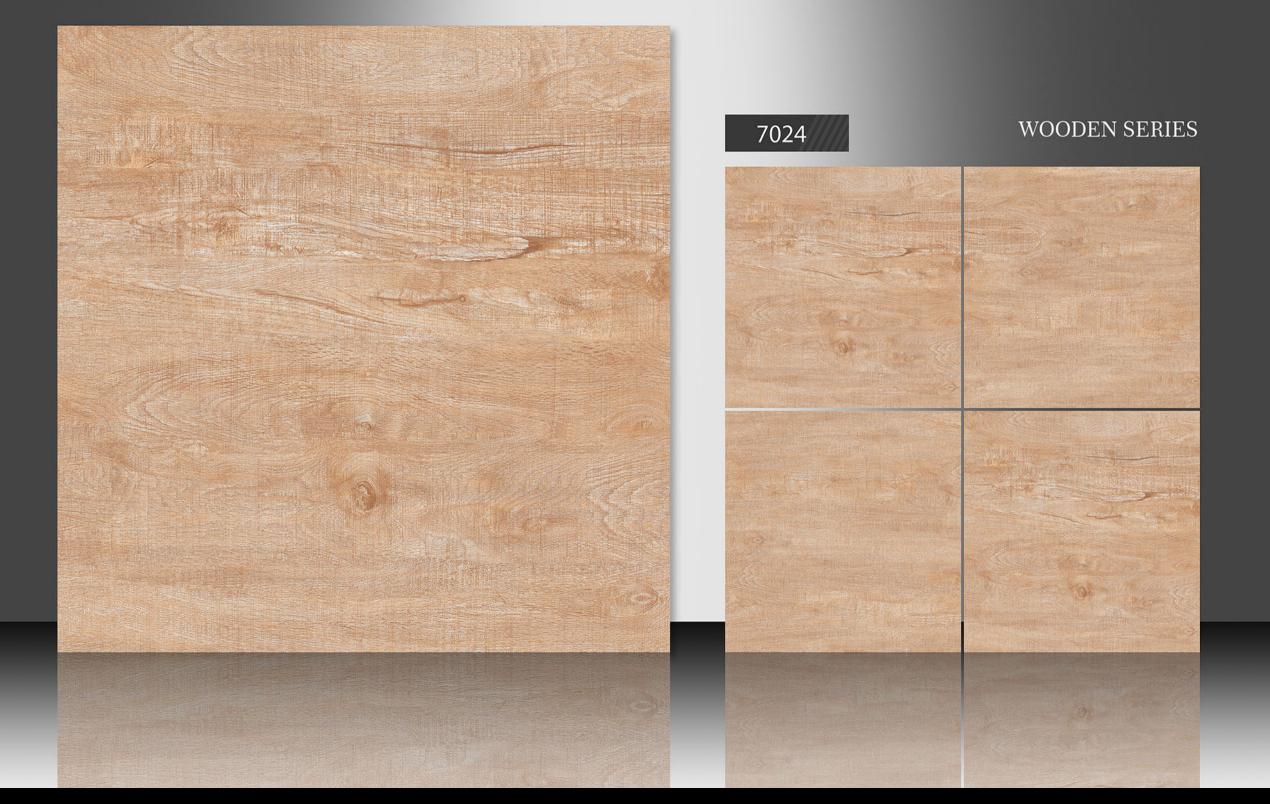

PORCELAIN TILES 600X600 mm




7025 WOODEN SERIES








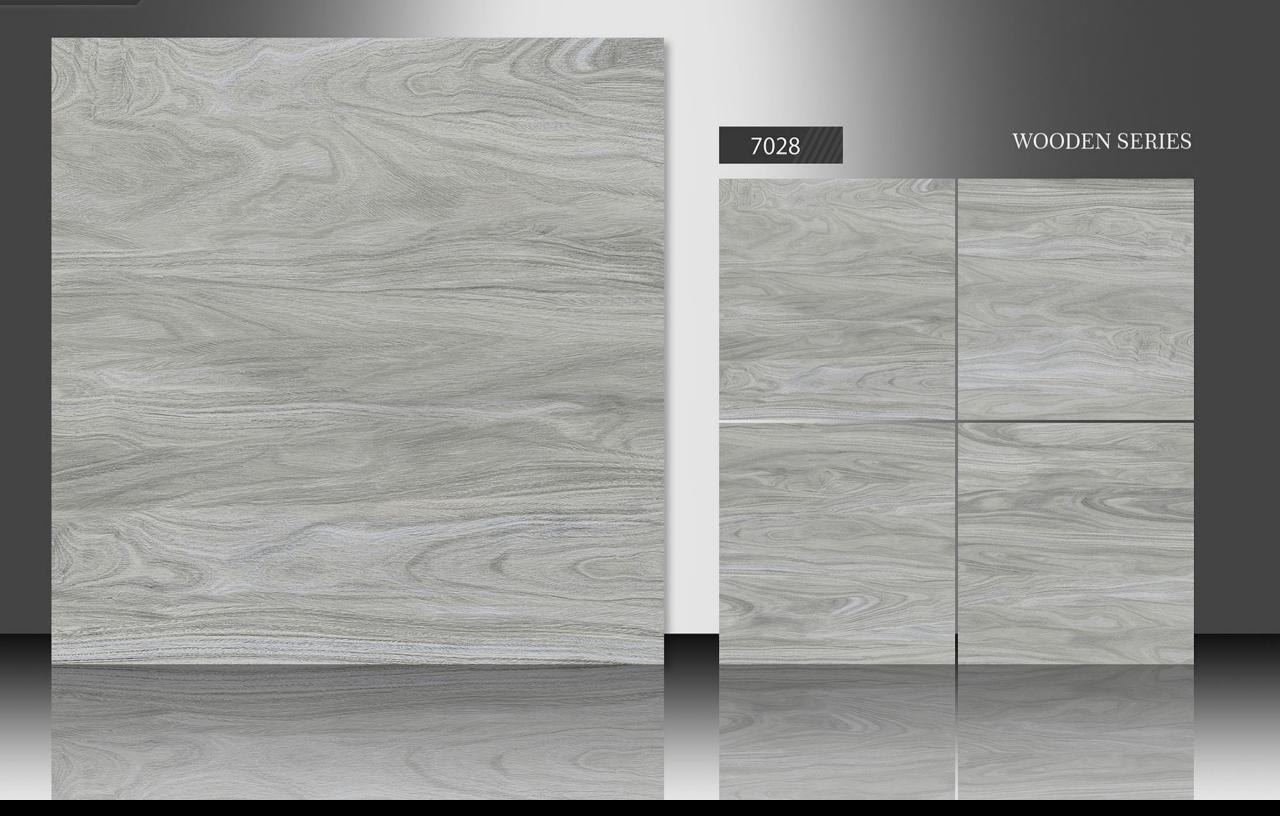

PORCELAIN TILES 600X600 mm

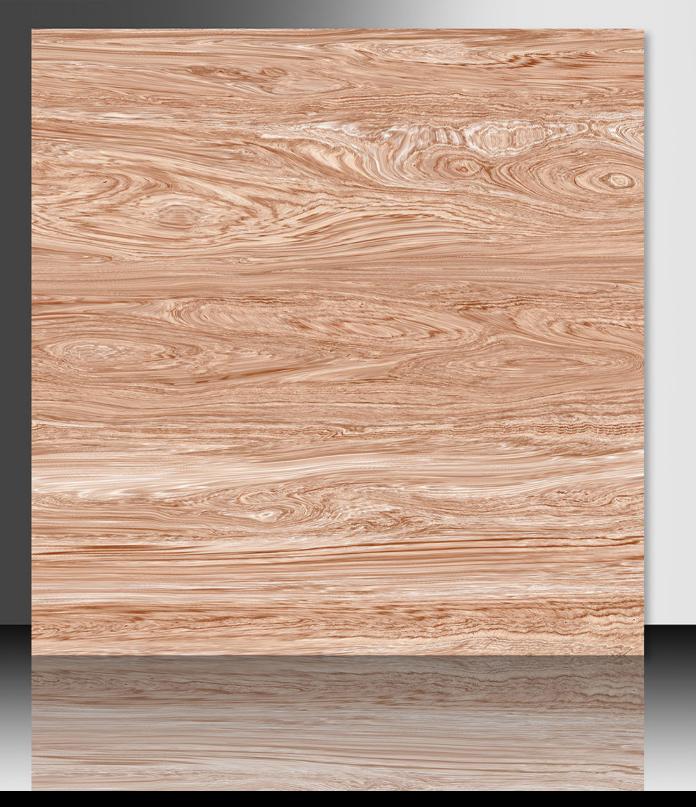

7029 WOODEN SERIES






















PORCELAIN TILES 600X600 mm

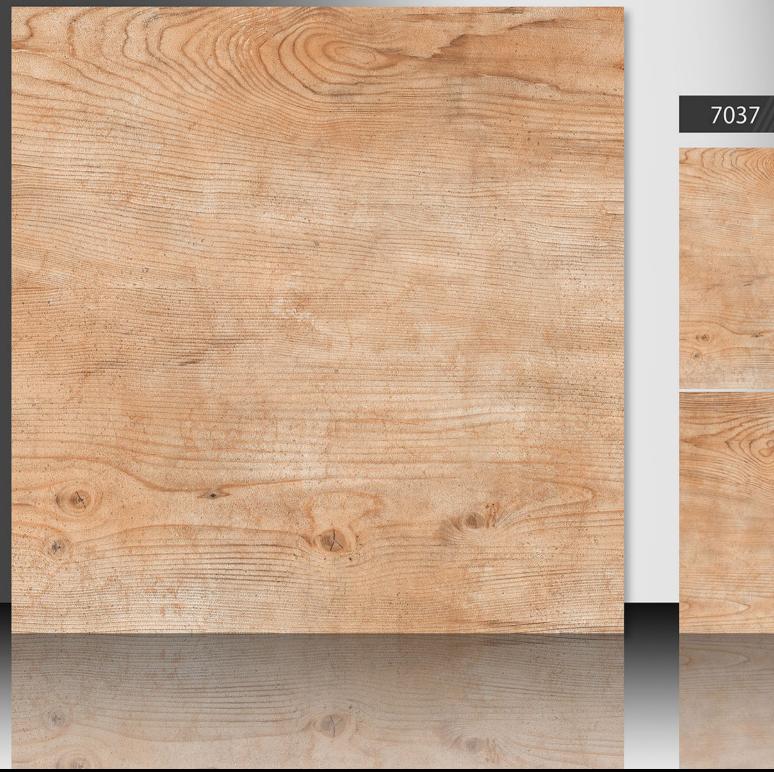

PORCELAIN TILES 600X600 mm

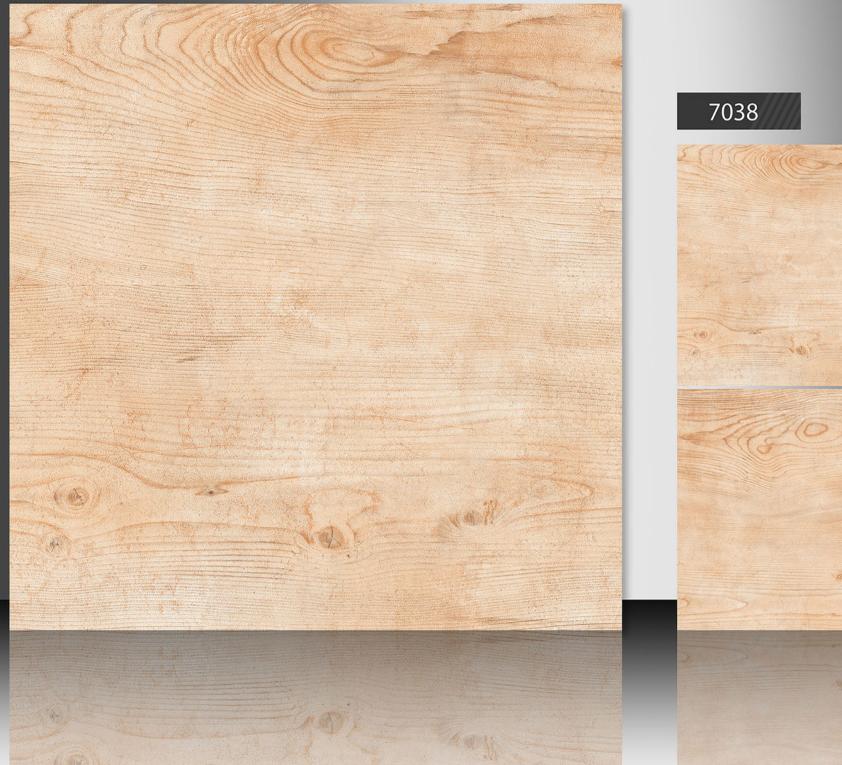

PORCELAIN TILES 600X600 mm

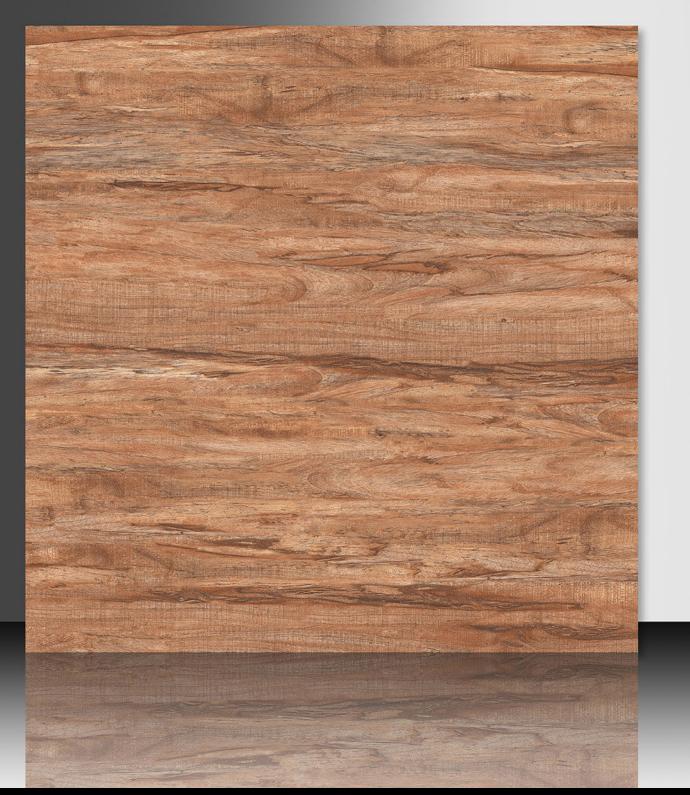




PORCELAIN TILES 600X600 mm





PORCELAIN TILES 600X600 mm

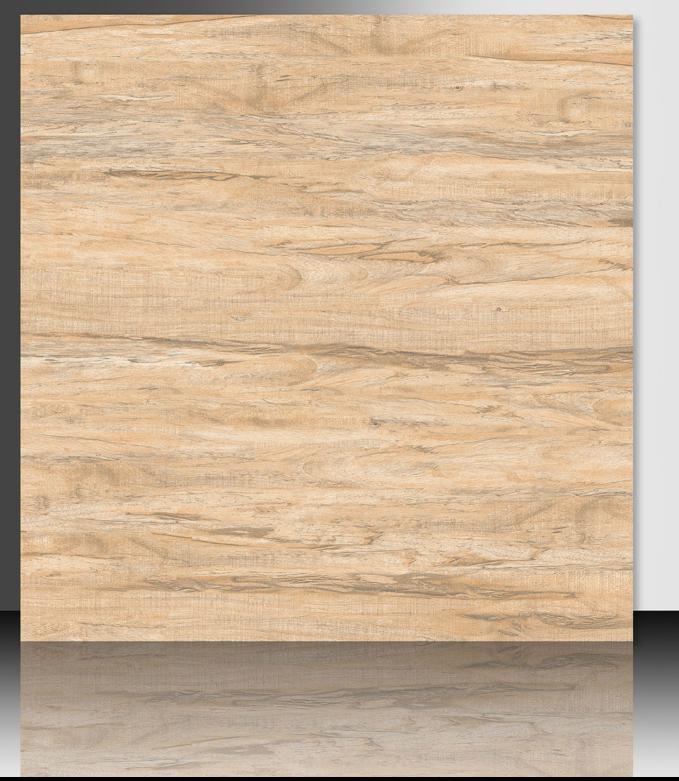








WHITE BODY
PORCELAIN TILES

600X600 mm

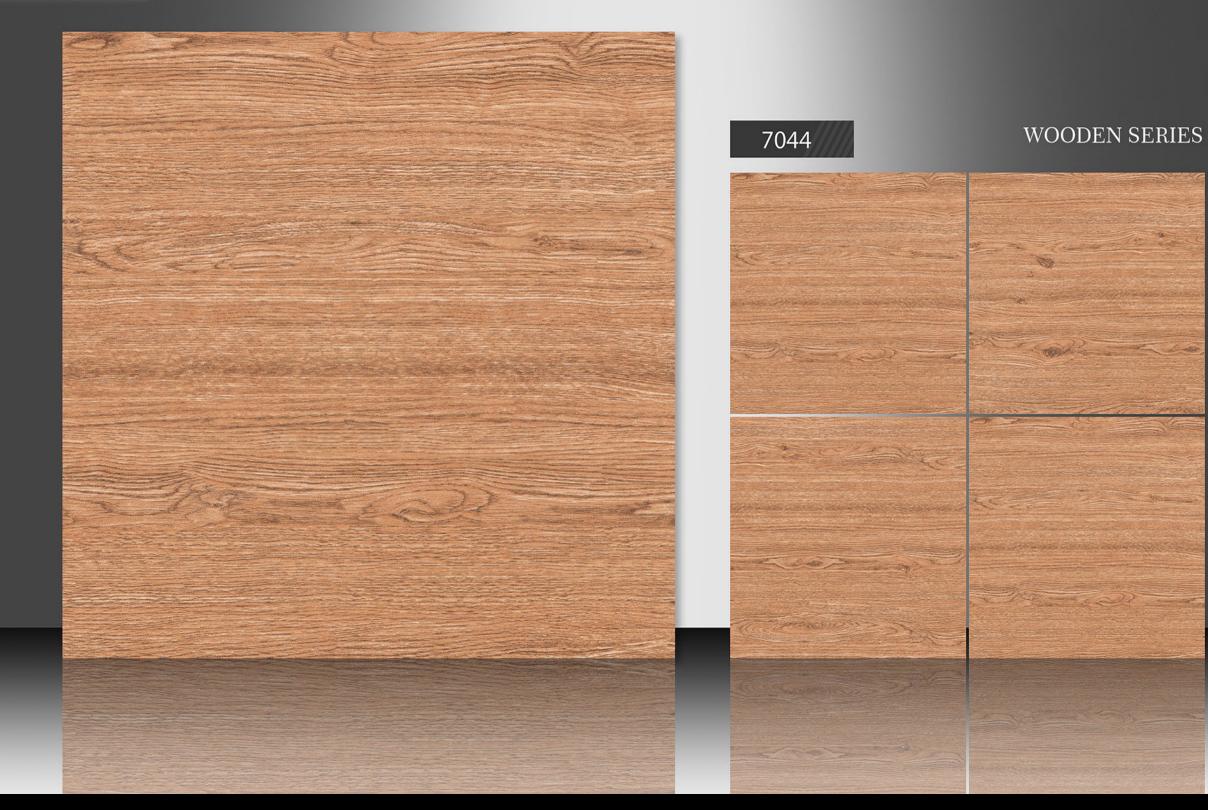


WHITE BODY PORCELAIN TILES 600X600 mm WOODEN SERIES 7045

WHITE BODY **PORCELAIN TILES** 600X600 mm WOODEN SERIES 7046

WHITE BODY
PORCELAIN TILES




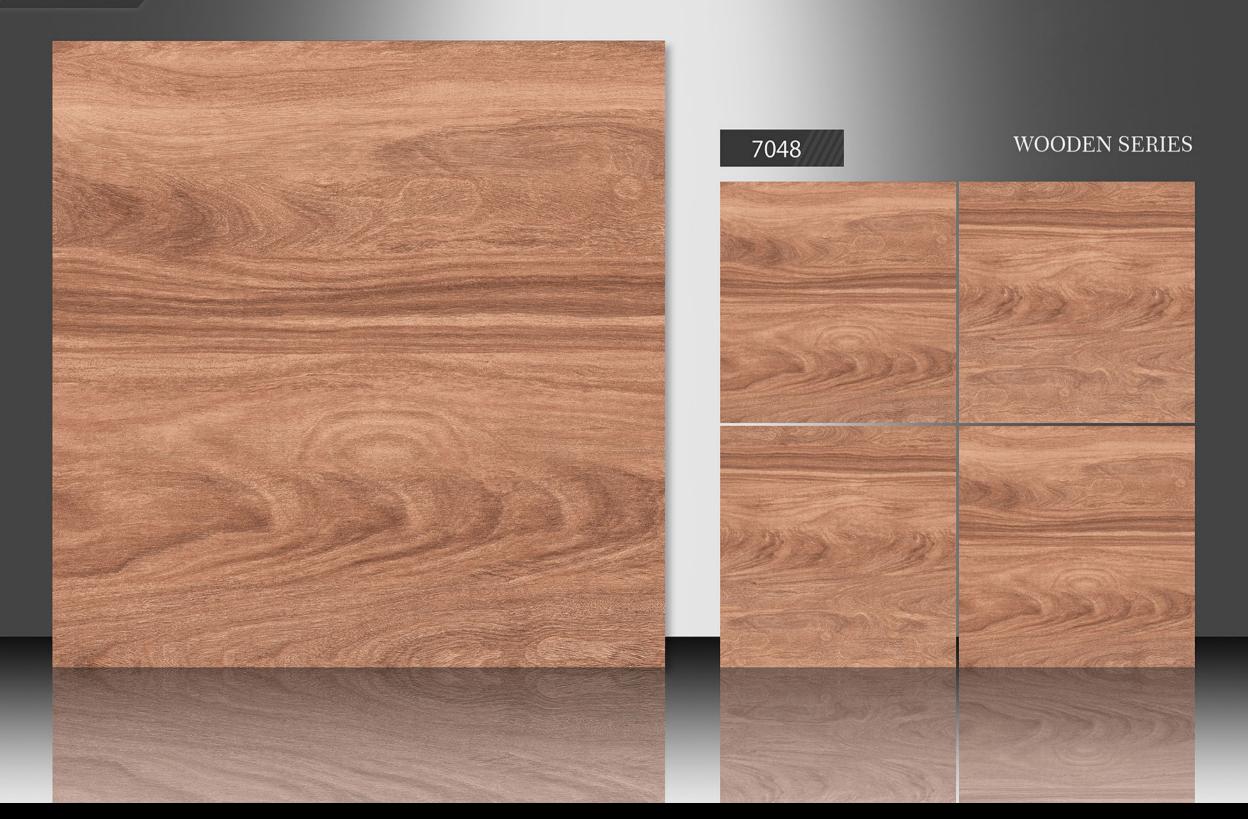



WHITE BODY
PORCELAIN TILES

600X600 mm

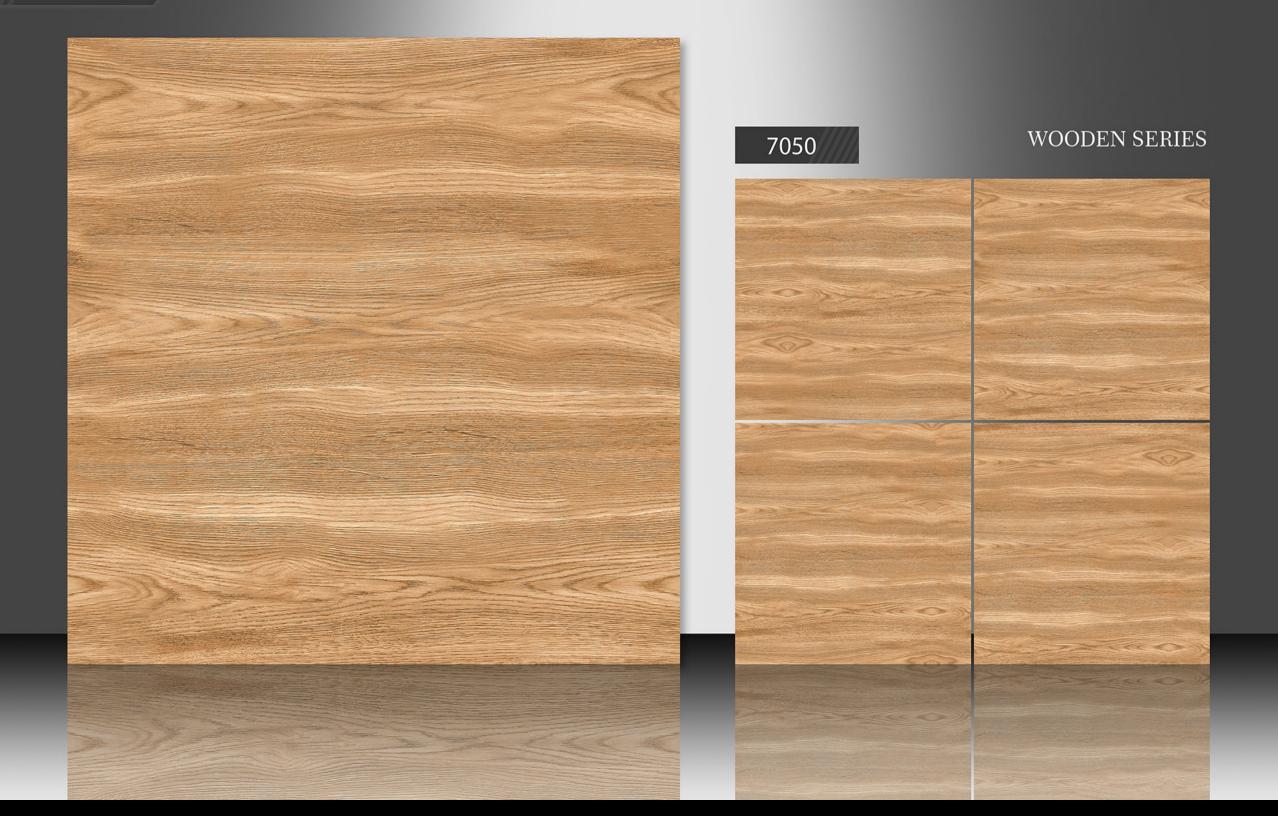

TECHNICAL SPECIFICATION

Particulars	Standard as per ISO 13006/EN 176 OUR VALUE		METHOD OF TESTING
Deviation in length	± 0.50%	± 0.3%	EN 98
Deviation in Thickness	± 5%	± 3%	EN 98
Straightness Of Sides	± 0.5%	± 0.3%	EN 98
Rectangularity	± 0.6%	± 0.3%	EN 98
Surface Flatness	± 0.5%	± 0.3%	EN 98
Water Absorption	< 3	3 < 4	ISO 10945.3 EN 98
Mohs Hardness	> 5	> 5	EN 101
Flexural Strength	> 35 N/Sq.mm	> 39 N/Sq.mm	_
Abrasion Resistance	As specified by Manufacturer	PE 3	ISO 10545.6 EN 102
Frost Resistance	Frost Proof	Frost Proof	ISO 10534 - 11
Chemical Resistance	No Damage	No Damage	ISO 10534 - 18
Thermal Shock Resistance	No Damage	No Damage	ISO 10545 - 9
Colour Resistance	No Damage	No Damage	_
Stain Resistance	Resistance	Stain Proof	ISO 10545 - 14
Moisture Expansion	NIII	NIII	ISO 10545 - 10
Crazing Resistance	Min 2 Cycle	Min 4 Cycle	

Note: Colour Shown are as accurate as the limitations of the printing process will allow. Prospective Customer Are advised to inspect a sample of the tiles before ordering every effort has been made to ensure the Accuracy of the information given. However, the Company reserves the right to change the specifications without prior notice. Sometimes variations in shade or size being inherent to ceramic industry may occur.

PACKING DETAIL

Size	Thickness	No. of Tiles	Area Approx.	Weight Approx.
600 X 600 MM	9 MM	4 Pcs.	1.44 Sq. Mtr.	28 Kg.

UTILITY OF FLOOR TILES



























