




LEADSUN




600 X 600 MM

PORCELAIN TILES

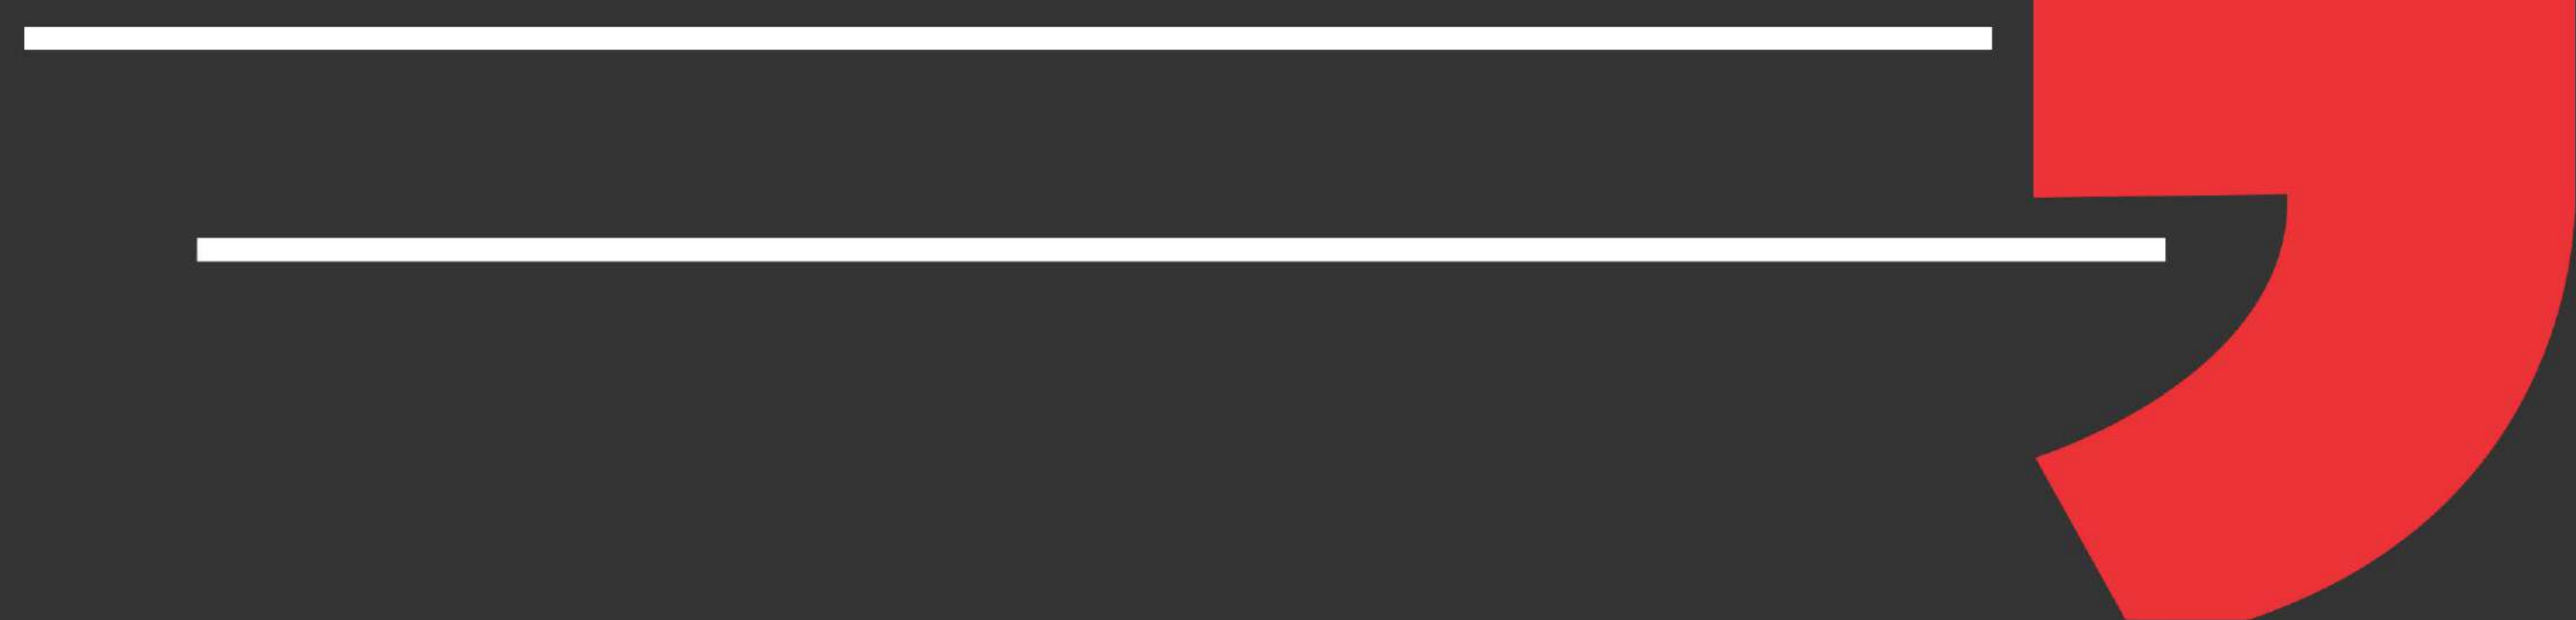

GLOSSY COLLECATION

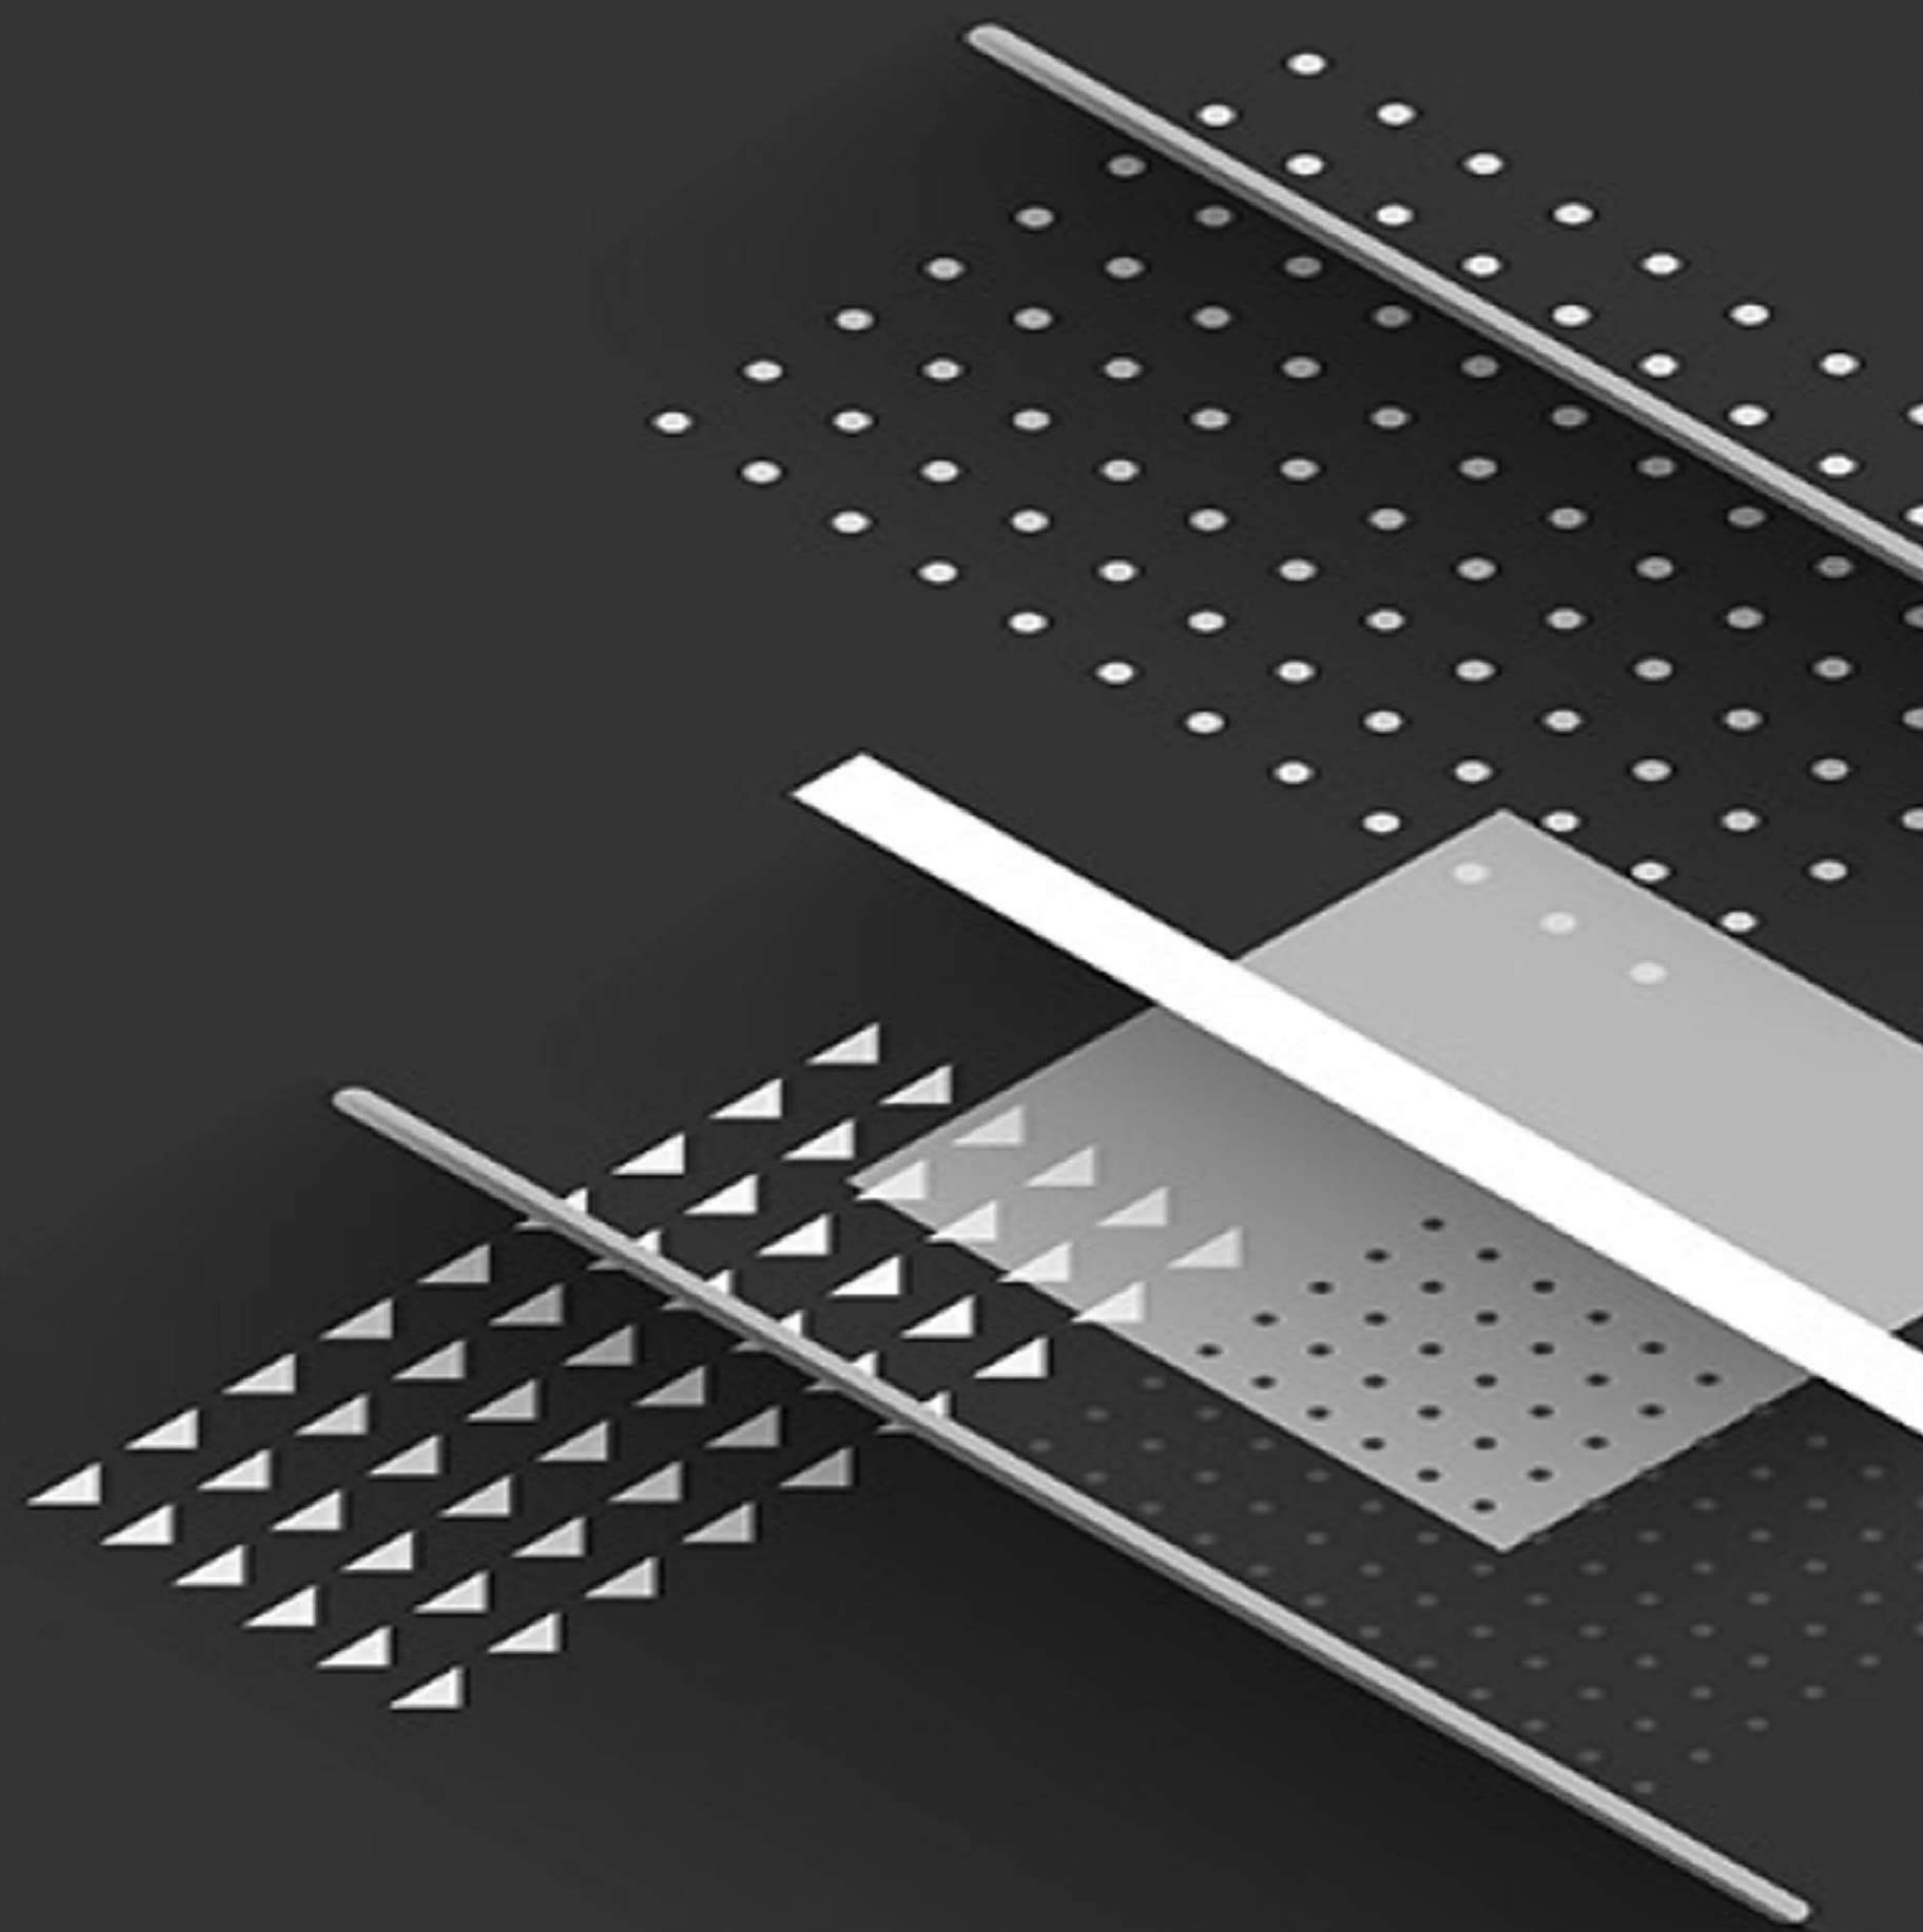



LEADSUN


**MATT
SERIES**

APPLICATIONS



WHITE BODY


**600MMx600MM
PORCELAIN TILES**

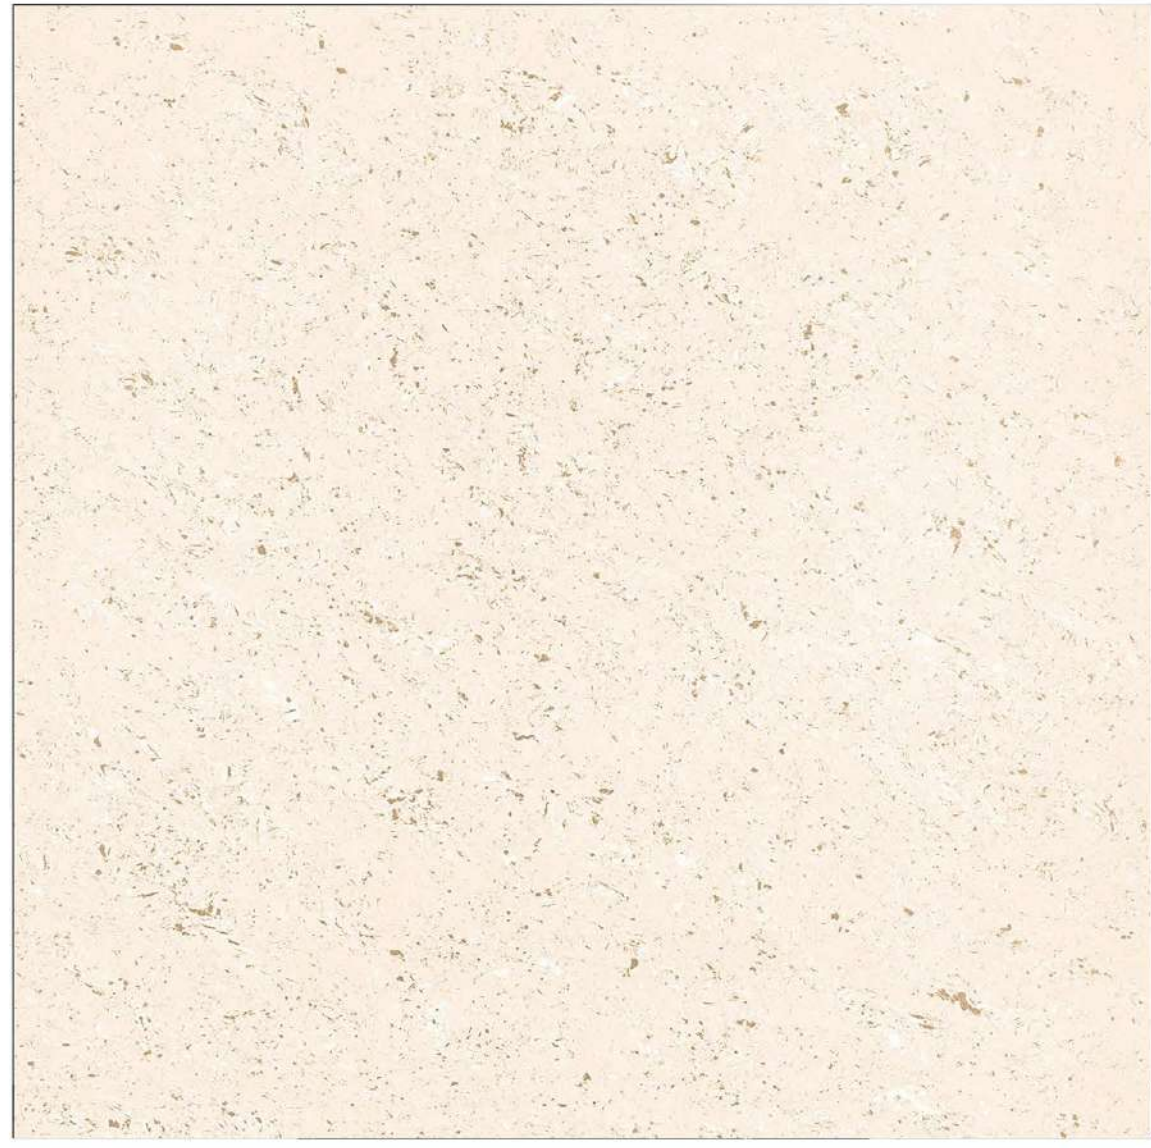

11001




11002

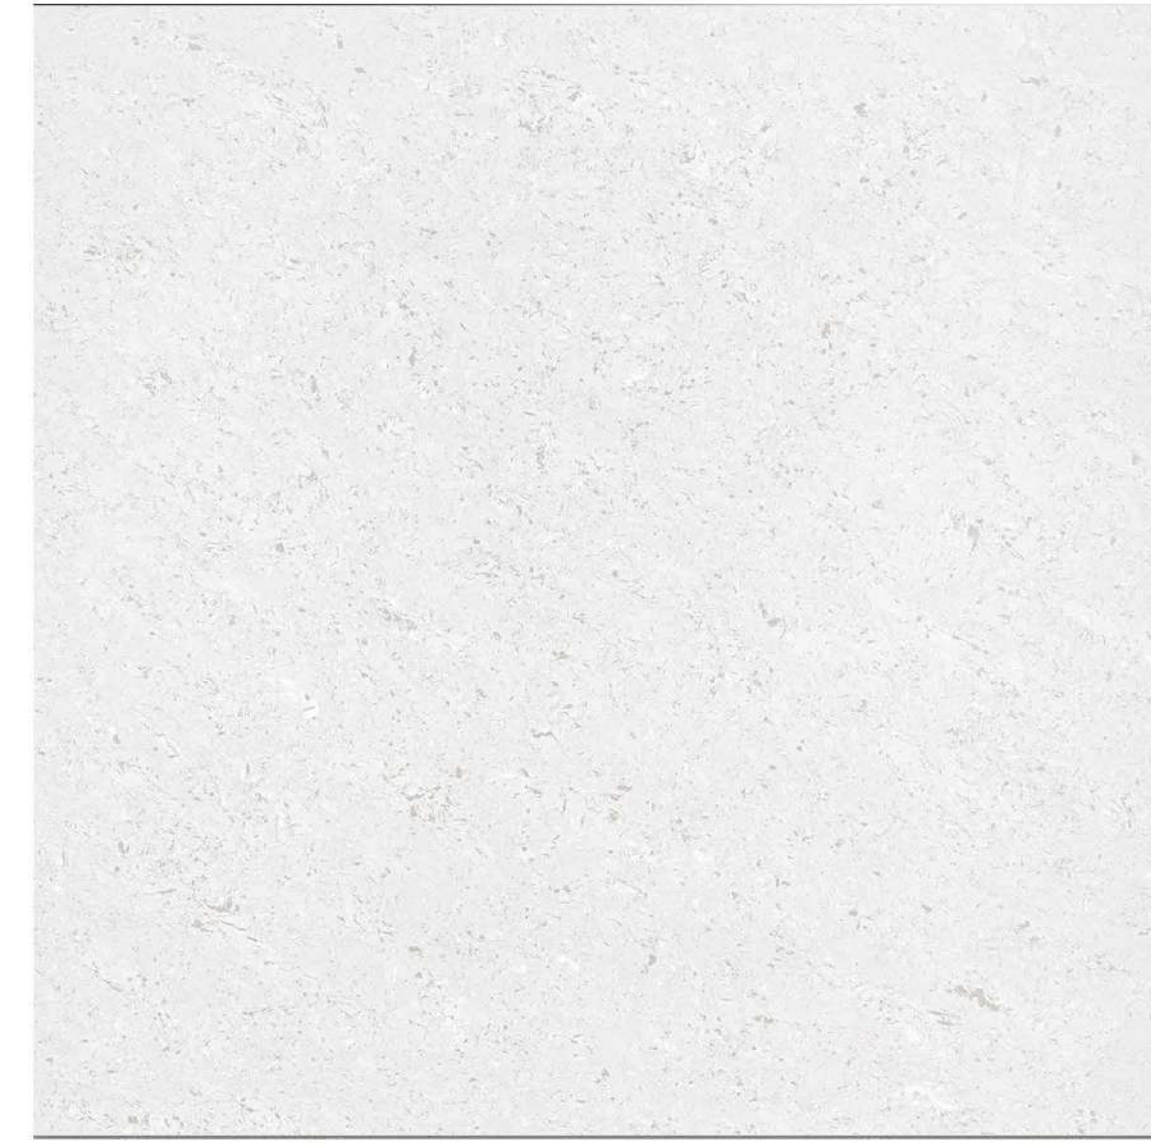

11003



11004

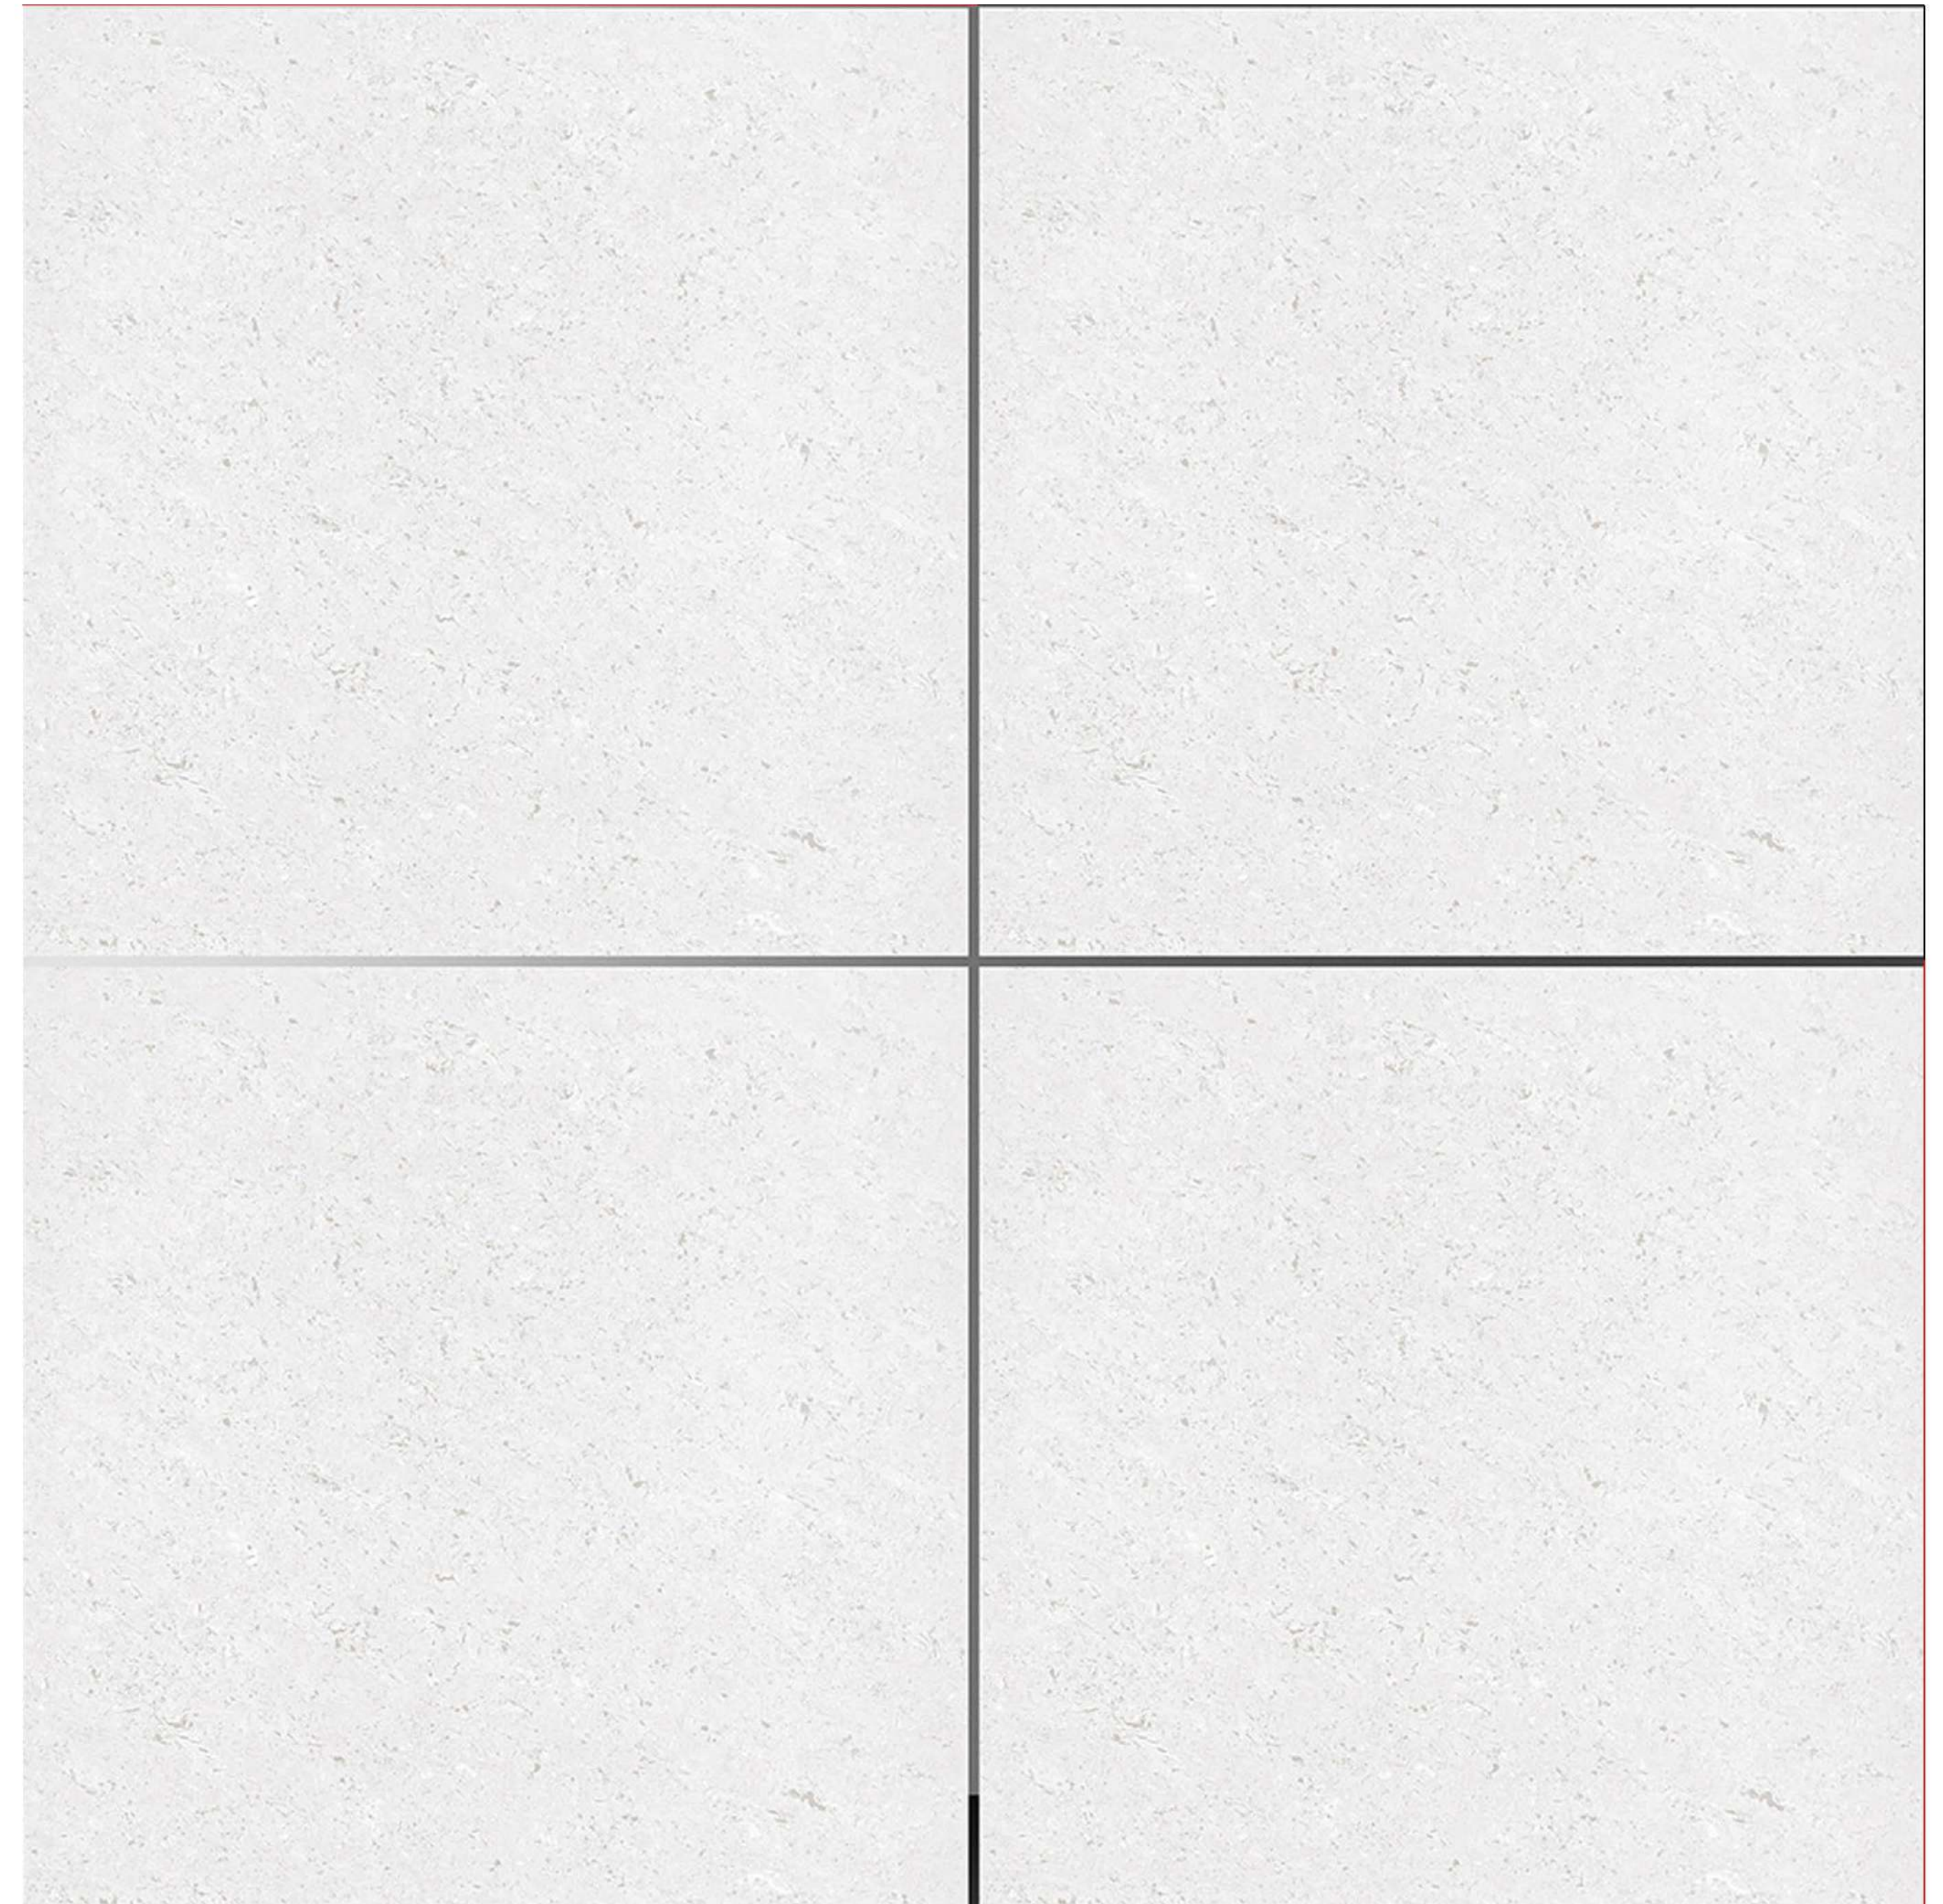



LEADSUN

**MATT
SERIES**

APPLICATIONS



WHITE BODY

**600MMx600MM
PORCELAIN TILES**



11005




11006



11007



11008

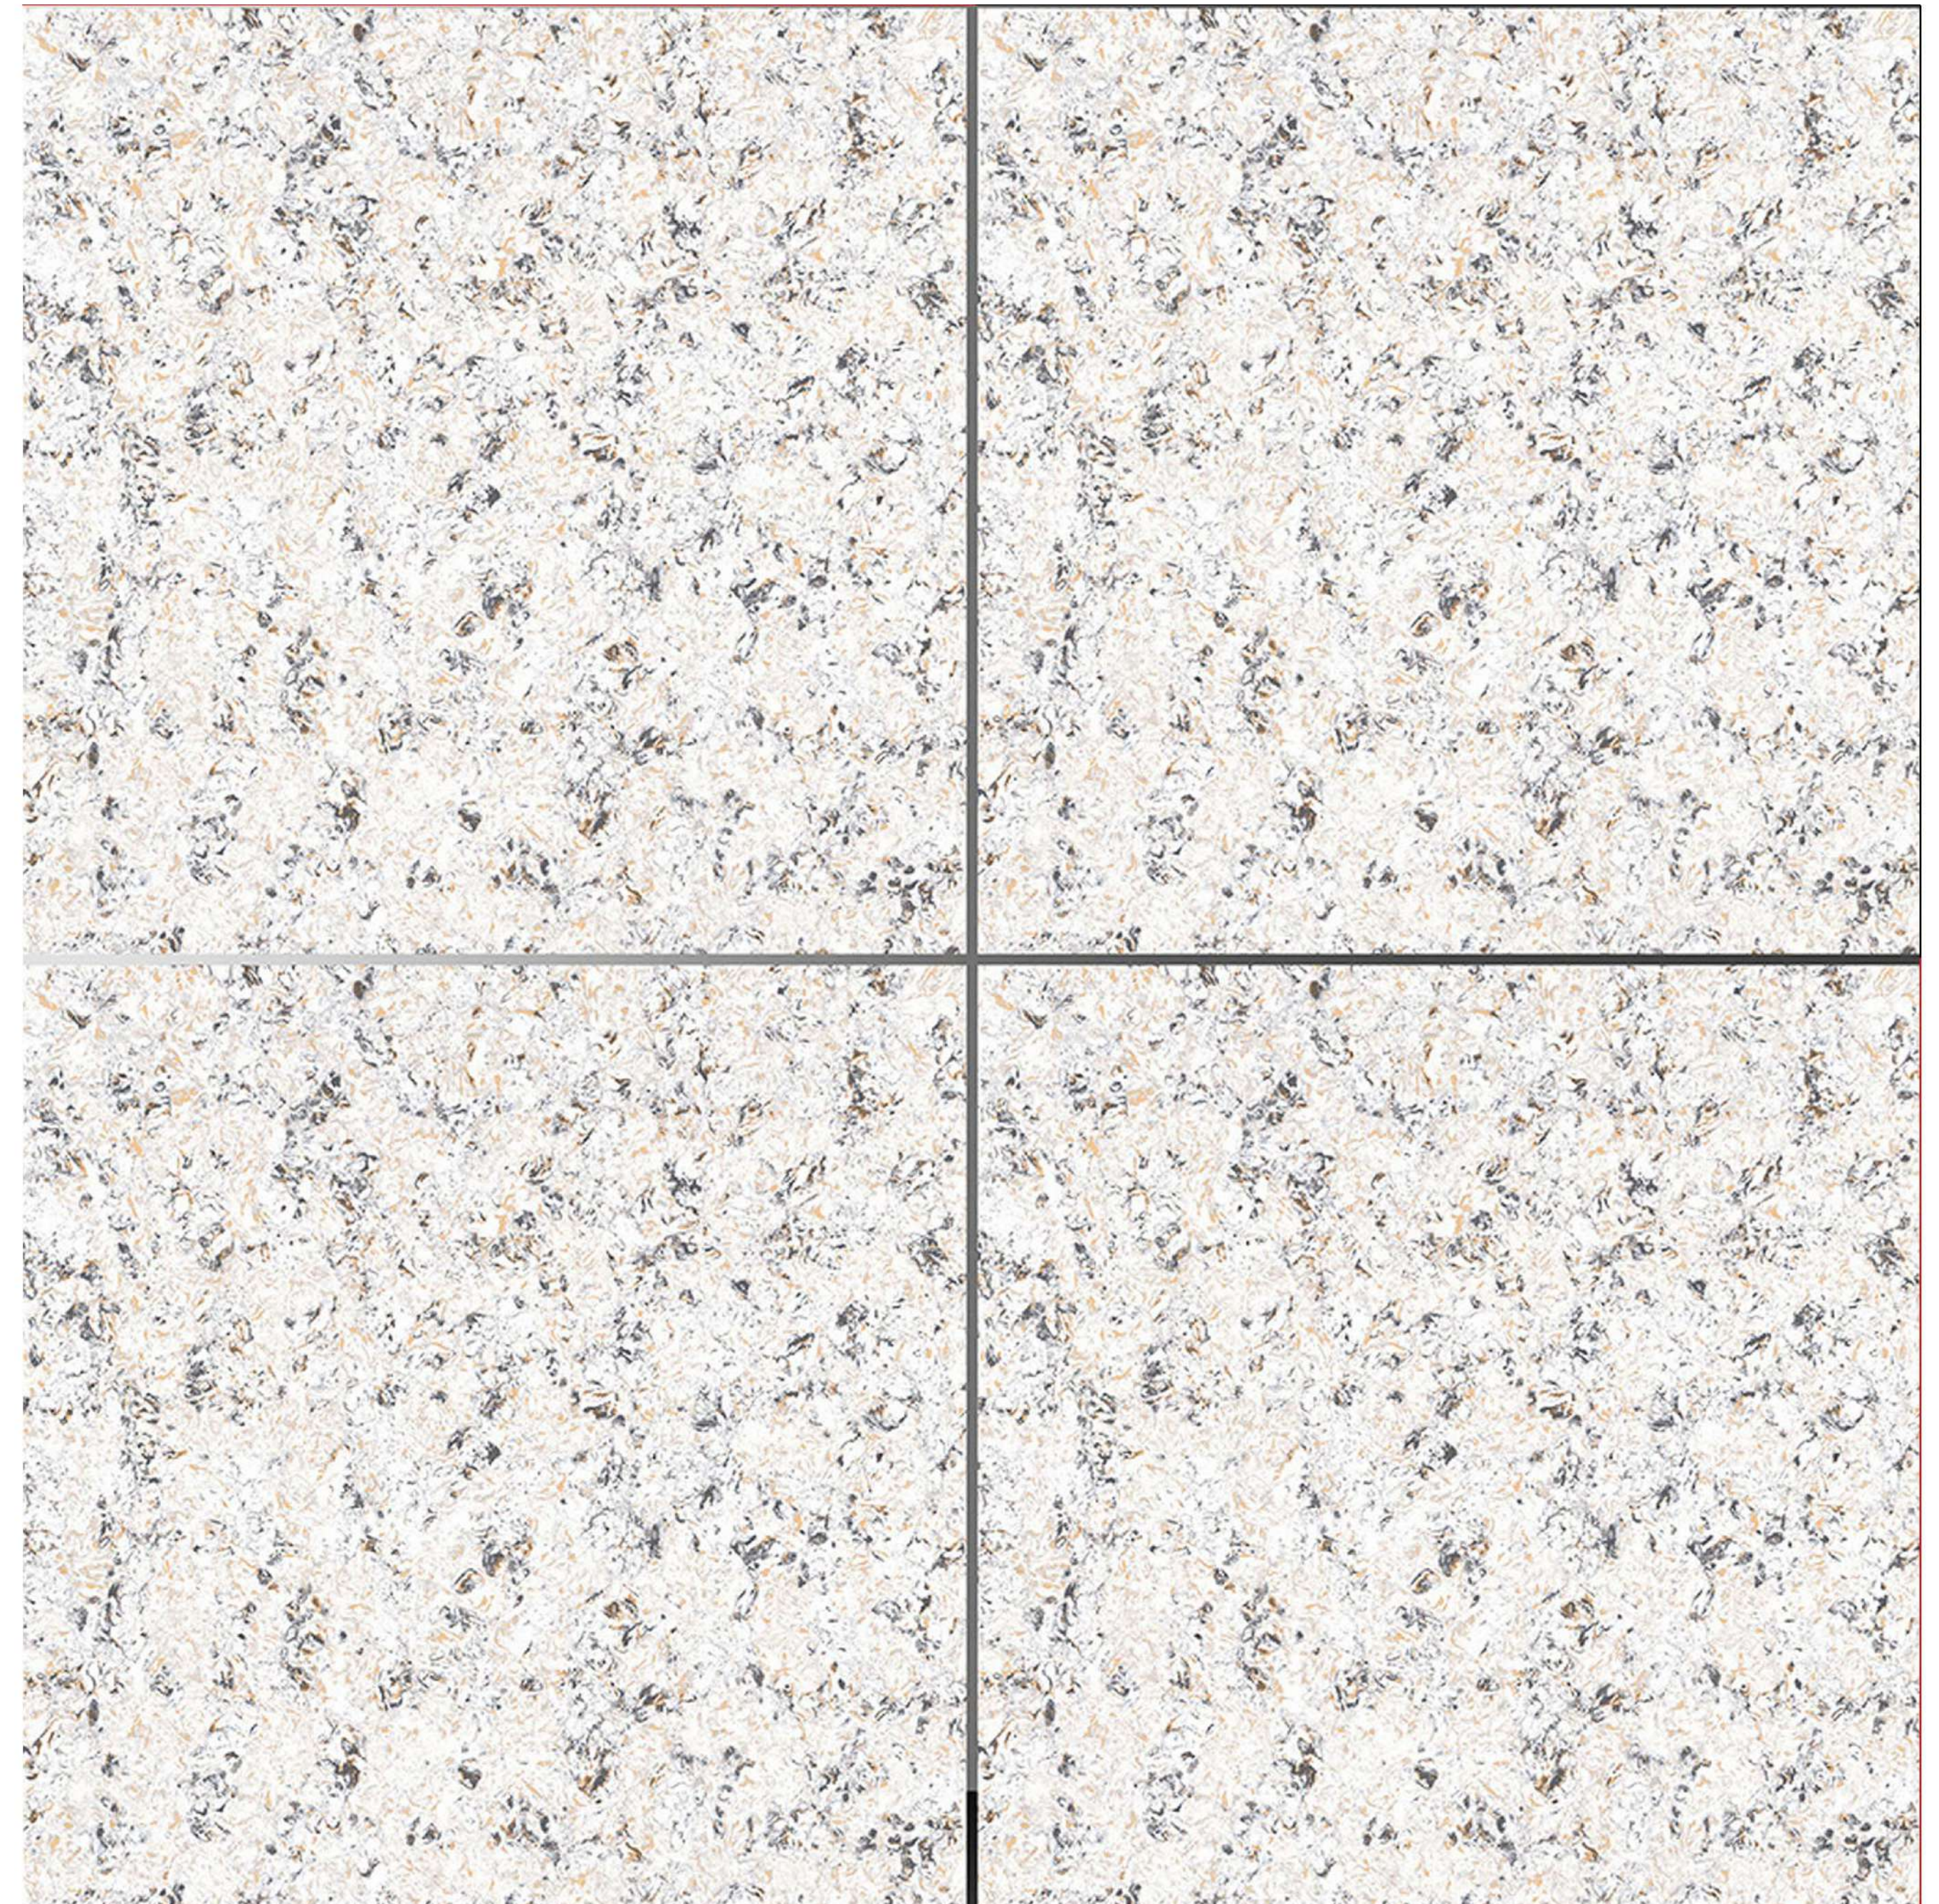



LEADSUN

**MATT
SERIES**

APPLICATIONS



WHITE BODY

**600MMx600MM
PORCELAIN TILES**




11009





11010



11011

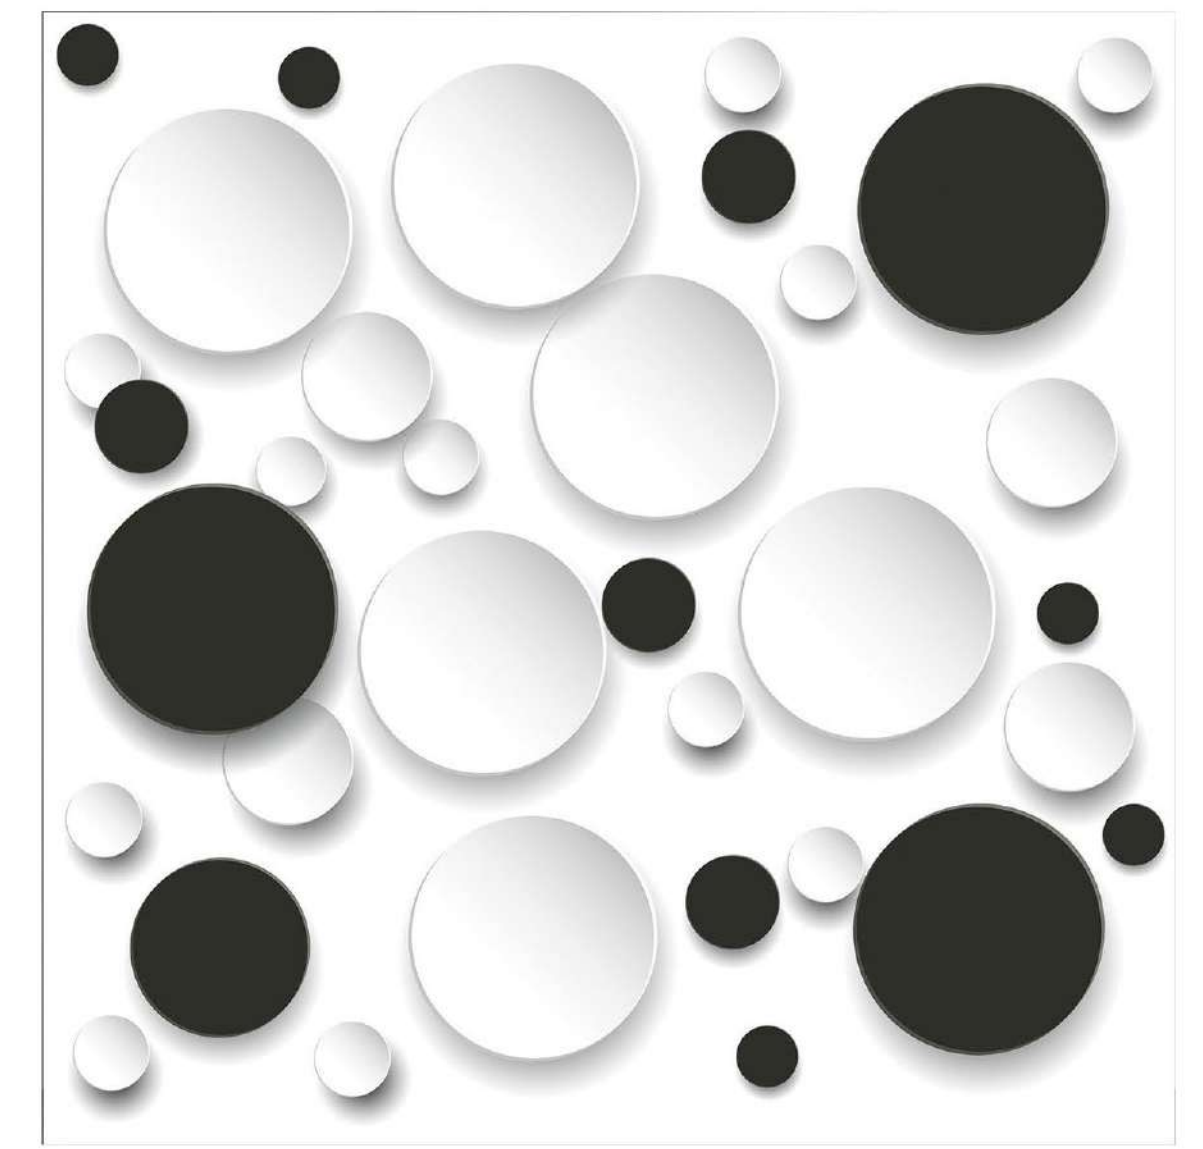

11012

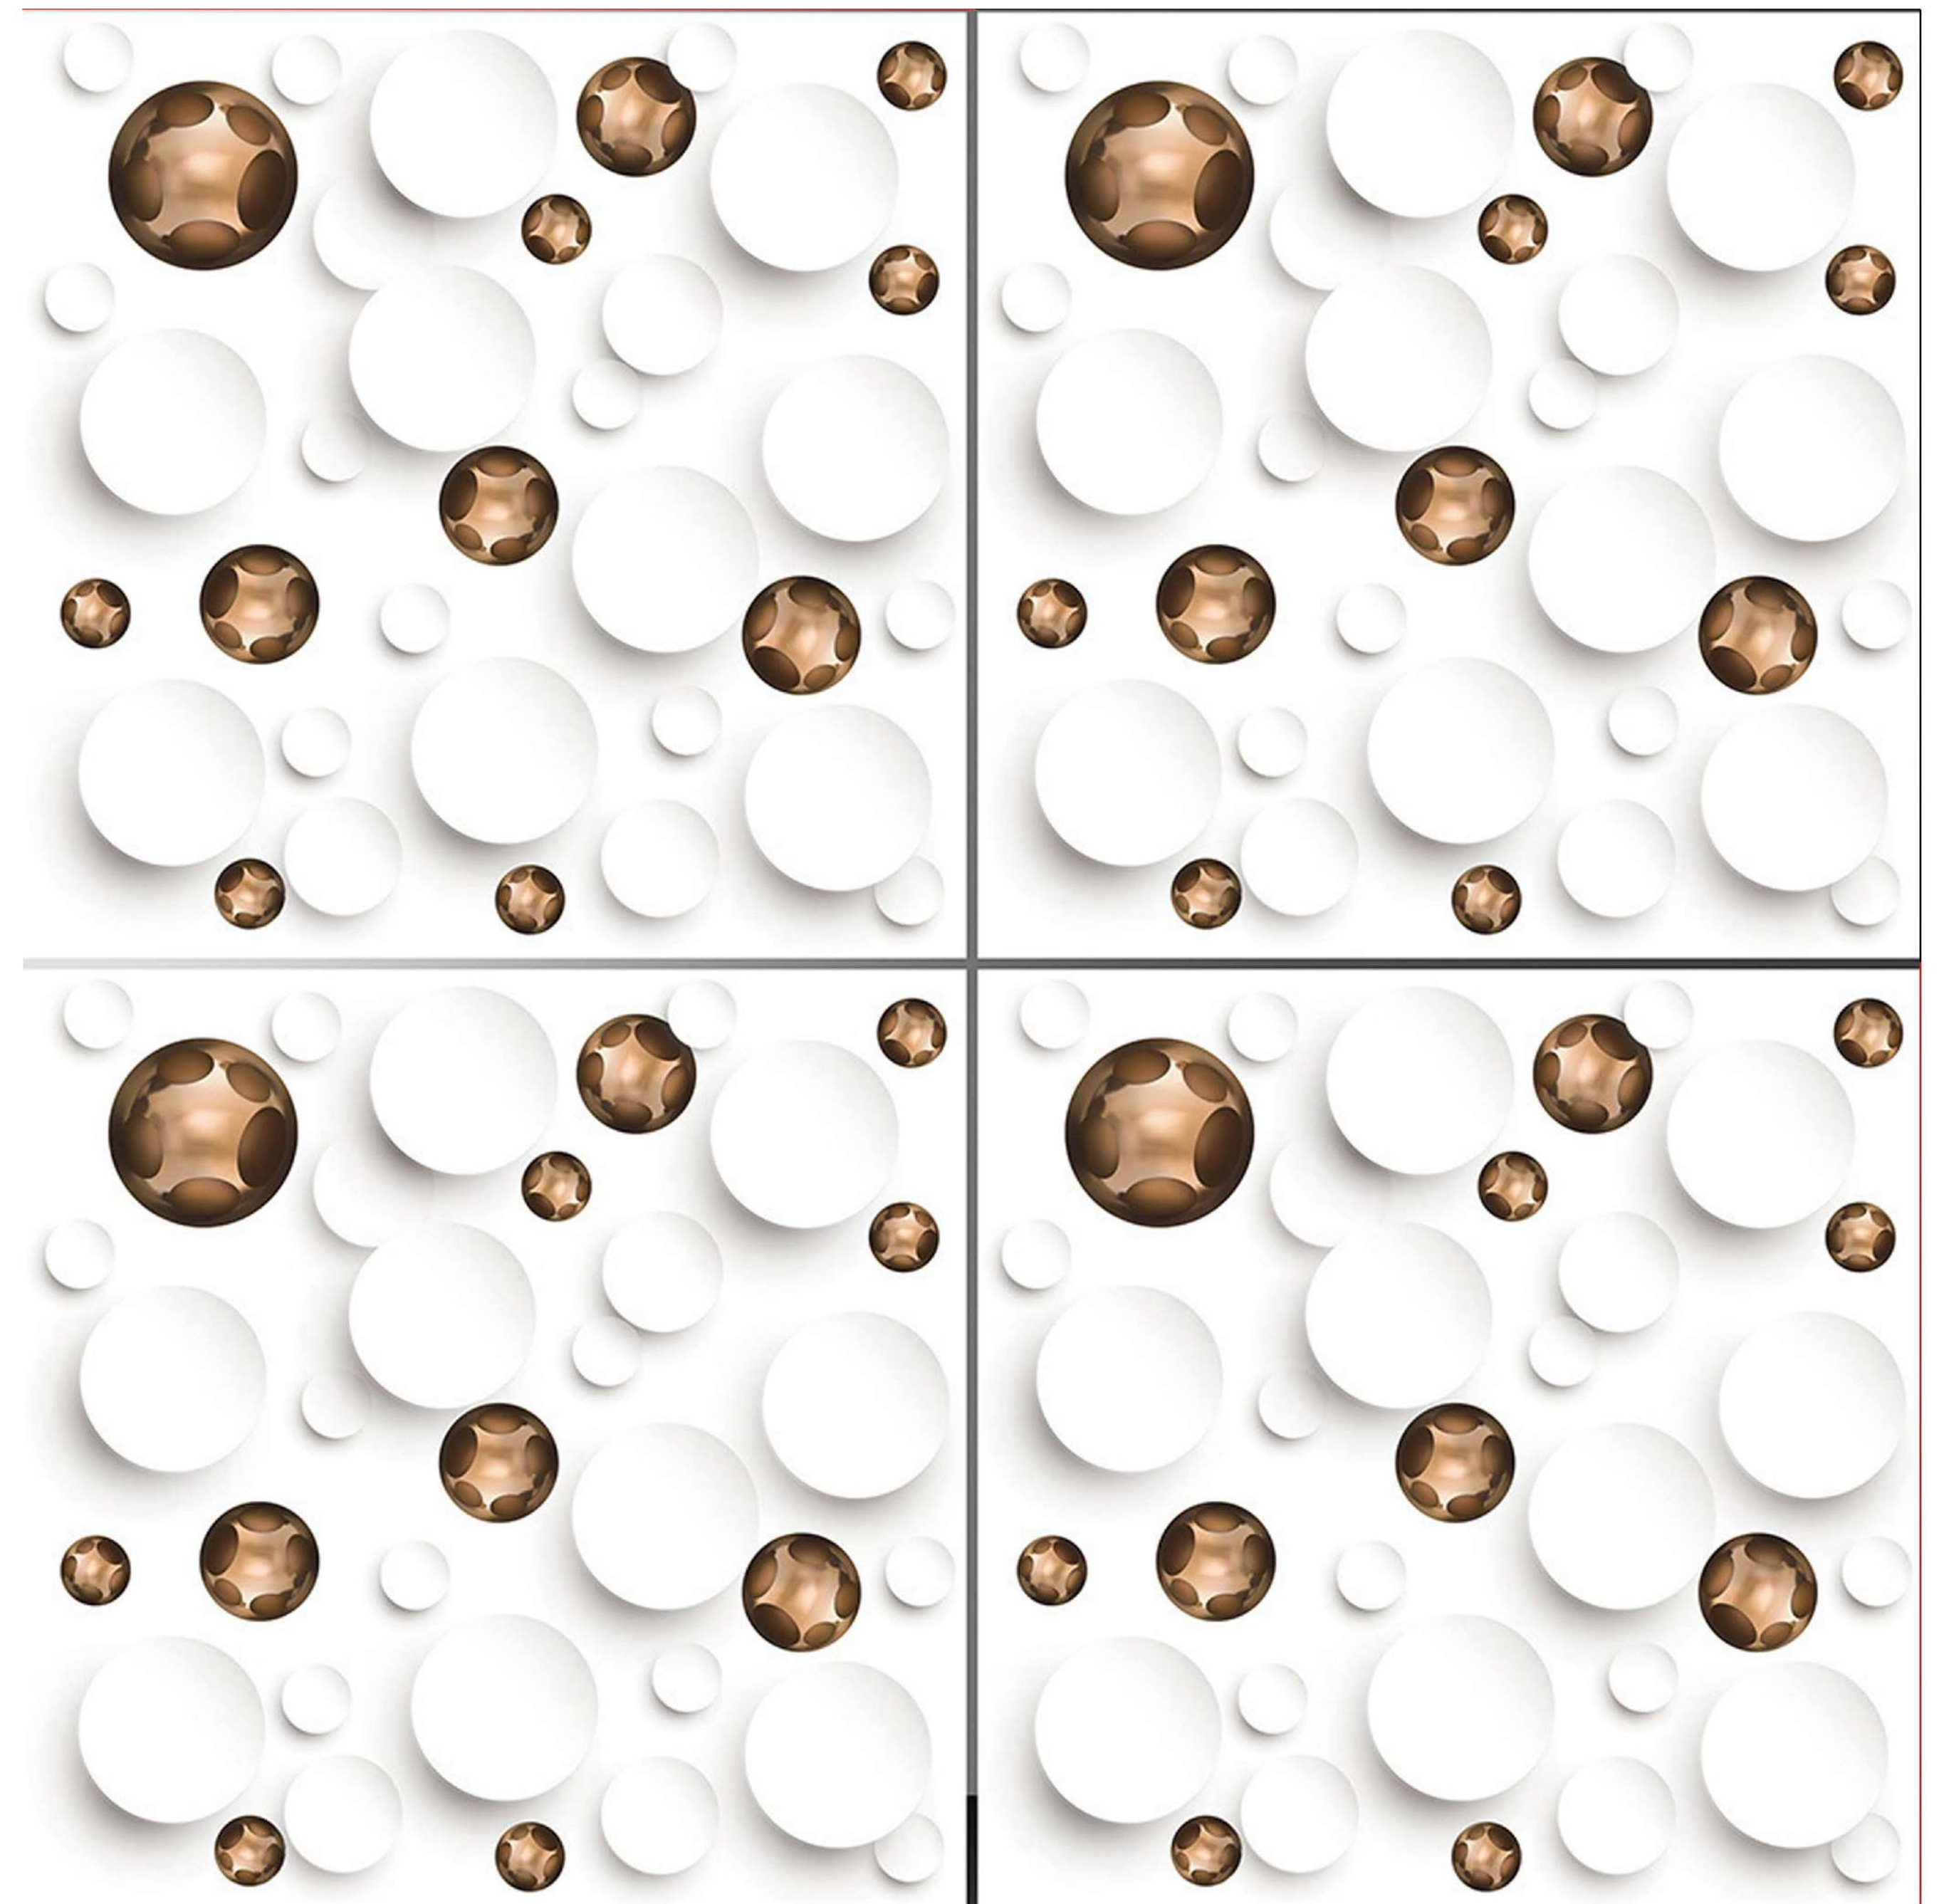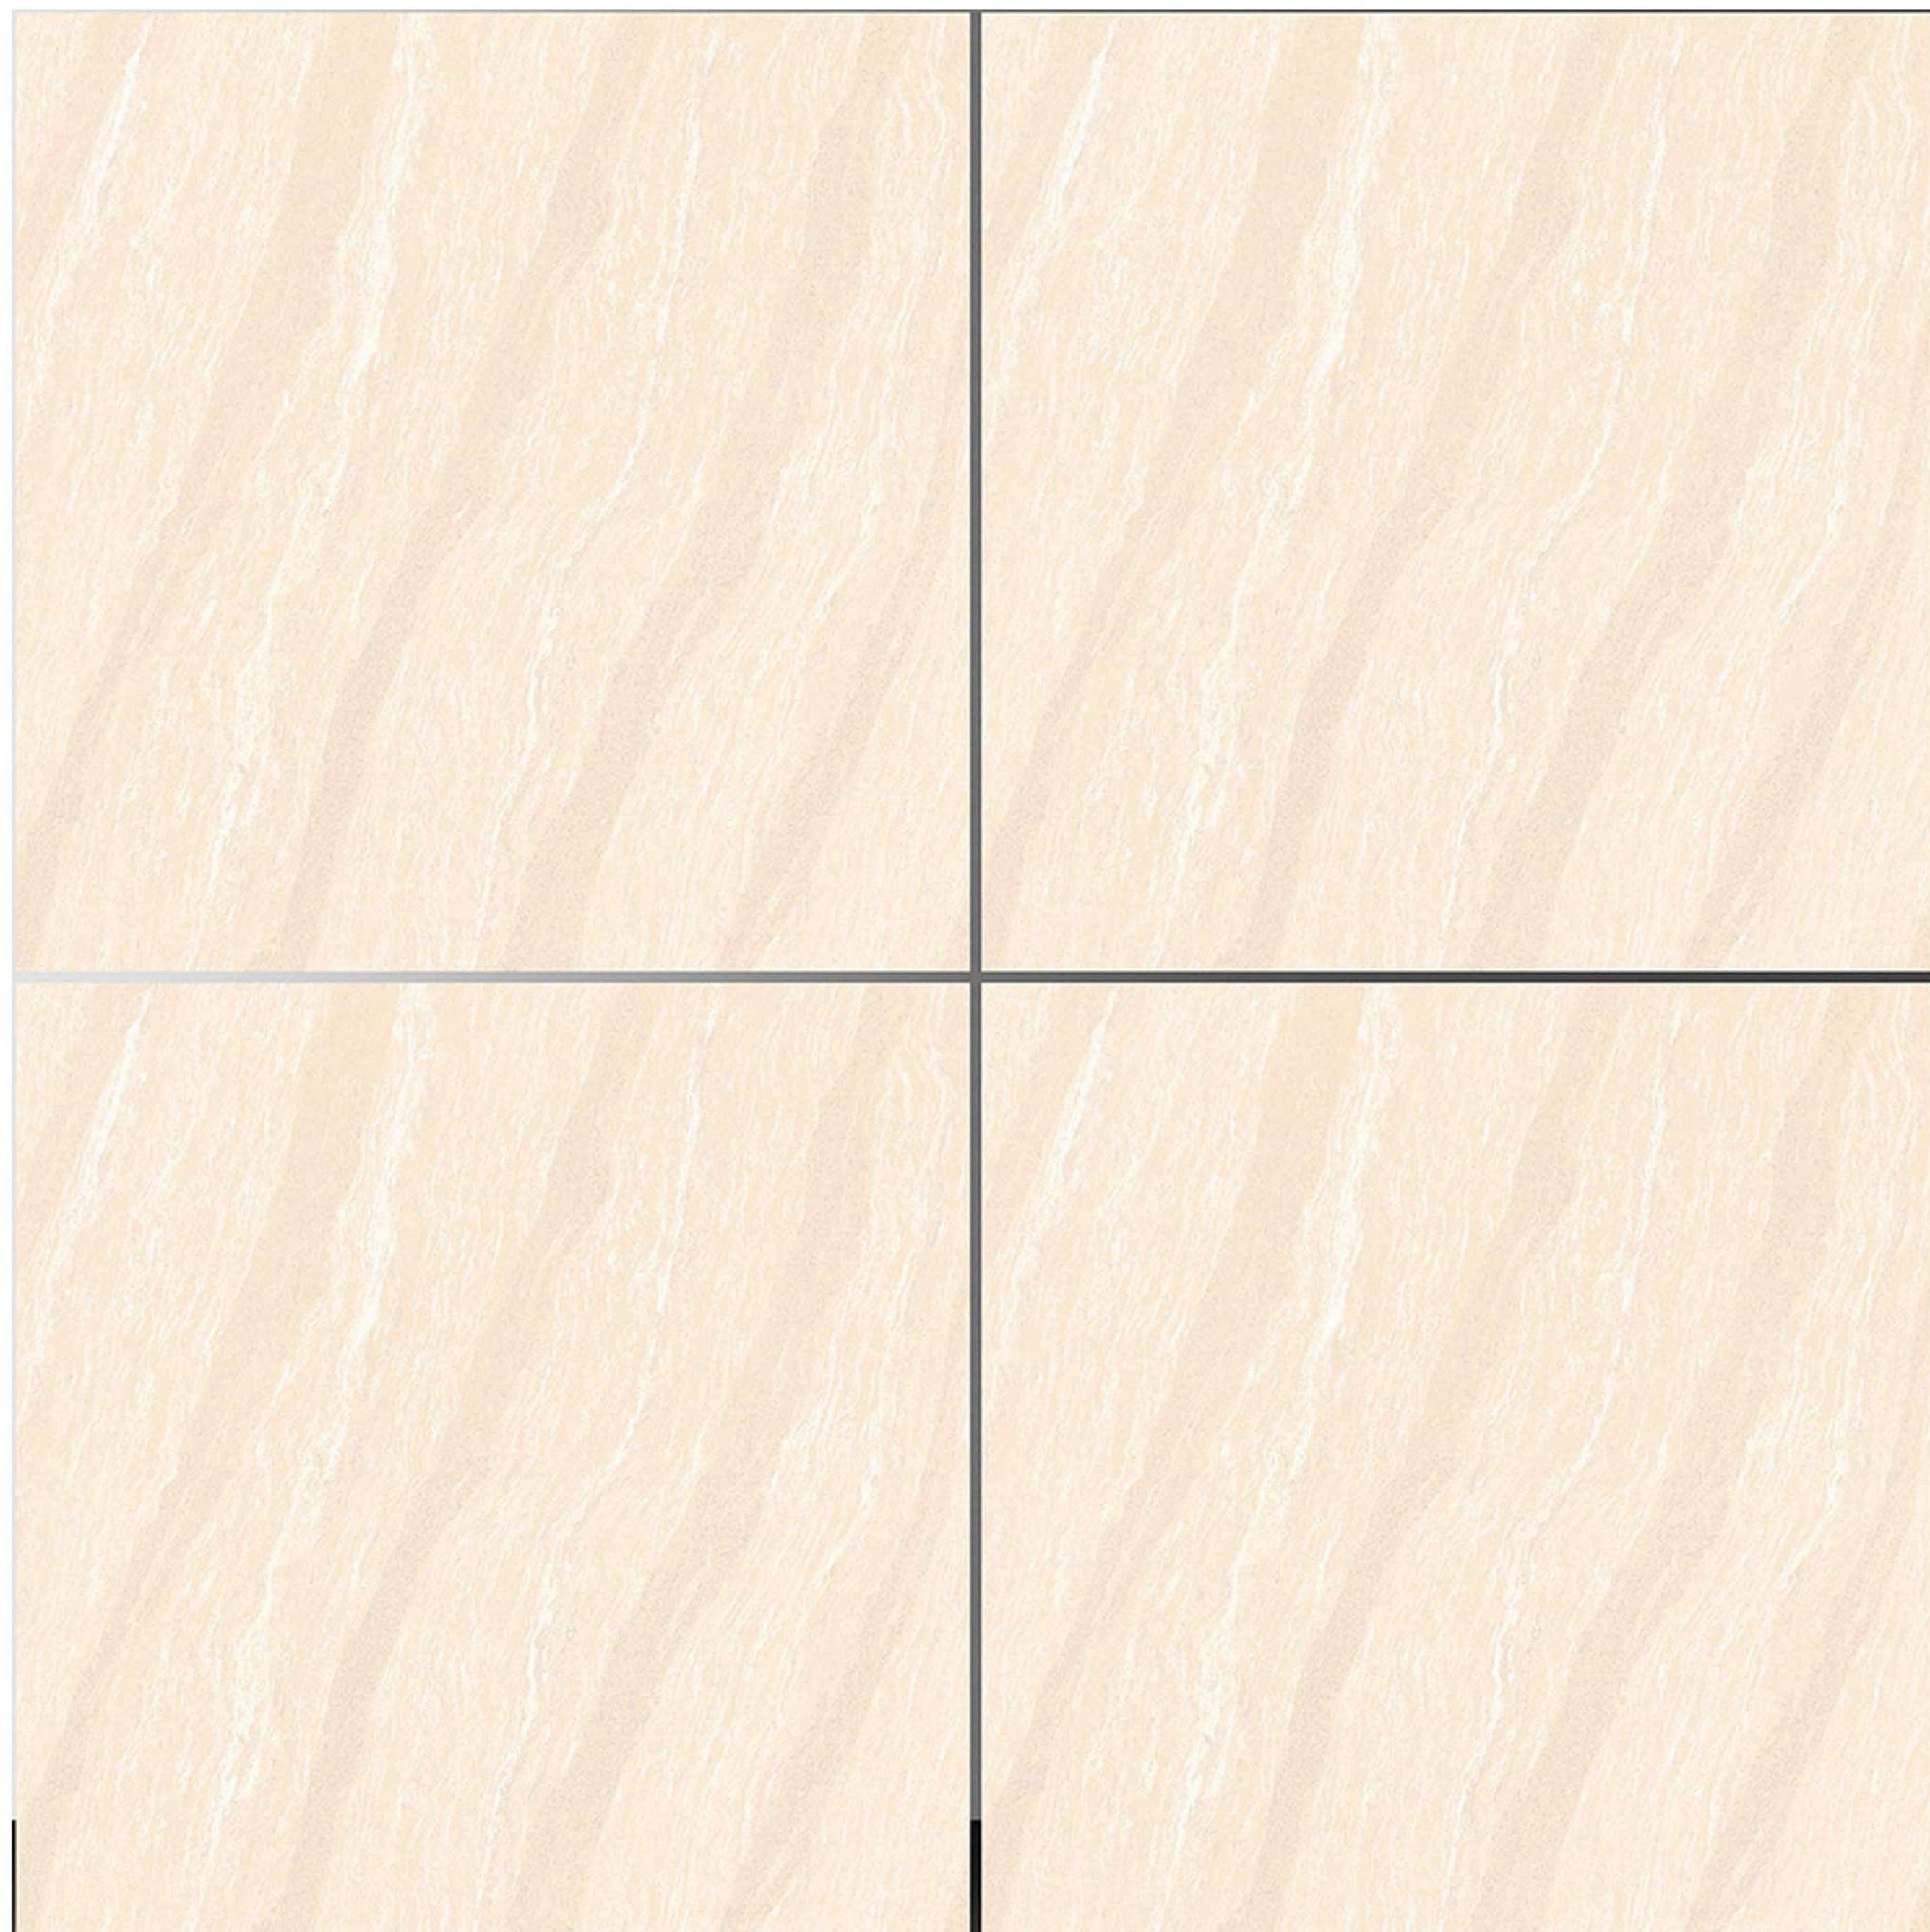



LEADSUN


**MATT
SERIES**

APPLICATIONS




WHITE BODY


**600MMx600MM
PORCELAIN TILES**

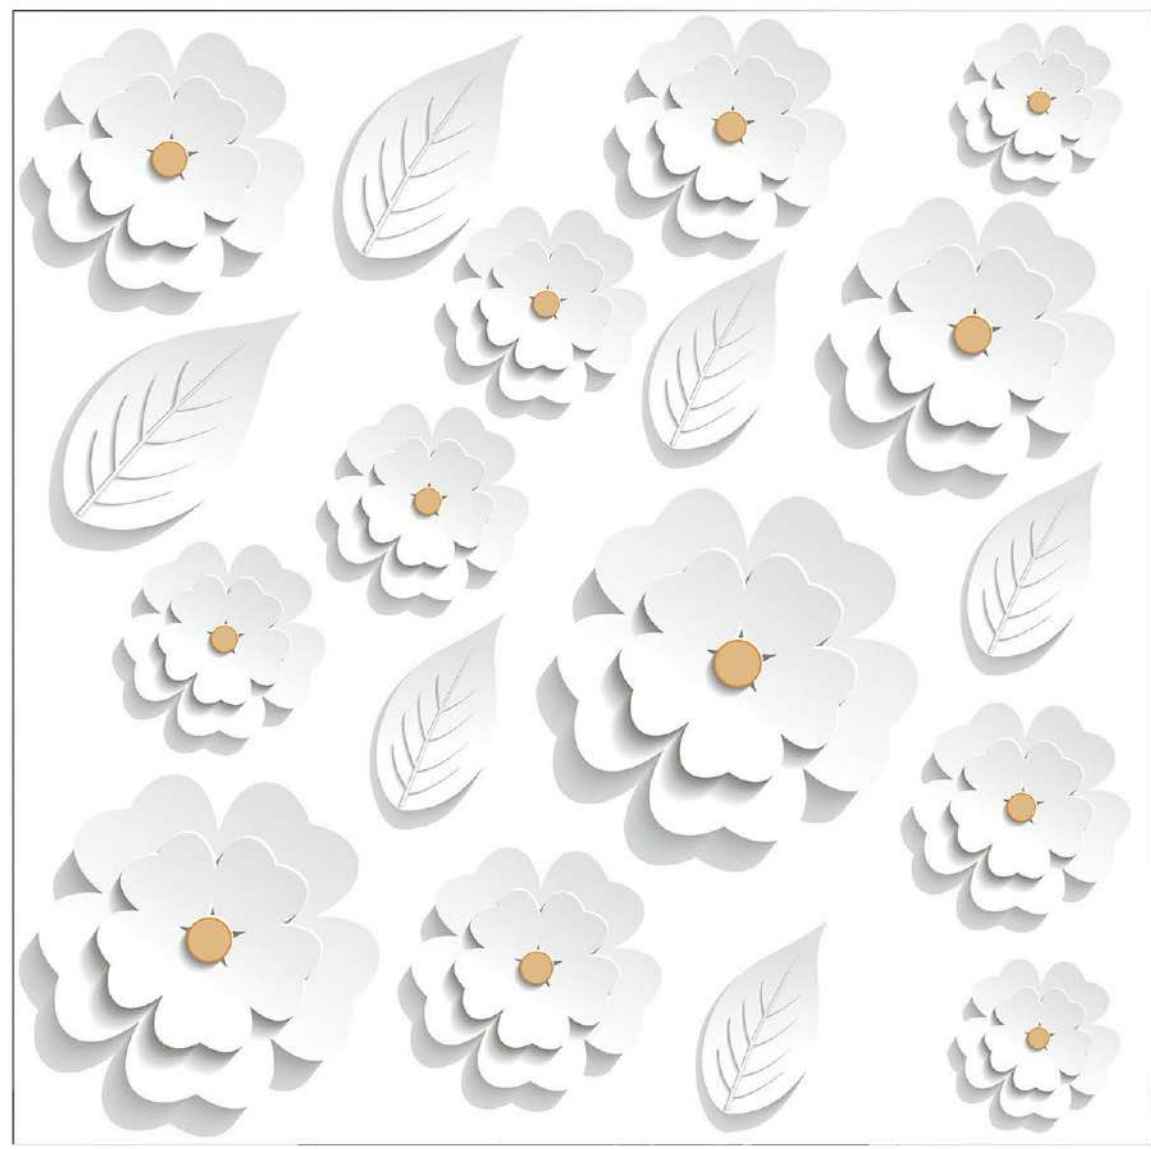


11013

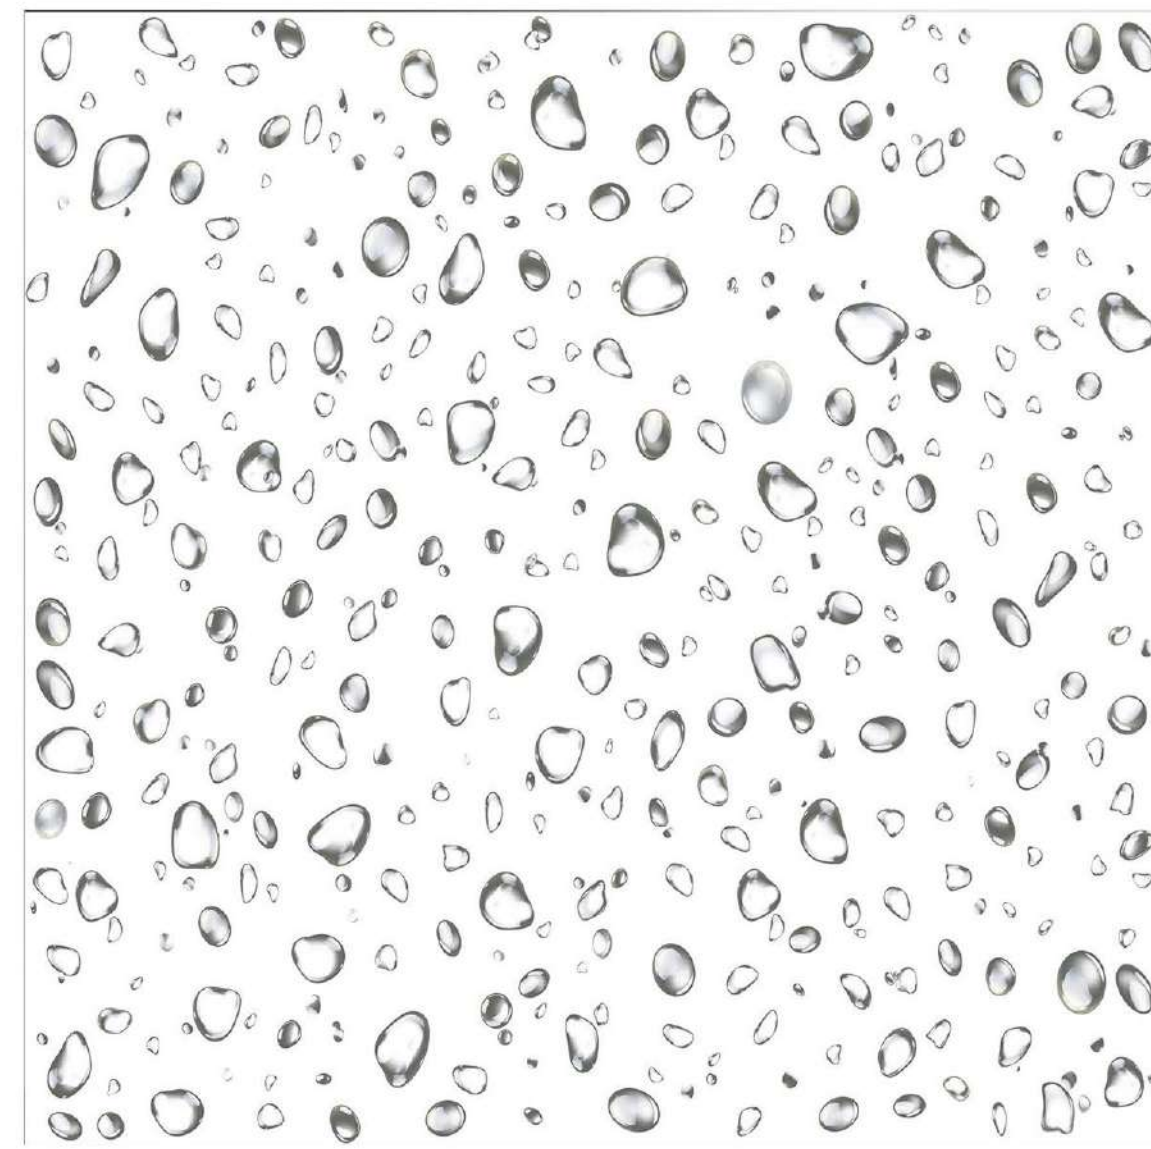



11014

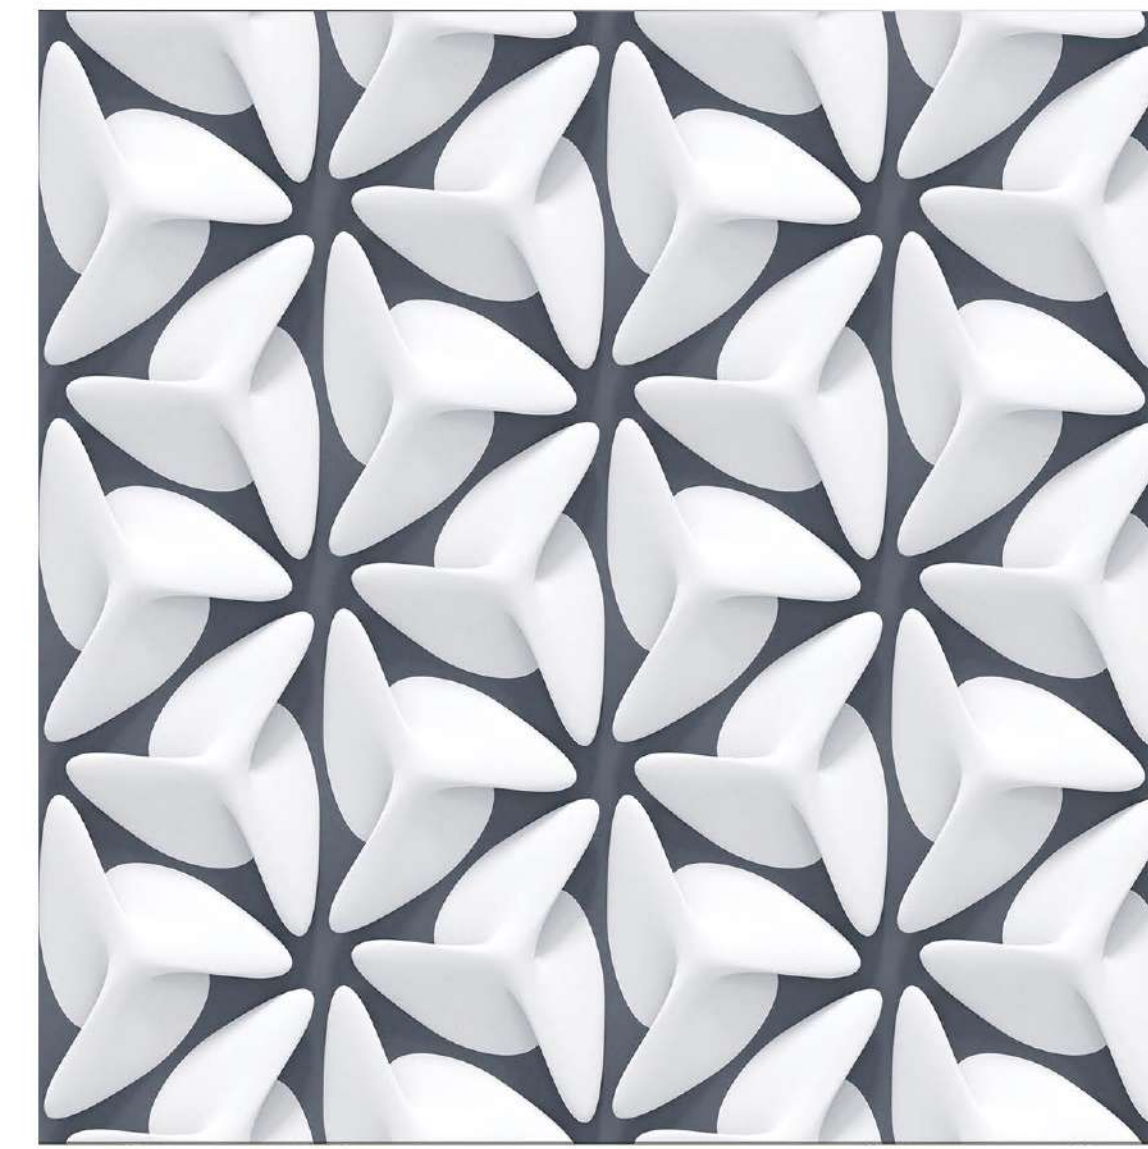

11015

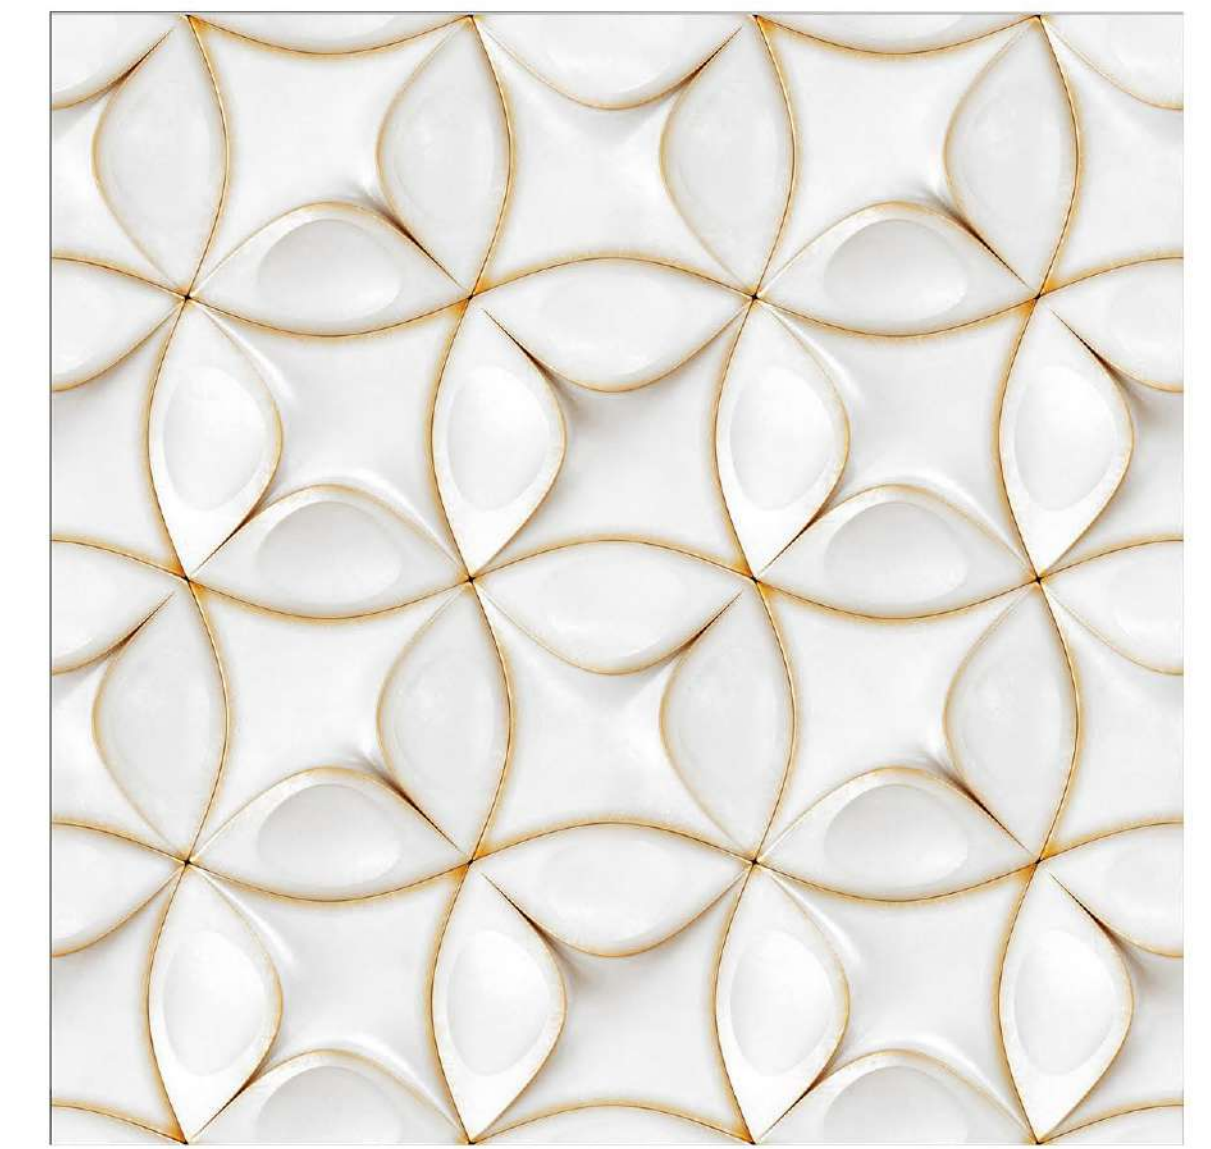

11016

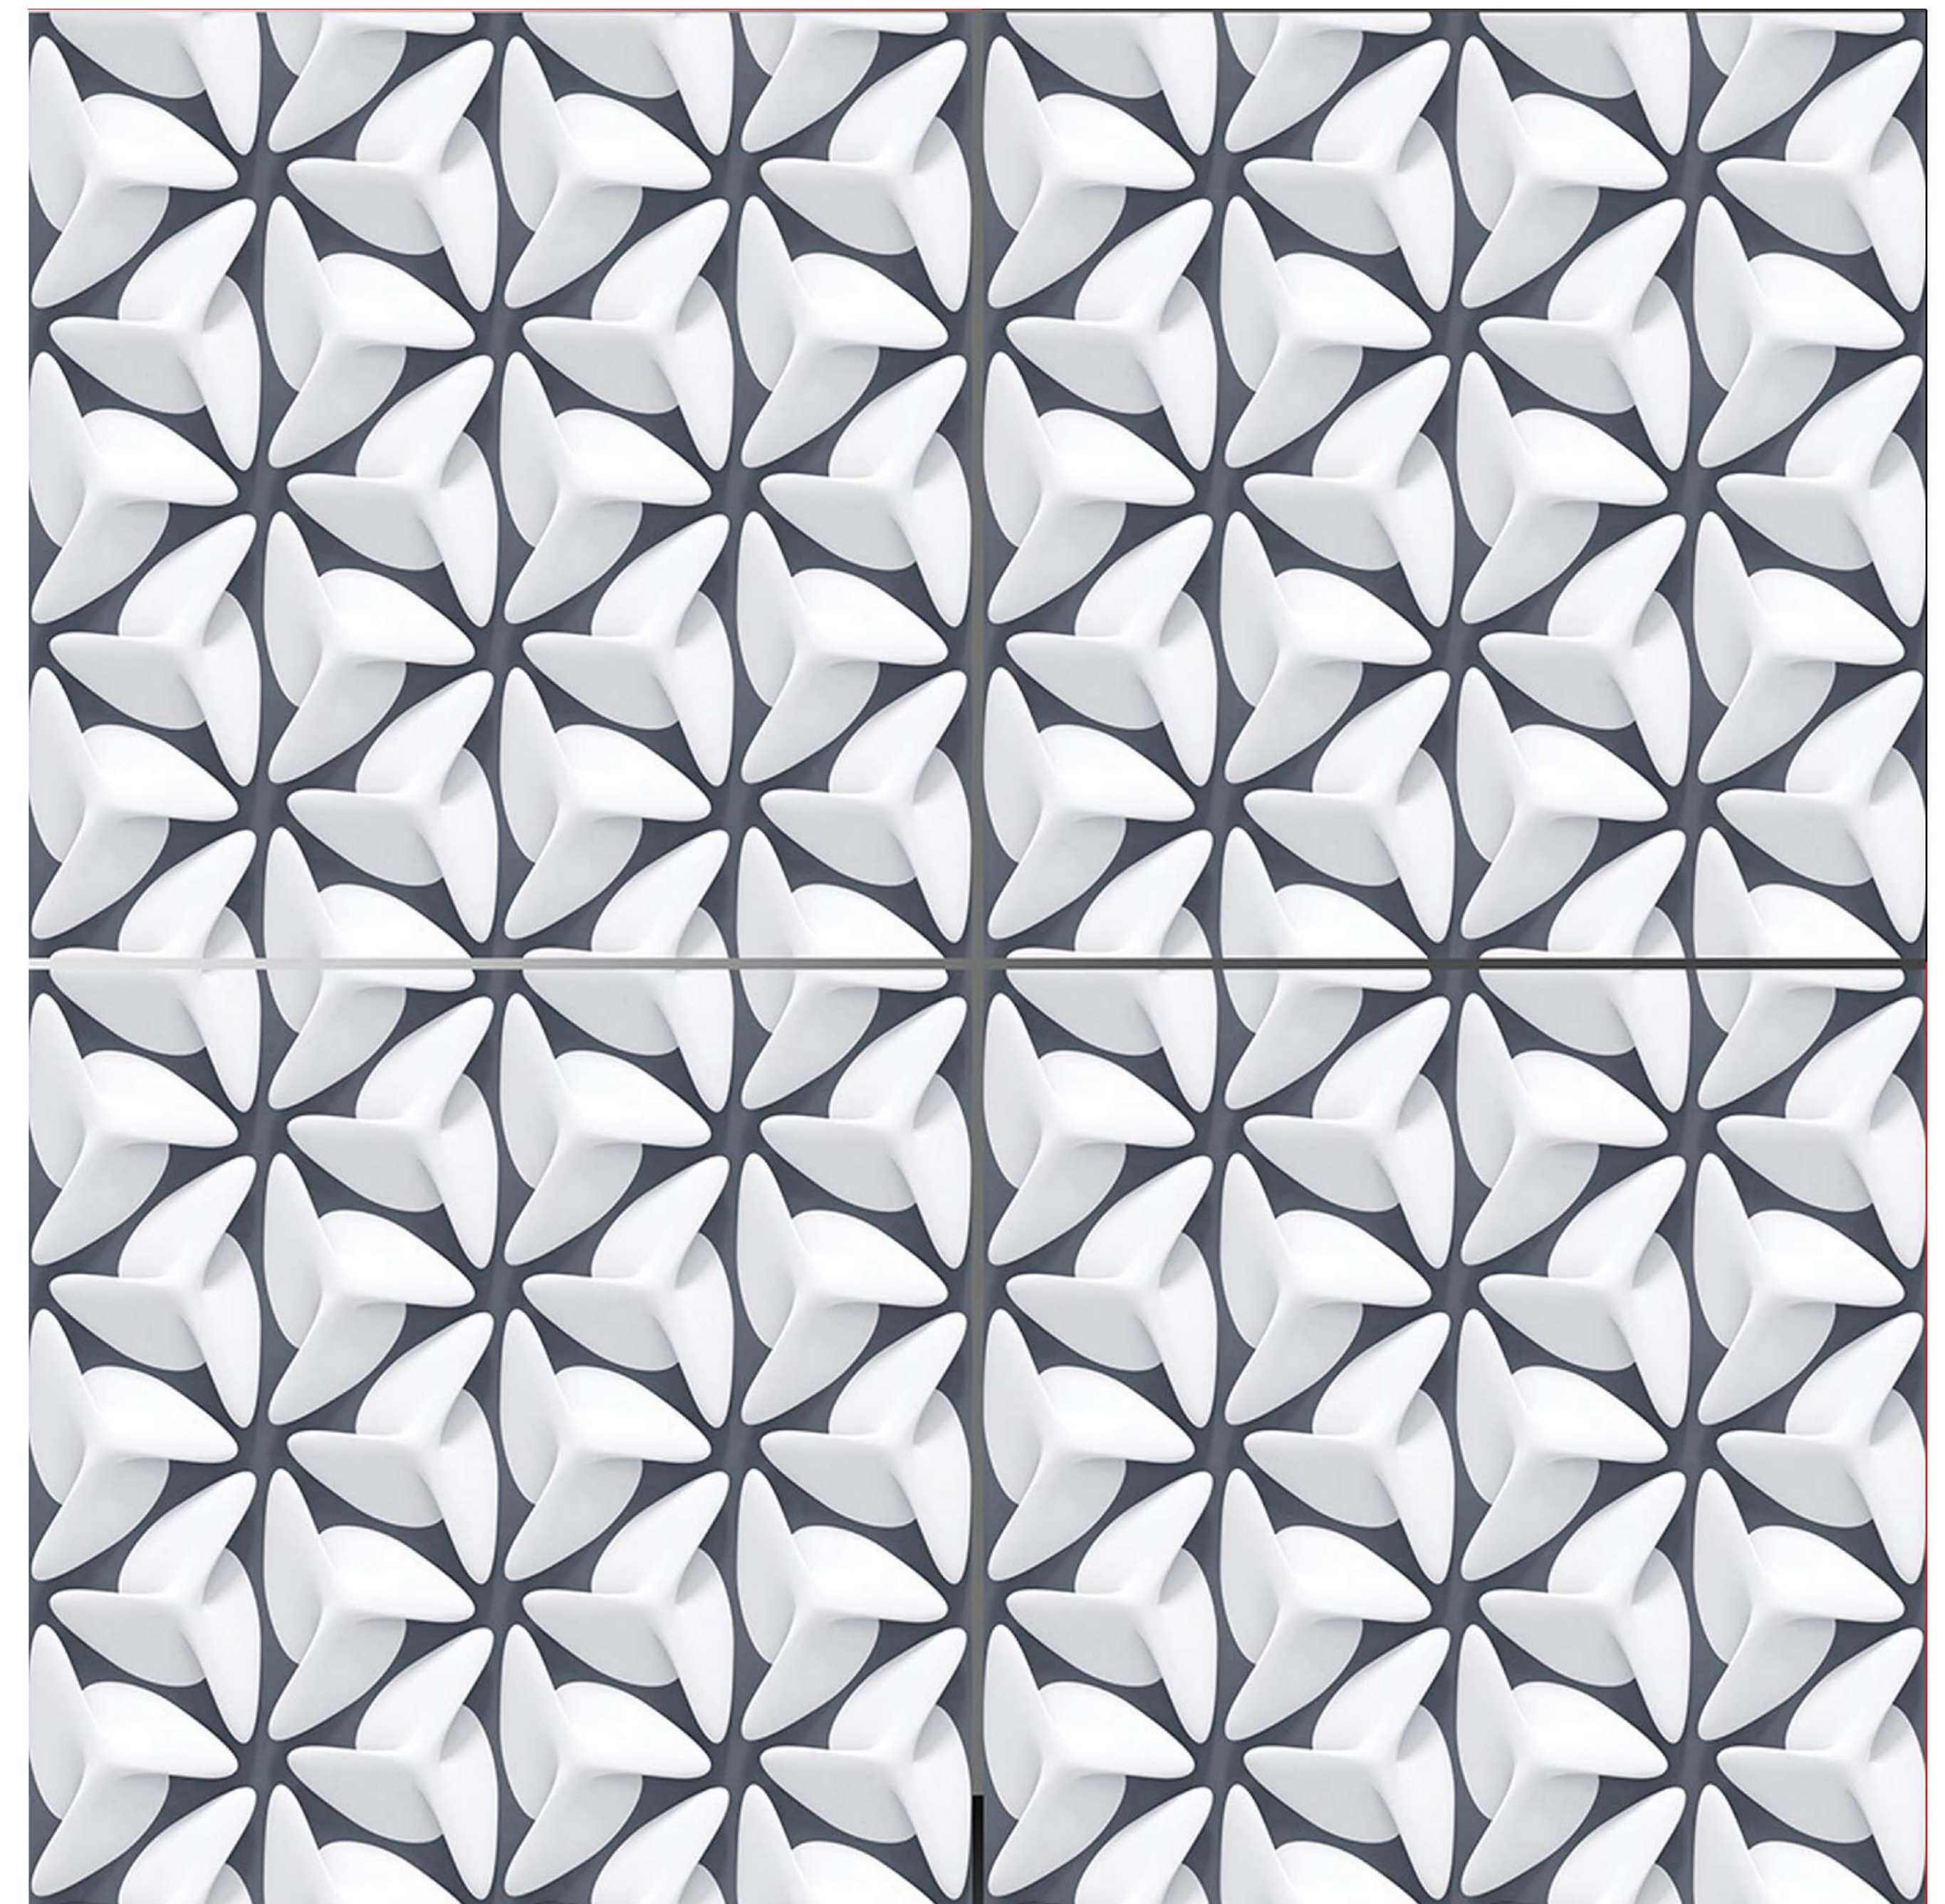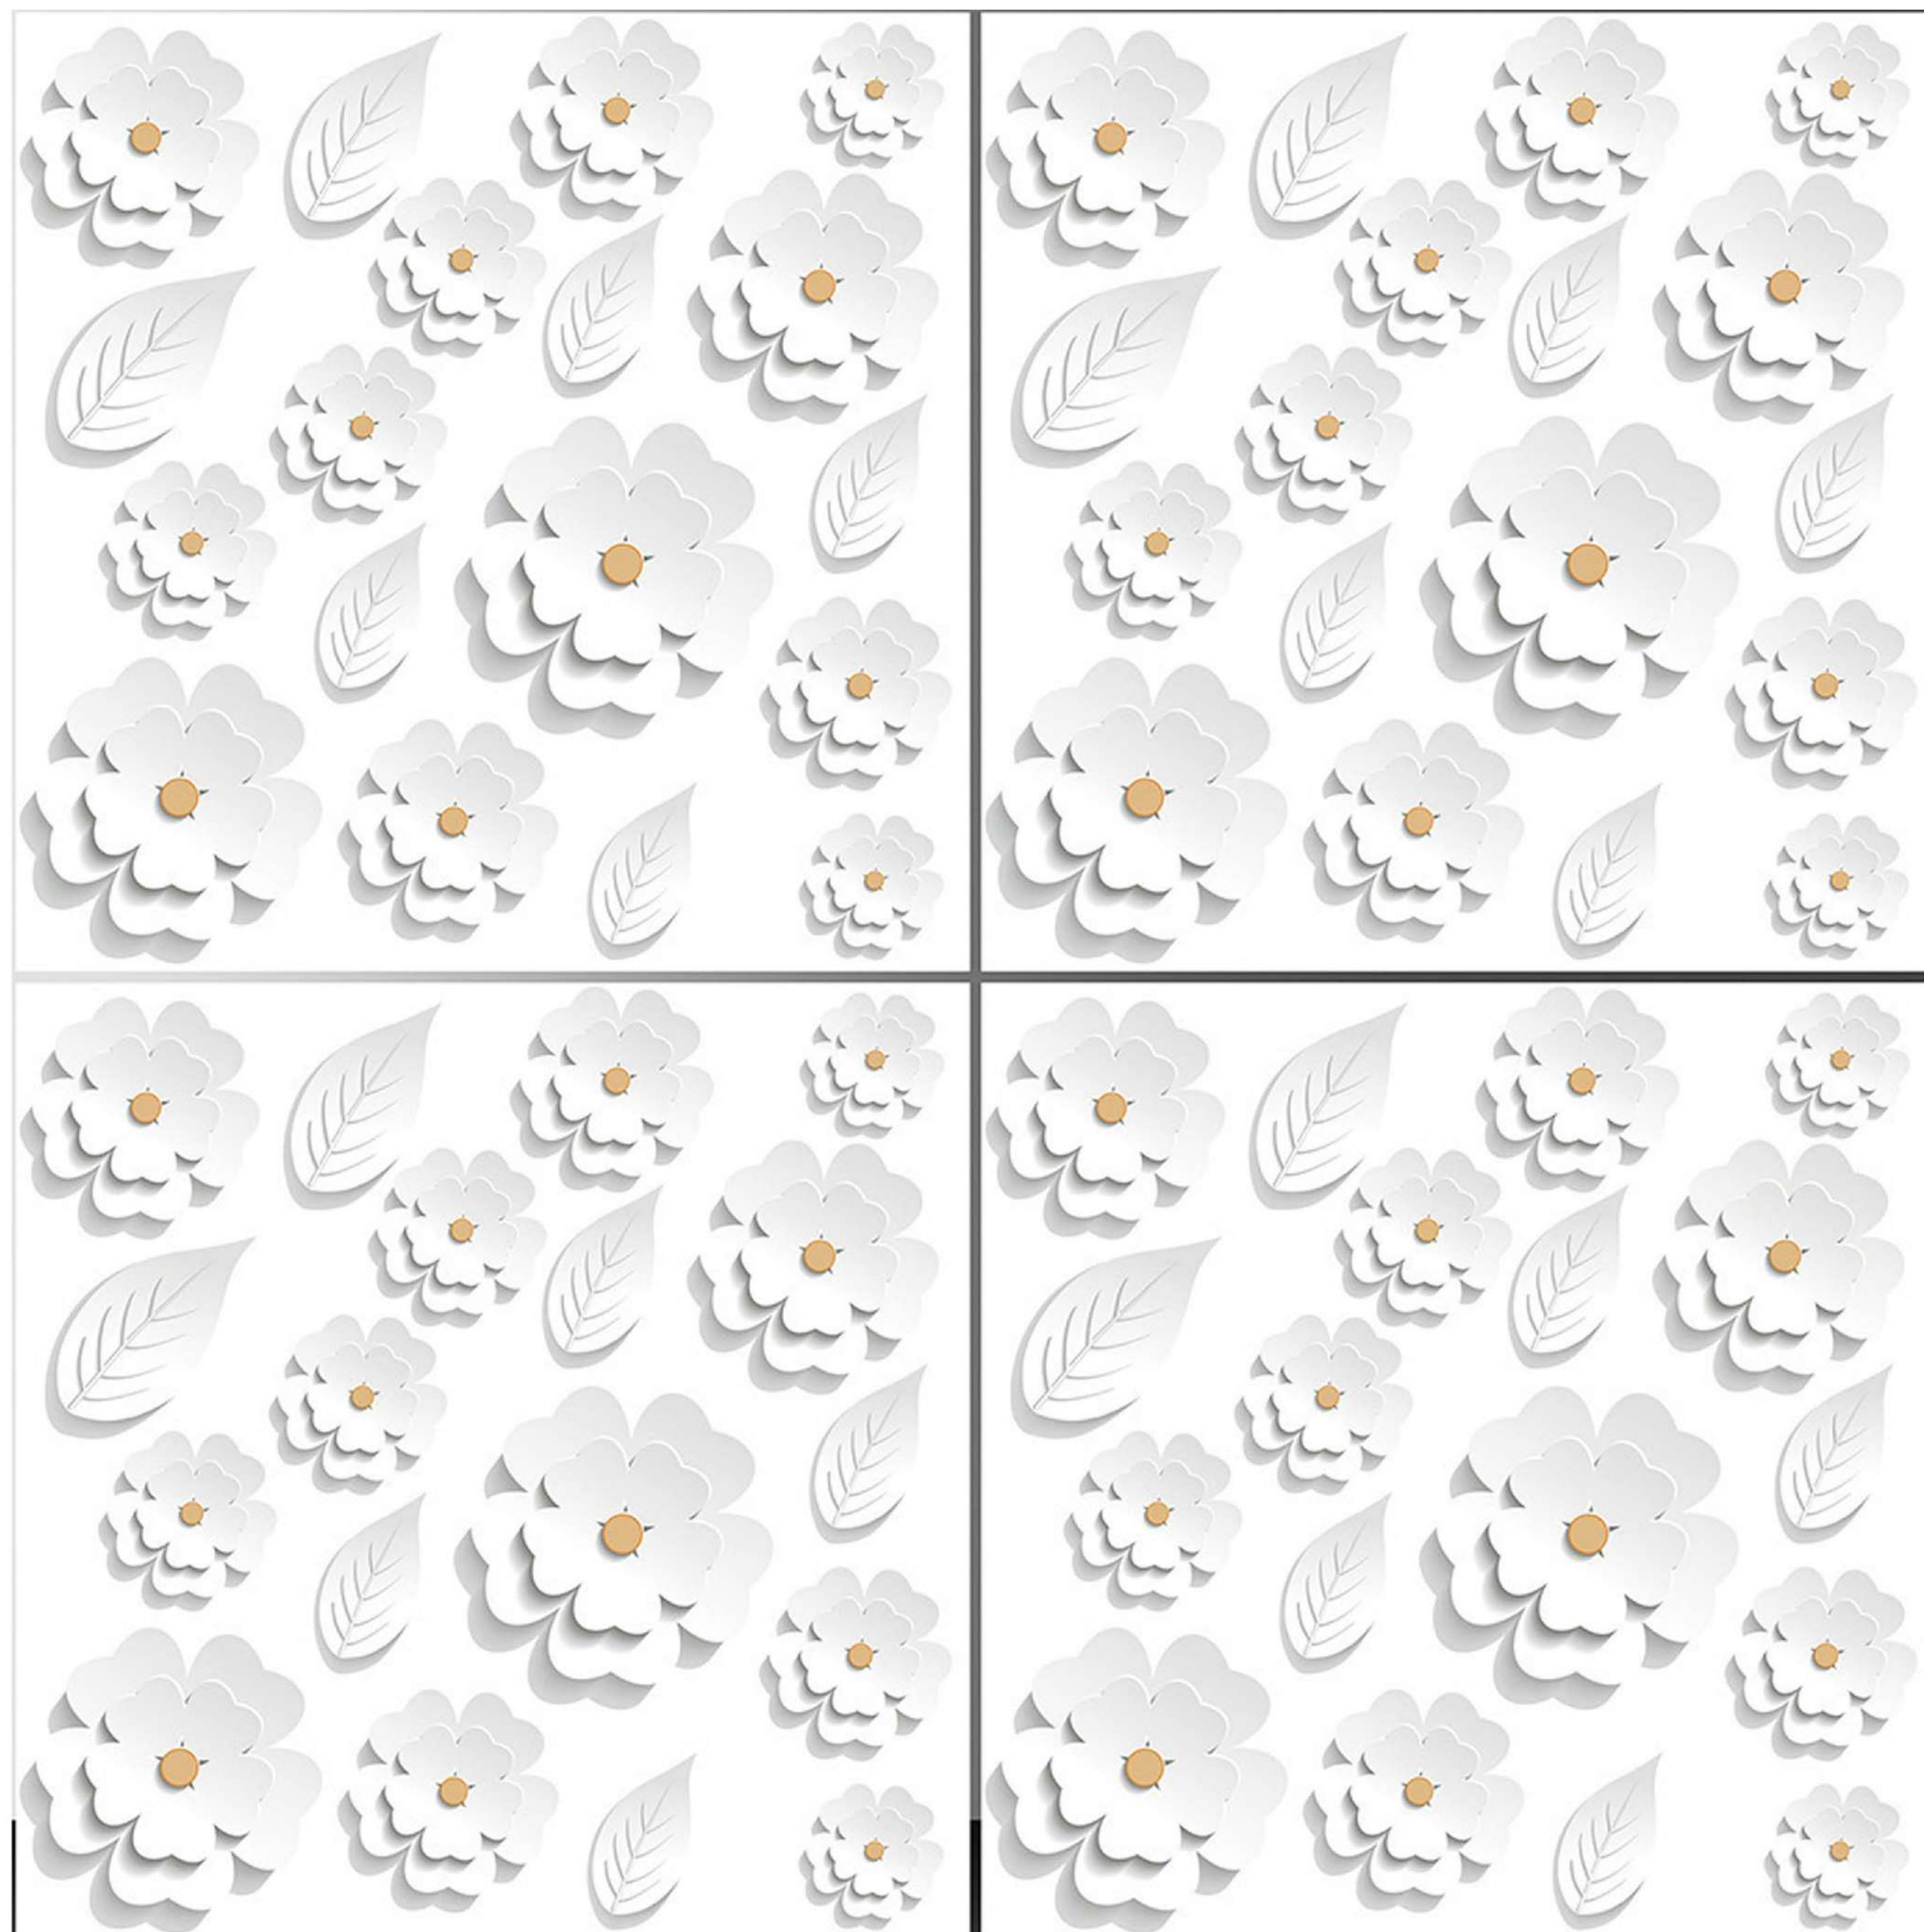



LEADSUN

**MATT
SERIES**

APPLICATIONS



WHITE BODY


**600MMx600MM
PORCELAIN TILES**




11017




11018

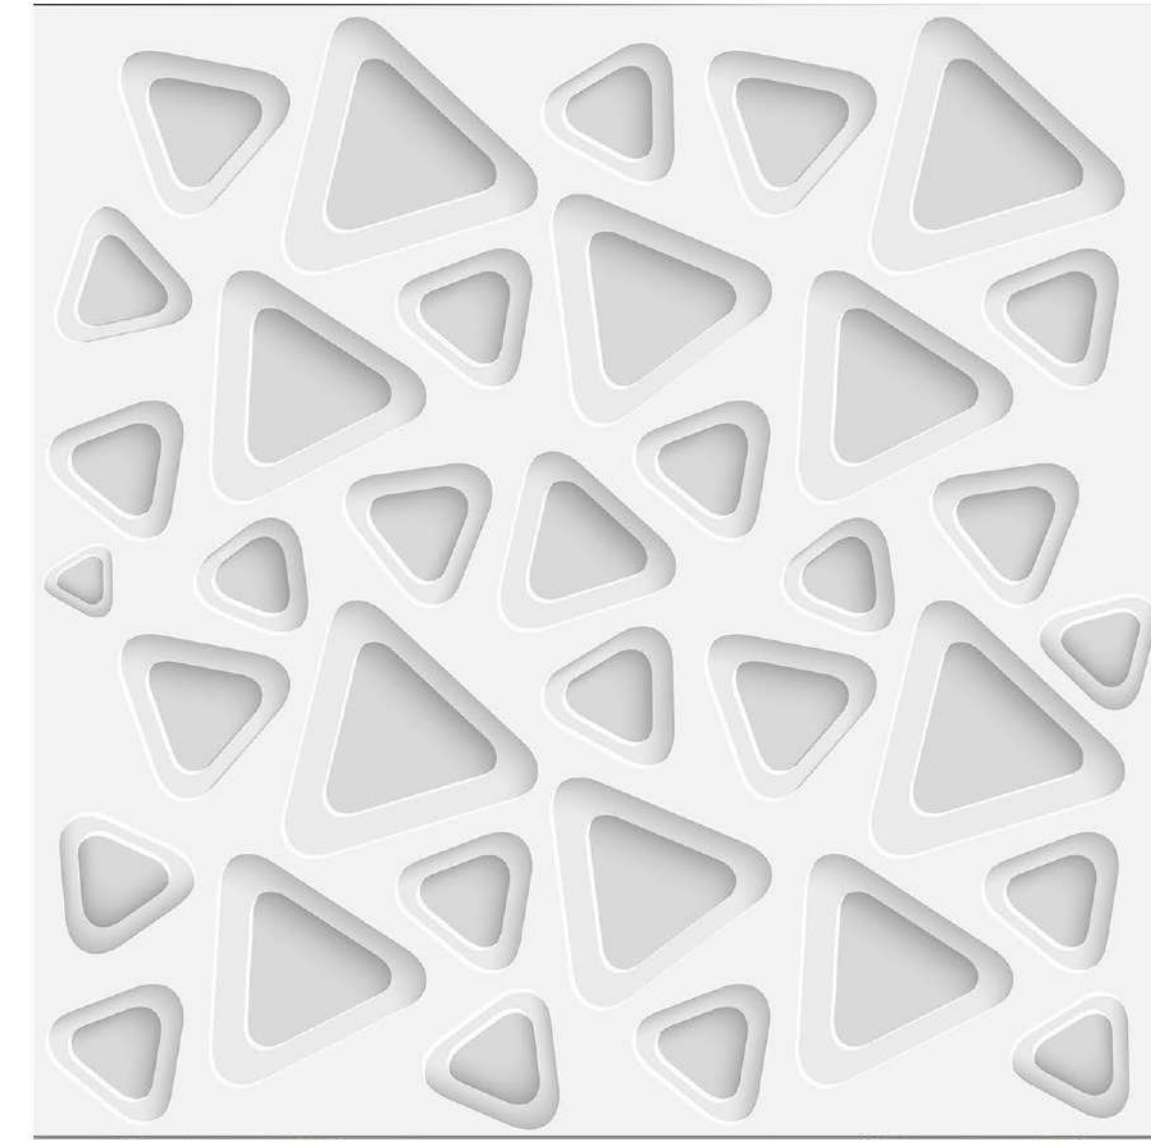

11019

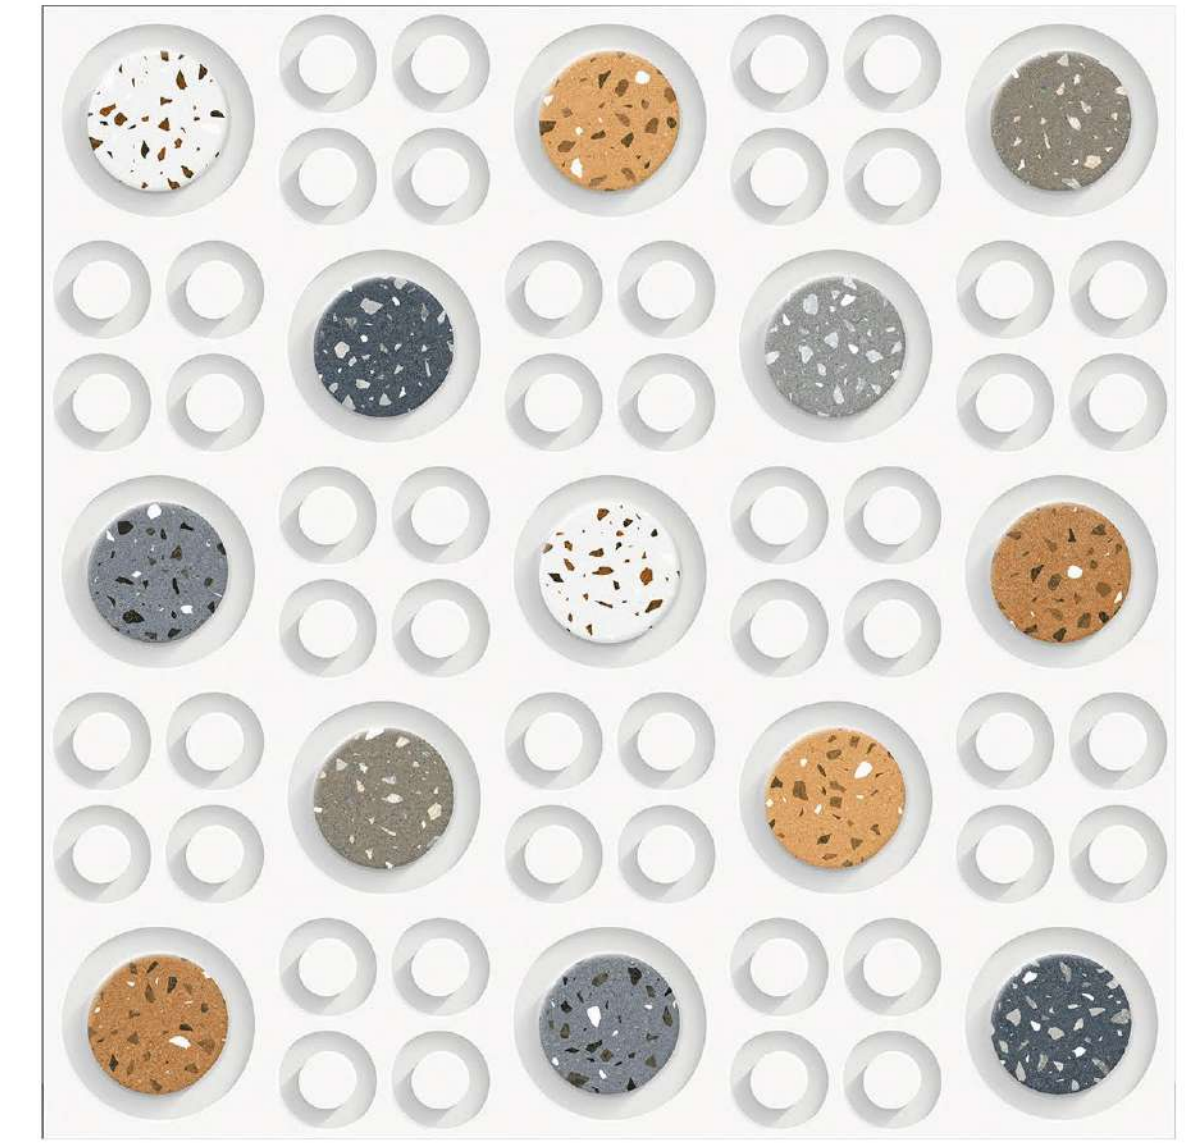

11020

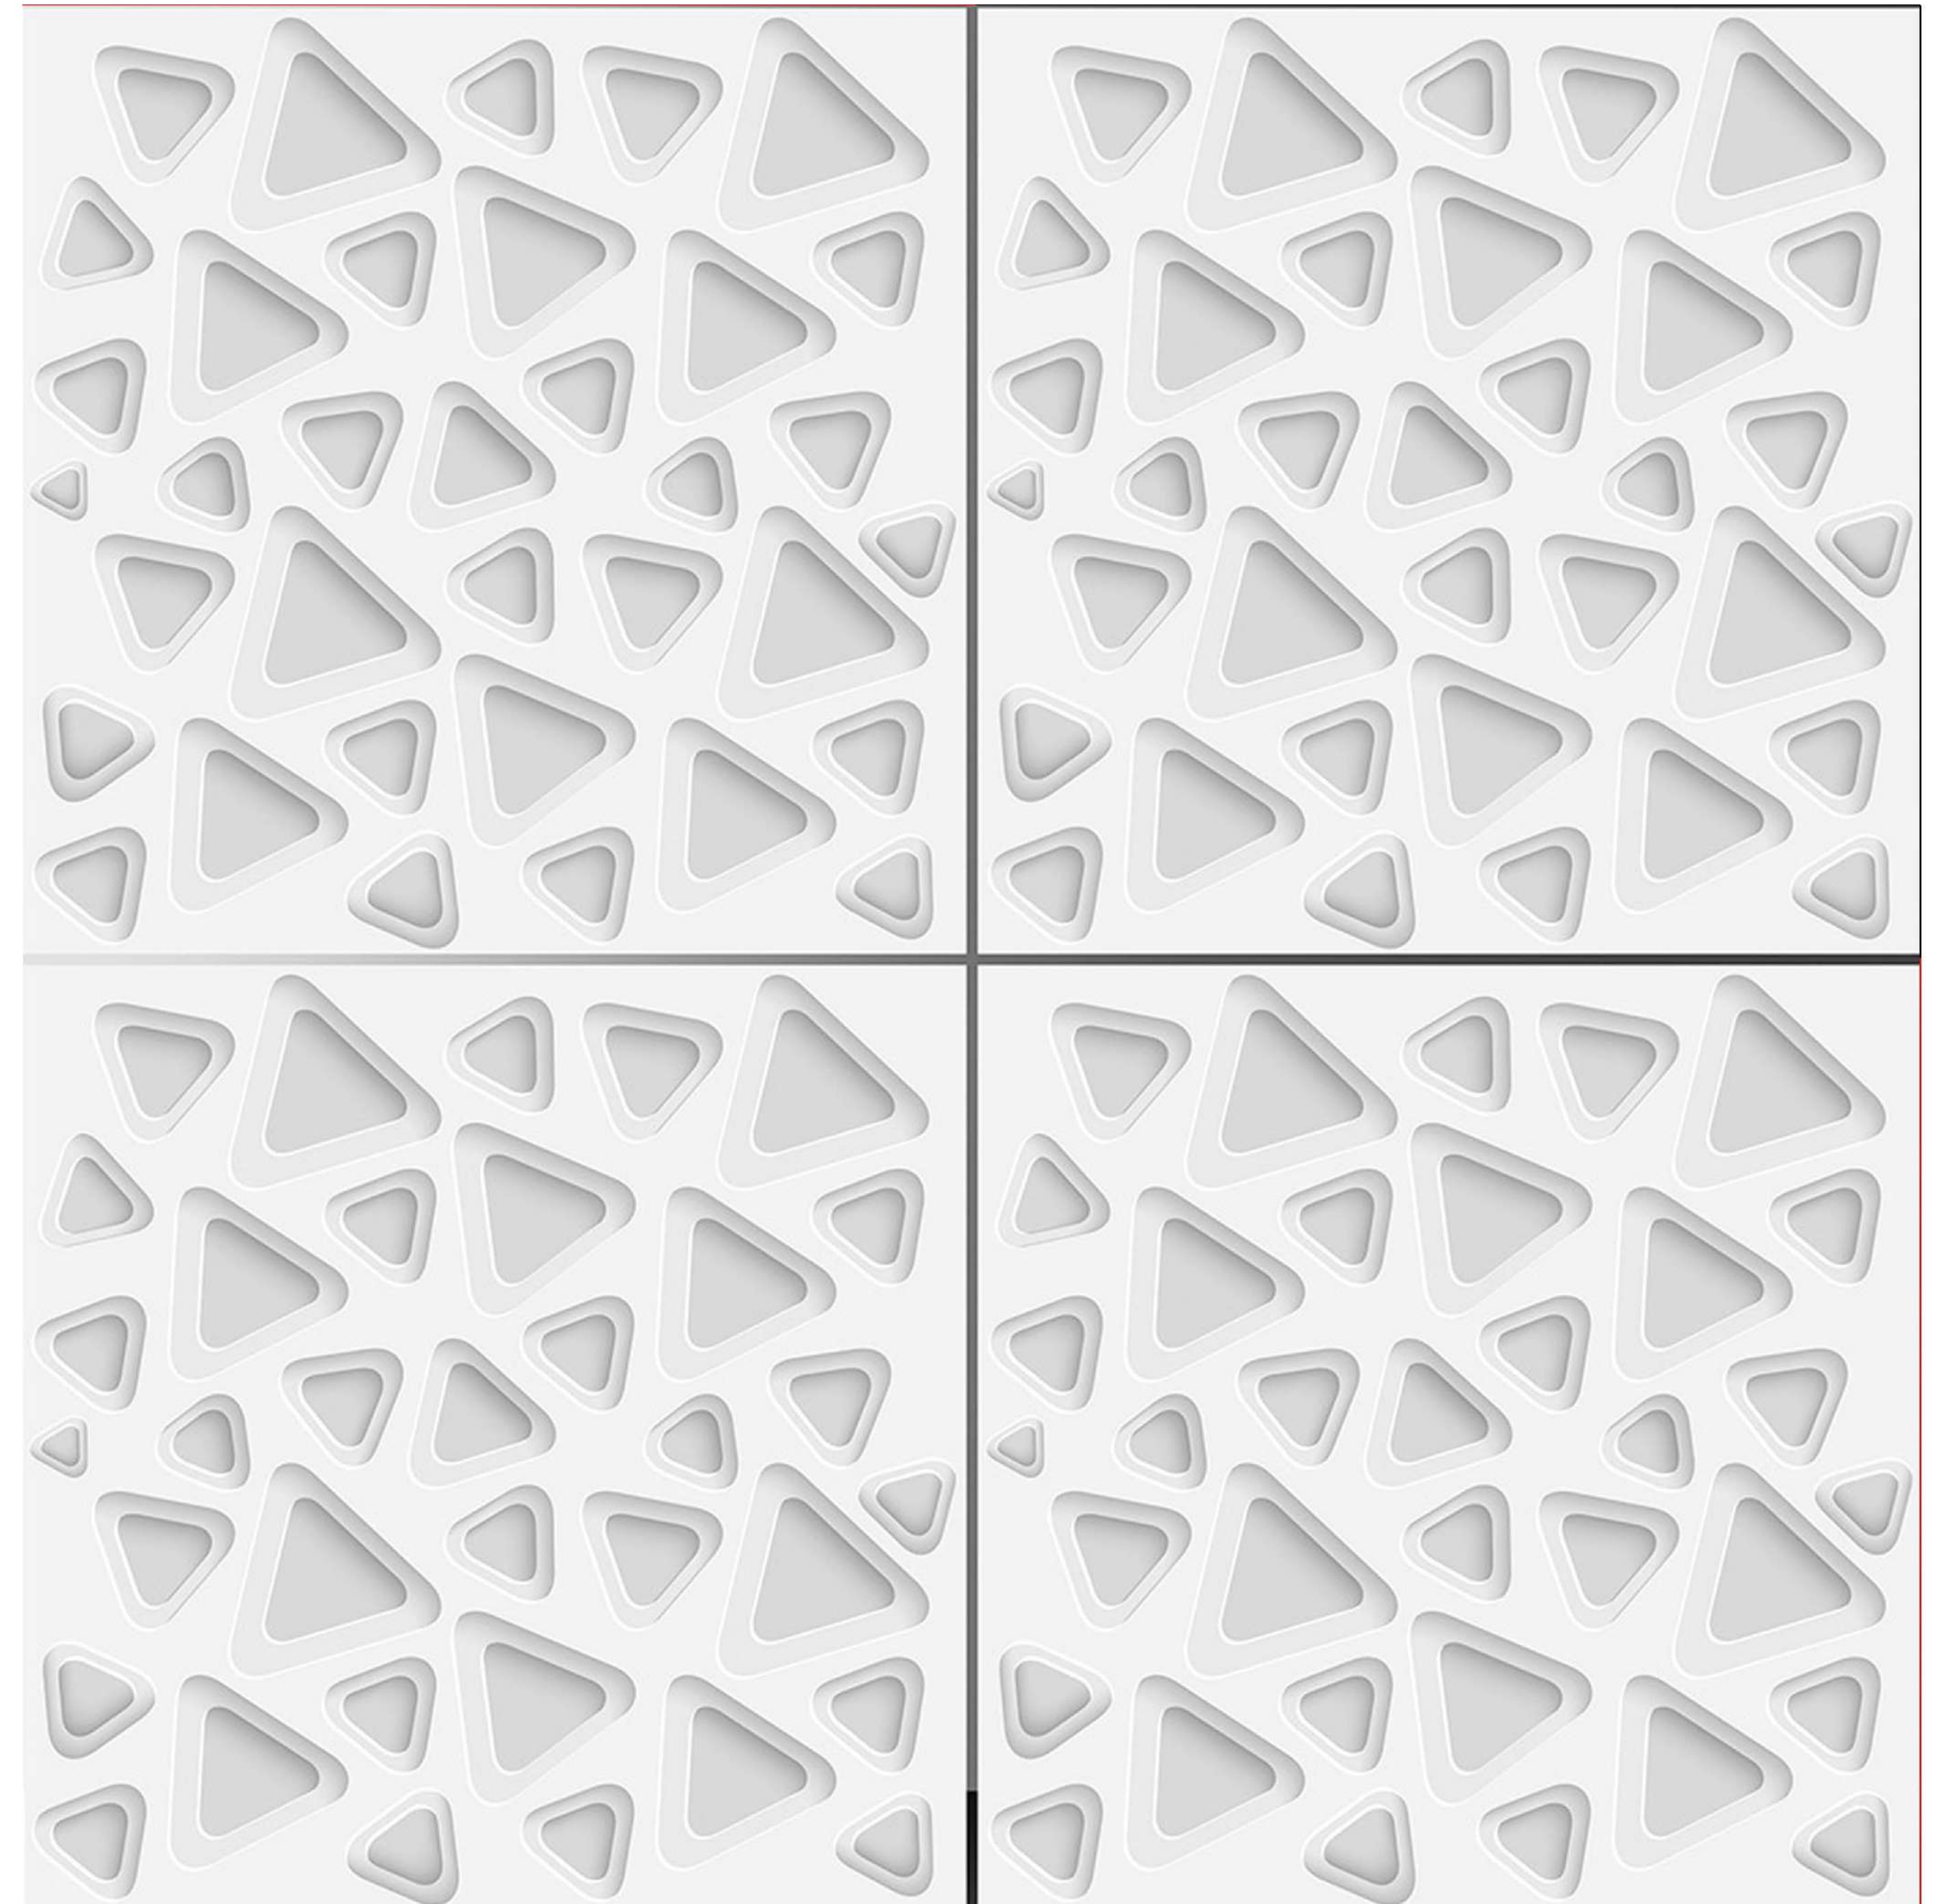



LEADSUN

**MATT
SERIES**

APPLICATIONS



WHITE BODY

**600MMx600MM
PORCELAIN TILES**



11021



11022



11023



11024





LEADSUN

**MATT
SERIES**

APPLICATIONS




WHITE BODY


**600MMx600MM
PORCELAIN TILES**



11025

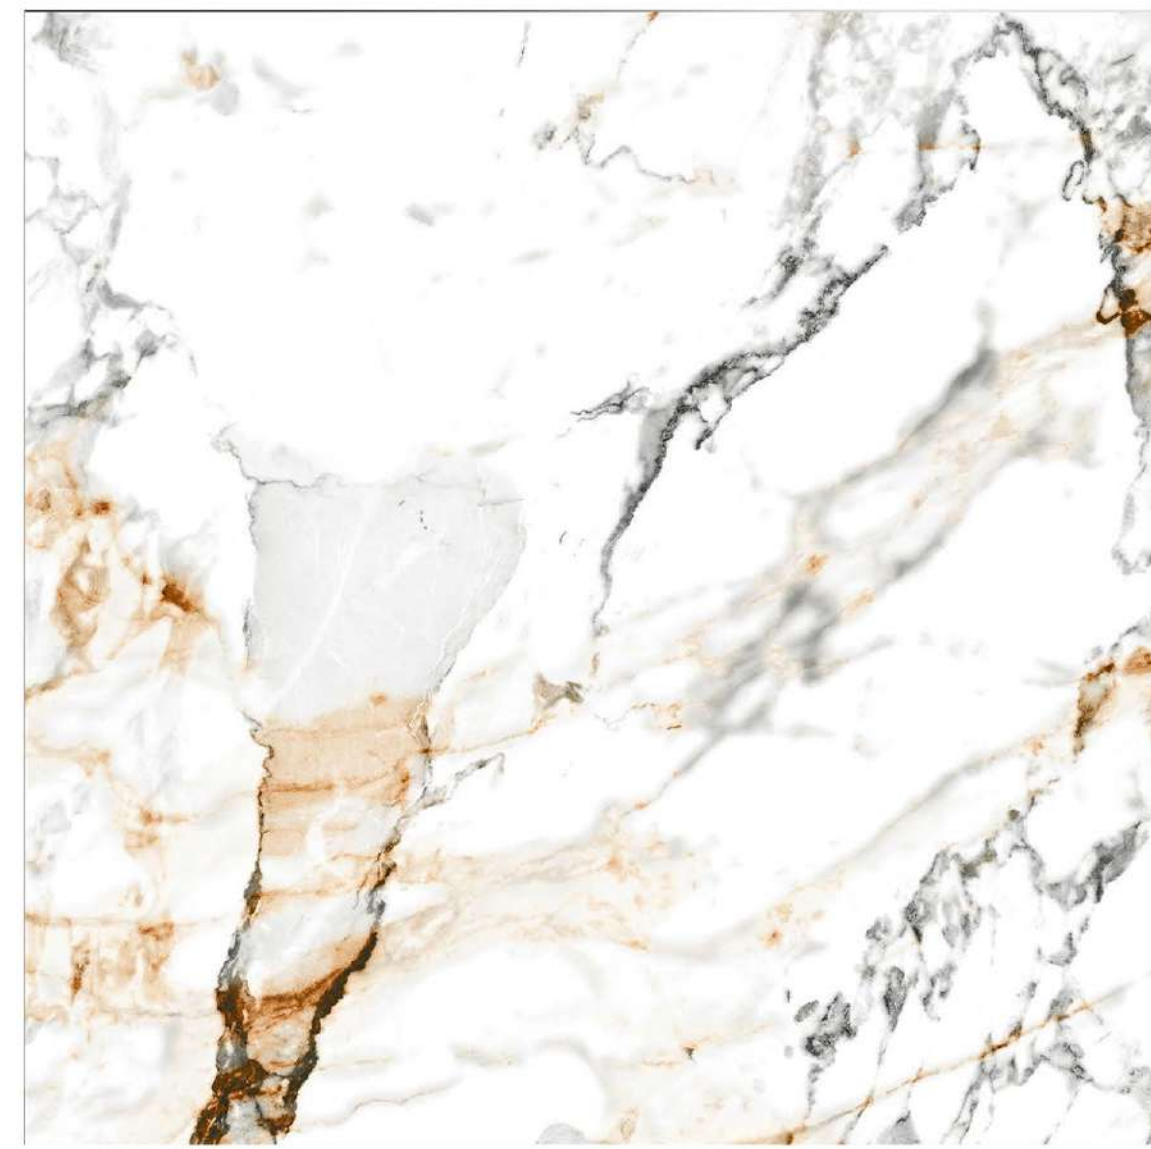


11026

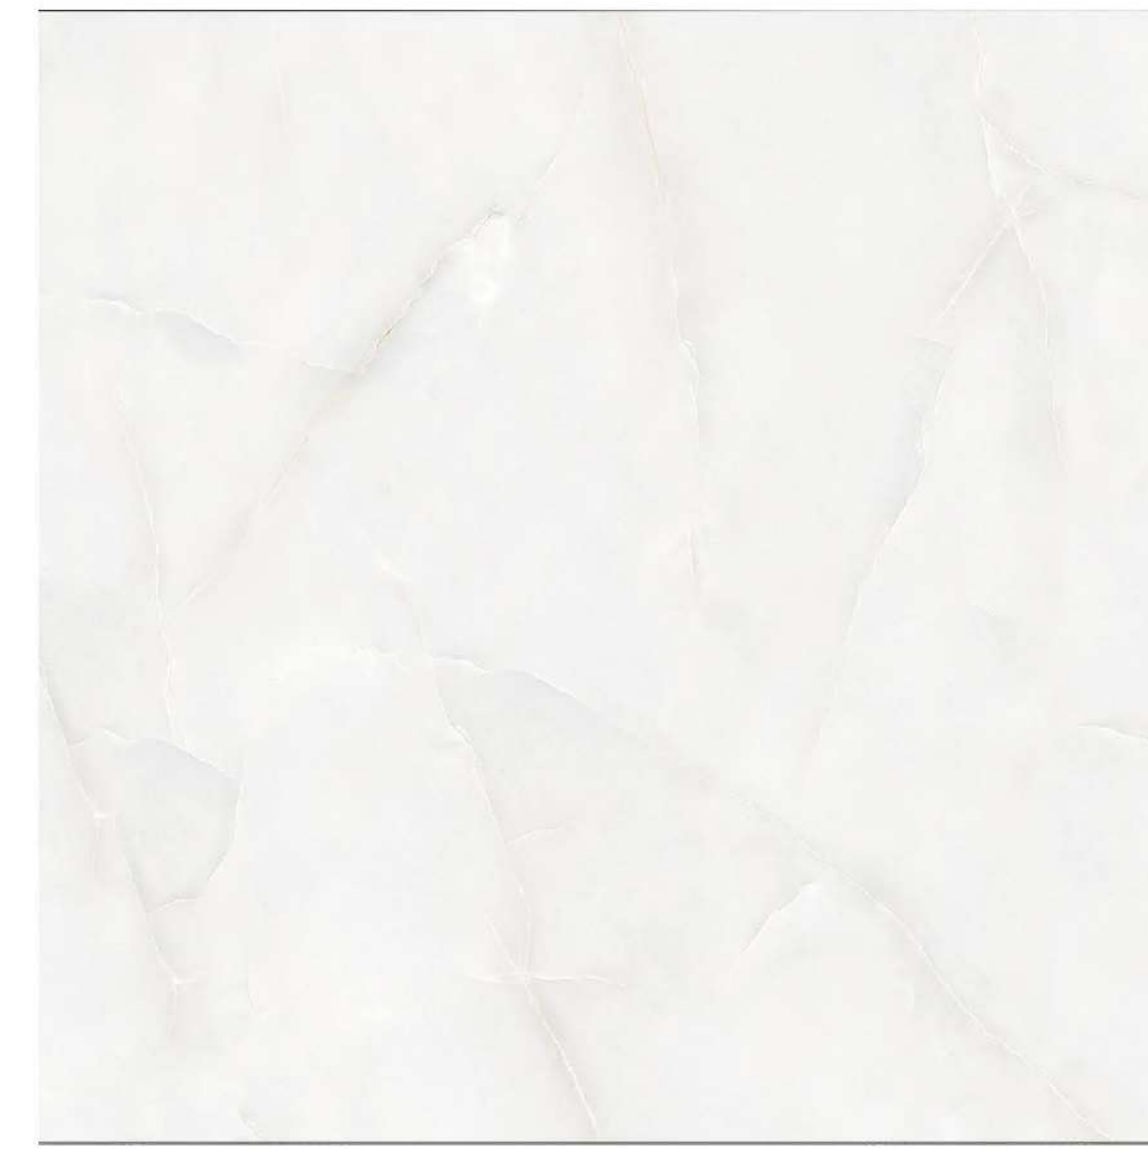

11027



11028

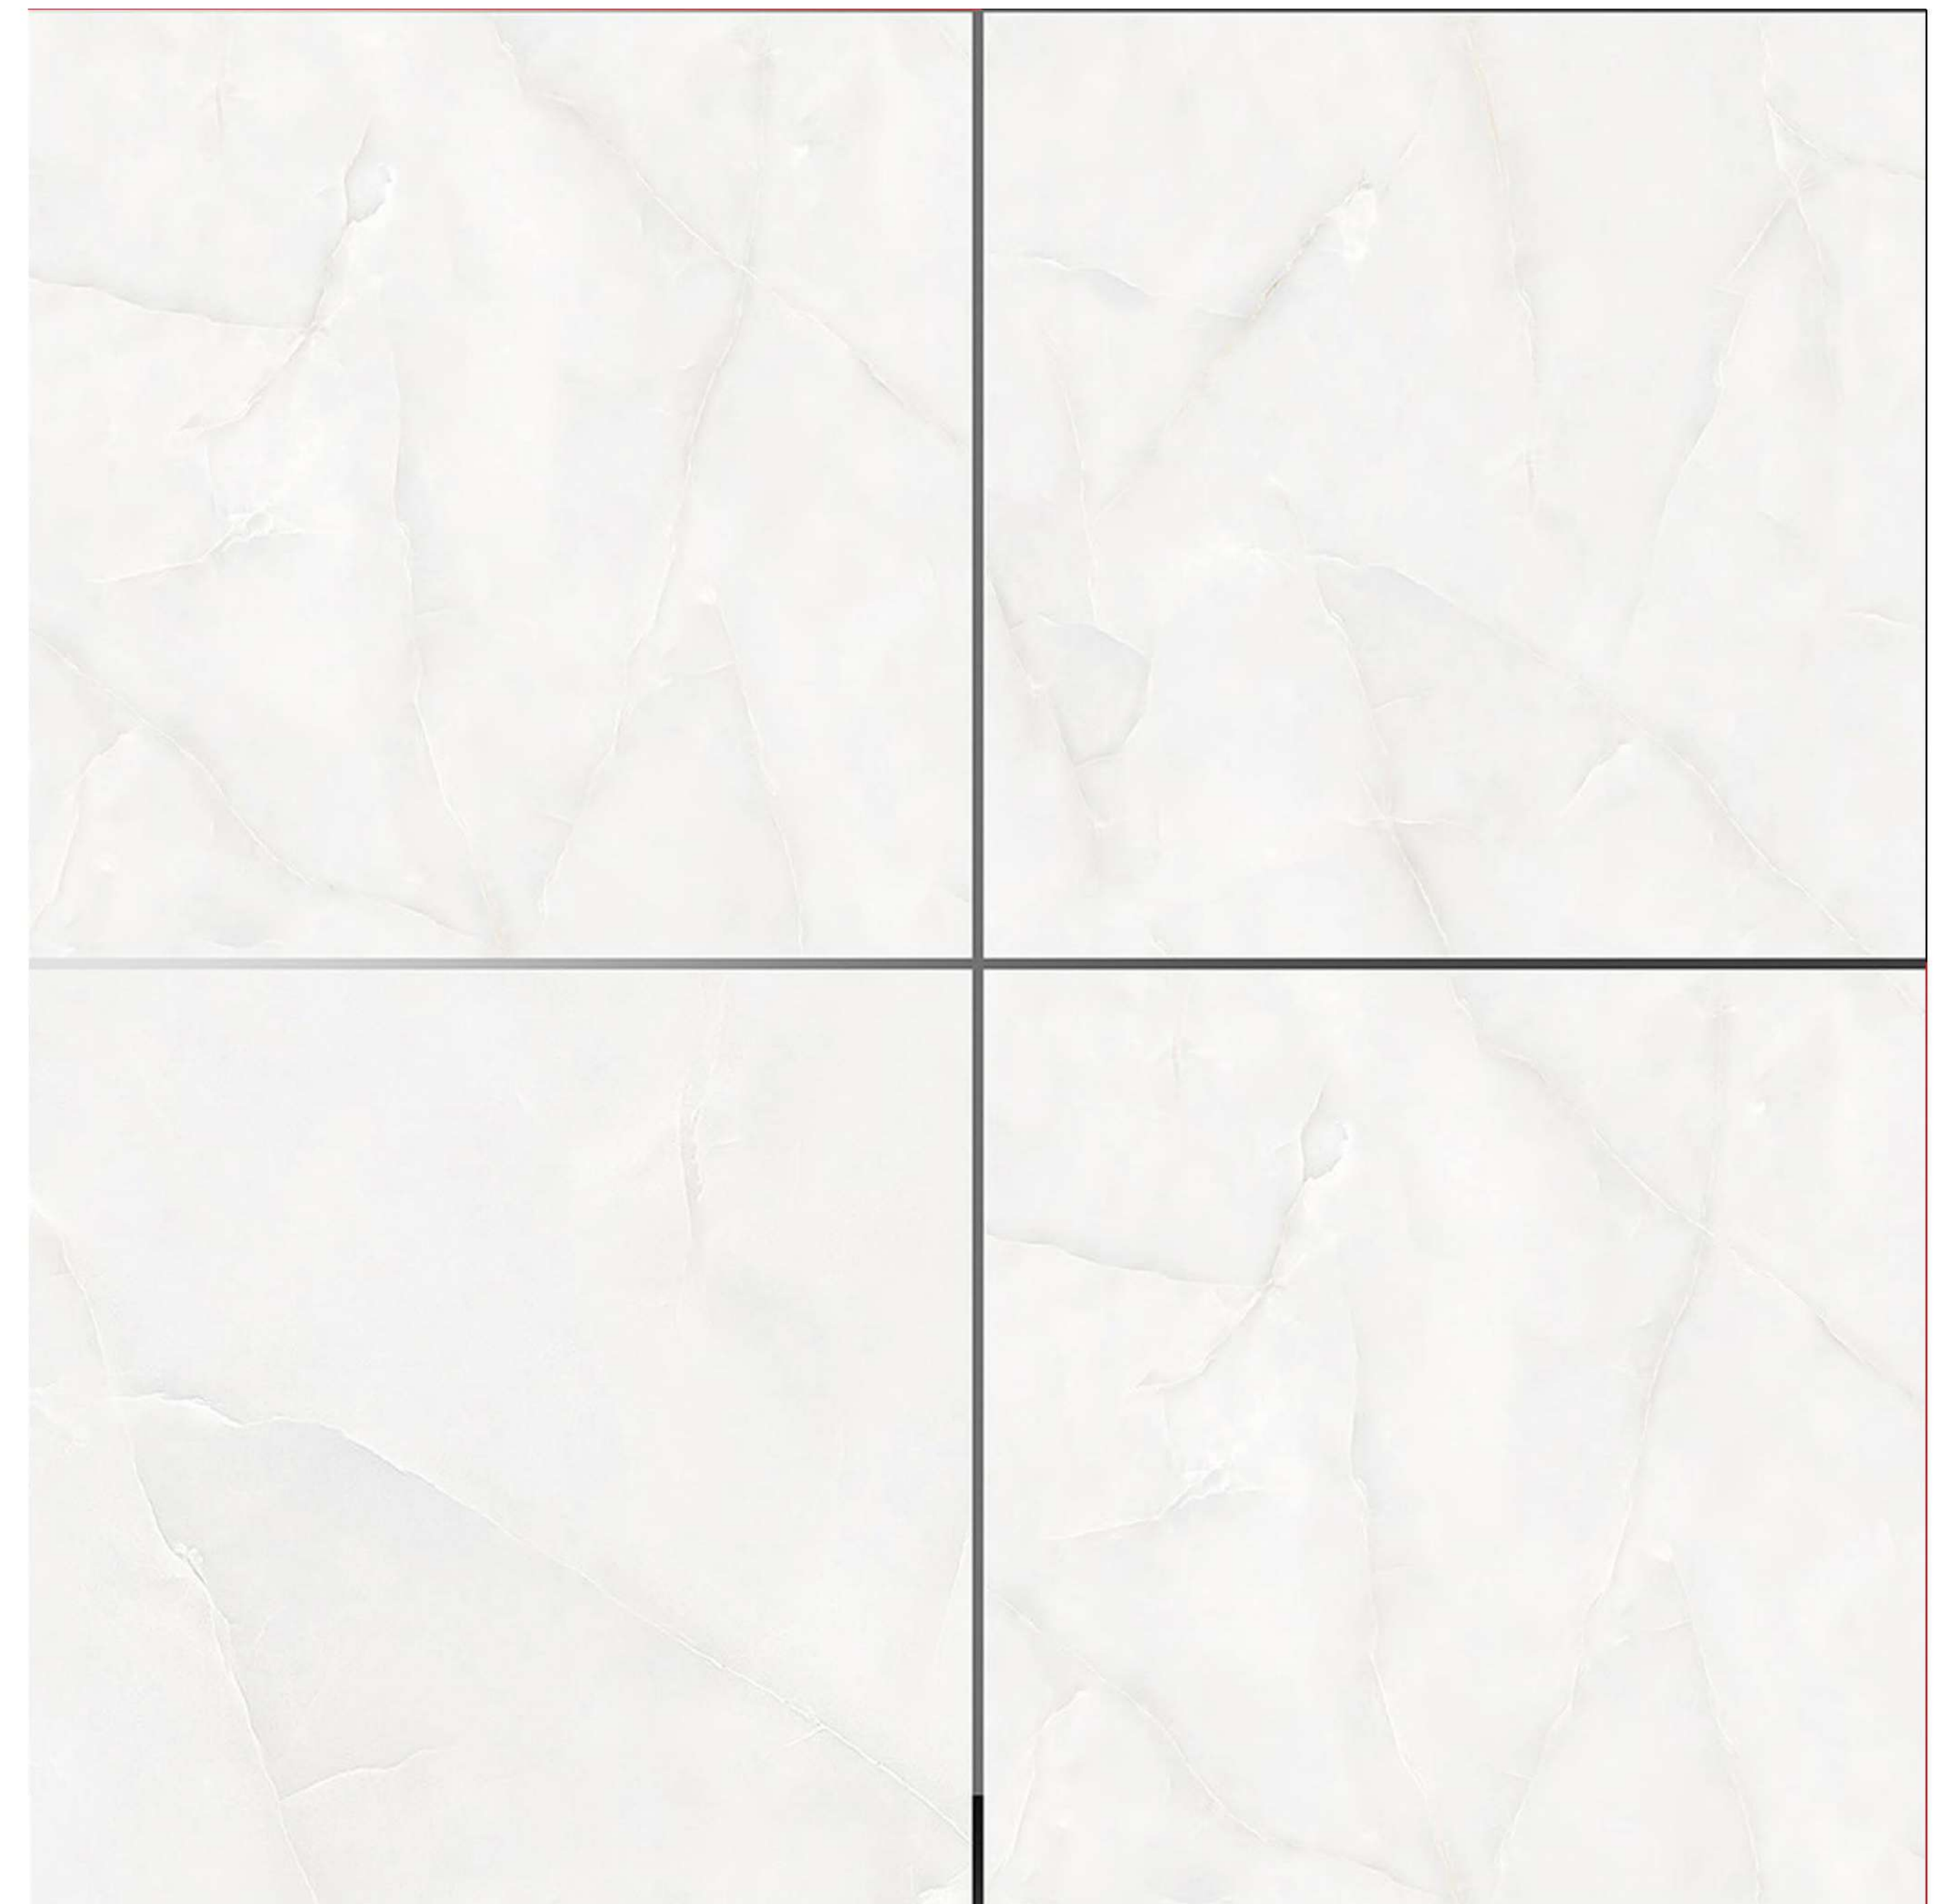



LEADSUN

**MATT
SERIES**

APPLICATIONS




WHITE BODY

**600MMx600MM
PORCELAIN TILES**



11029

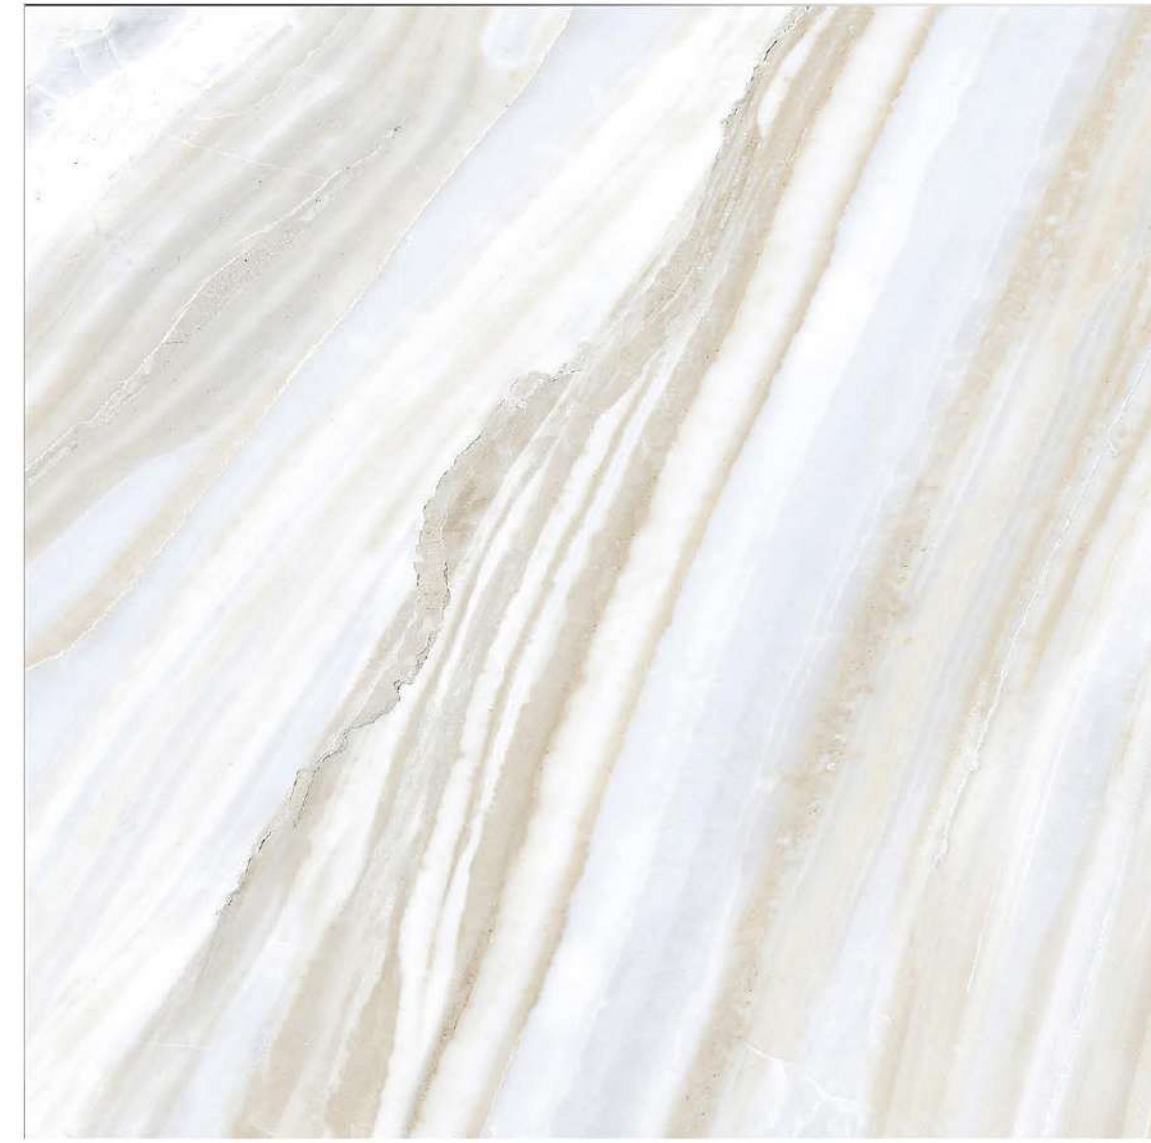


11030



11031



11032

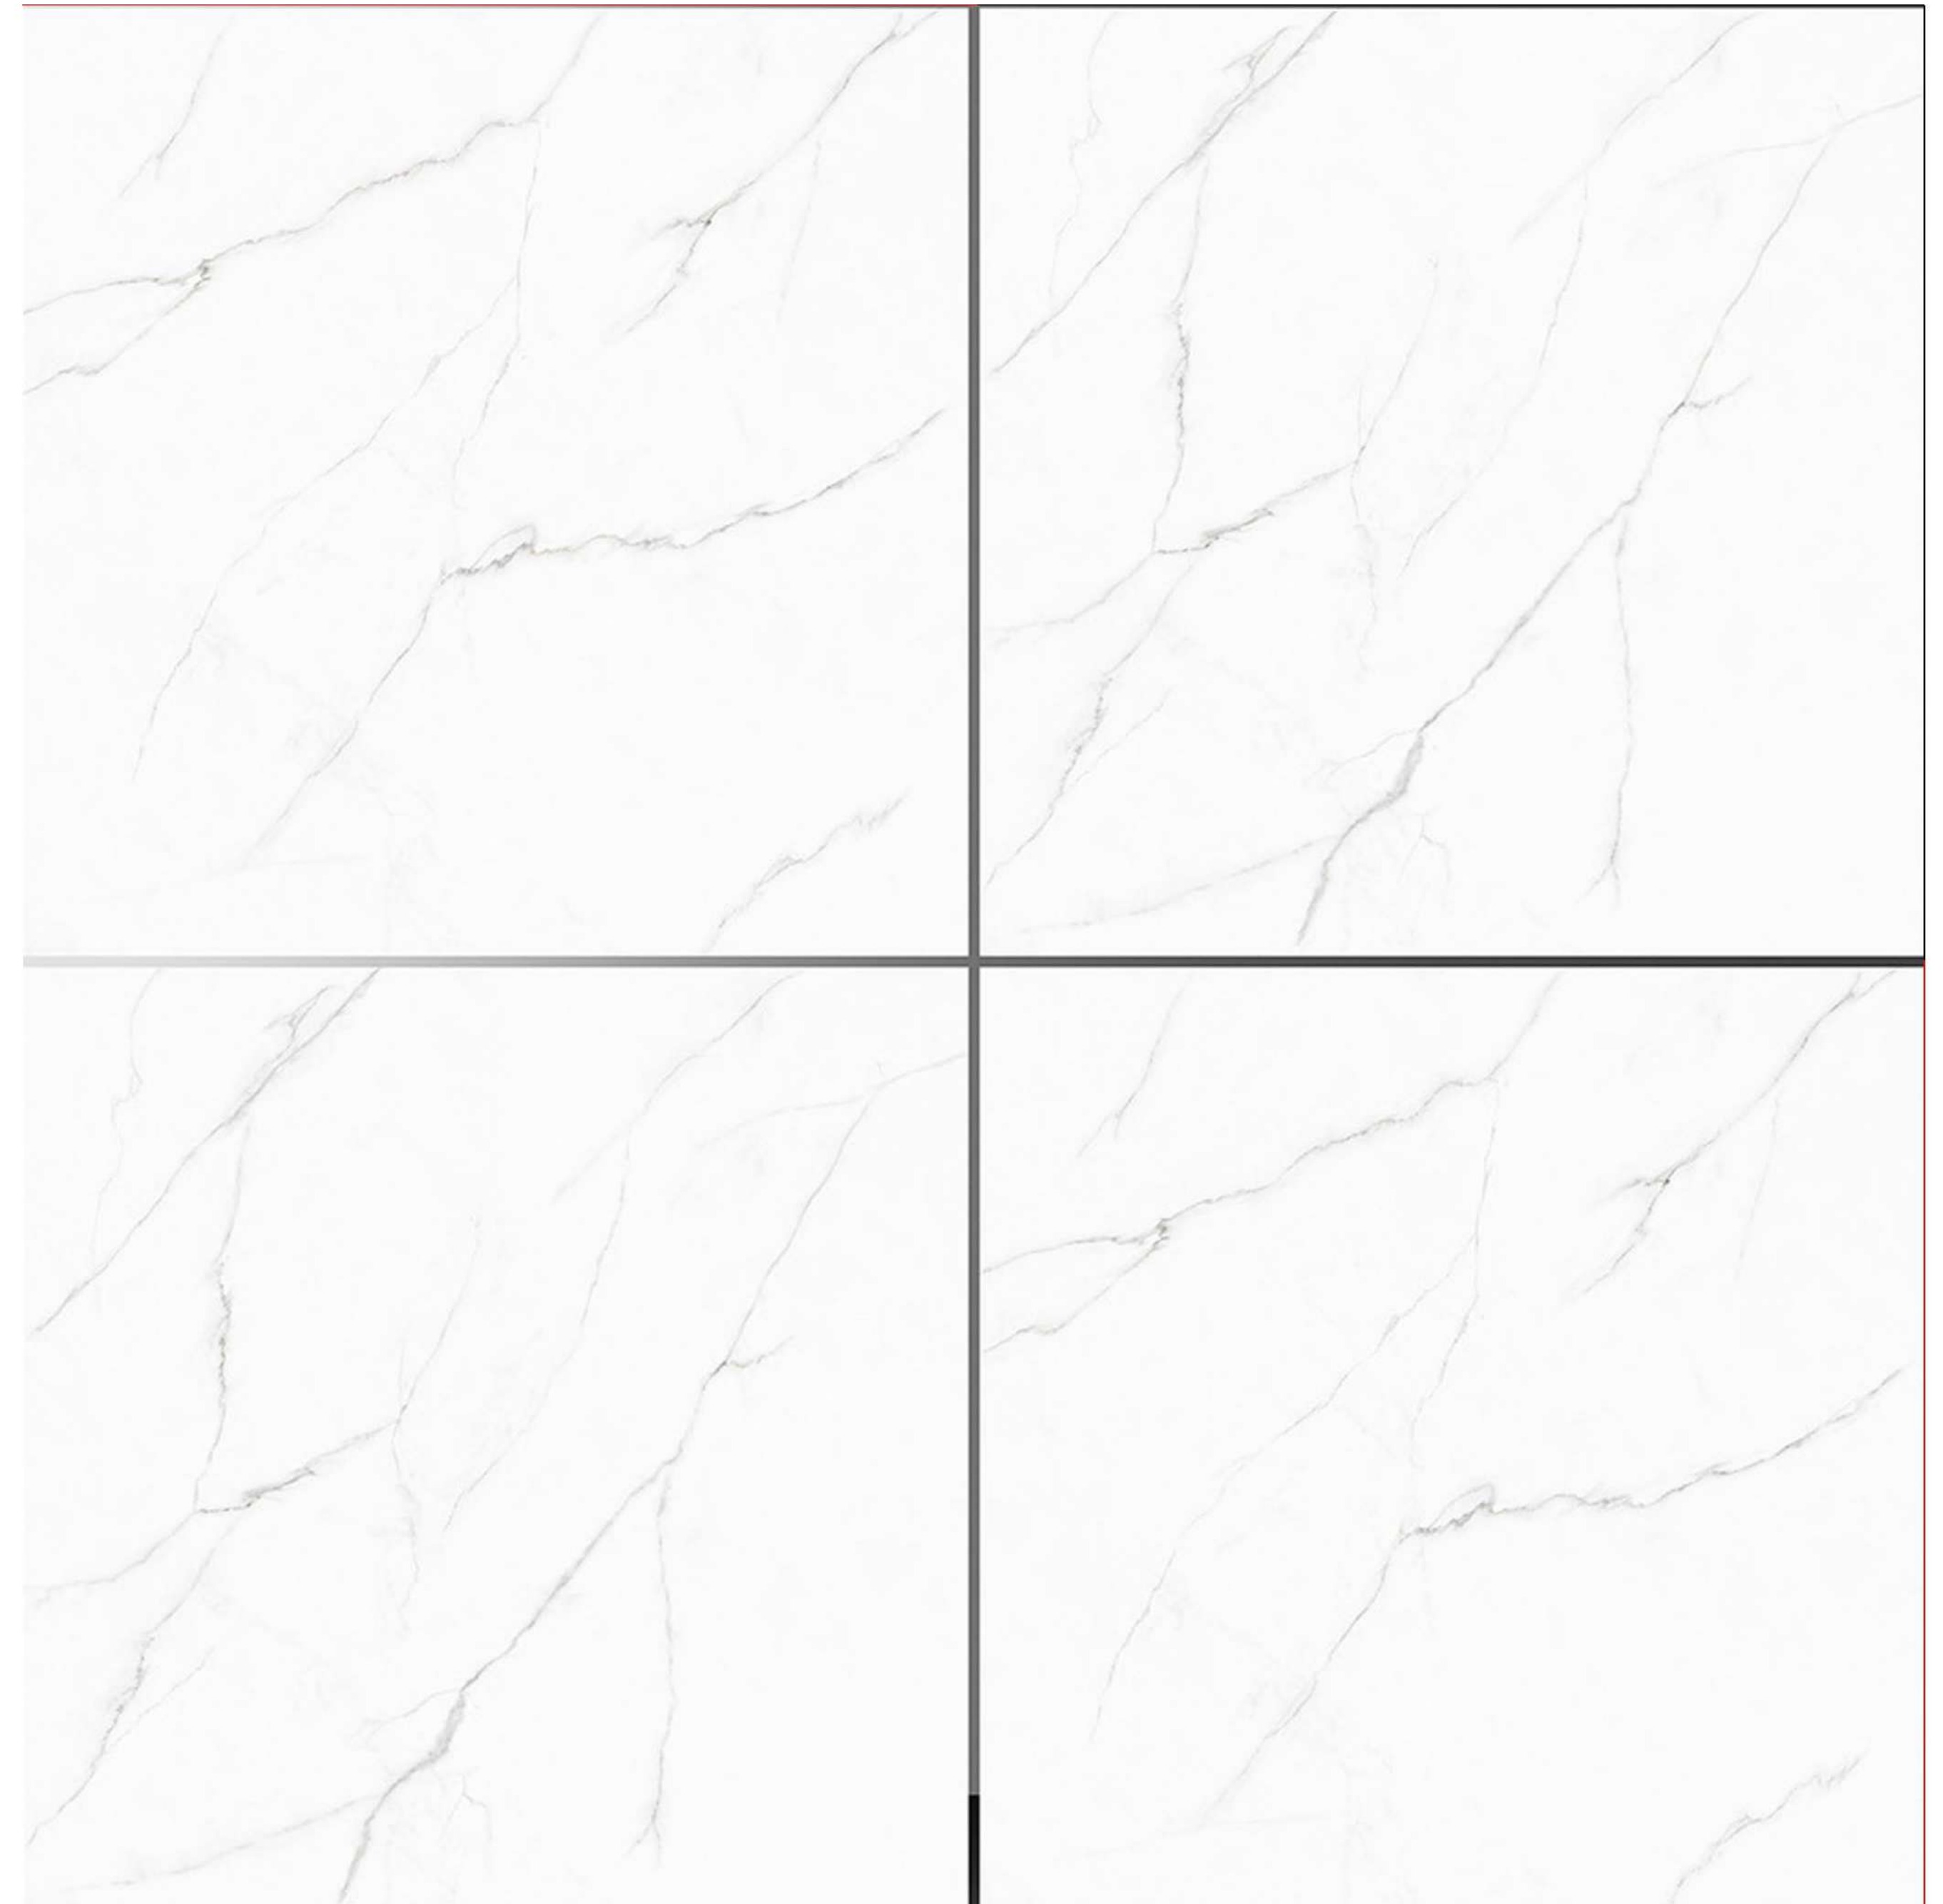



LEADSUN


**MATT
SERIES**

APPLICATIONS




WHITE BODY

**600MMx600MM
PORCELAIN TILES**

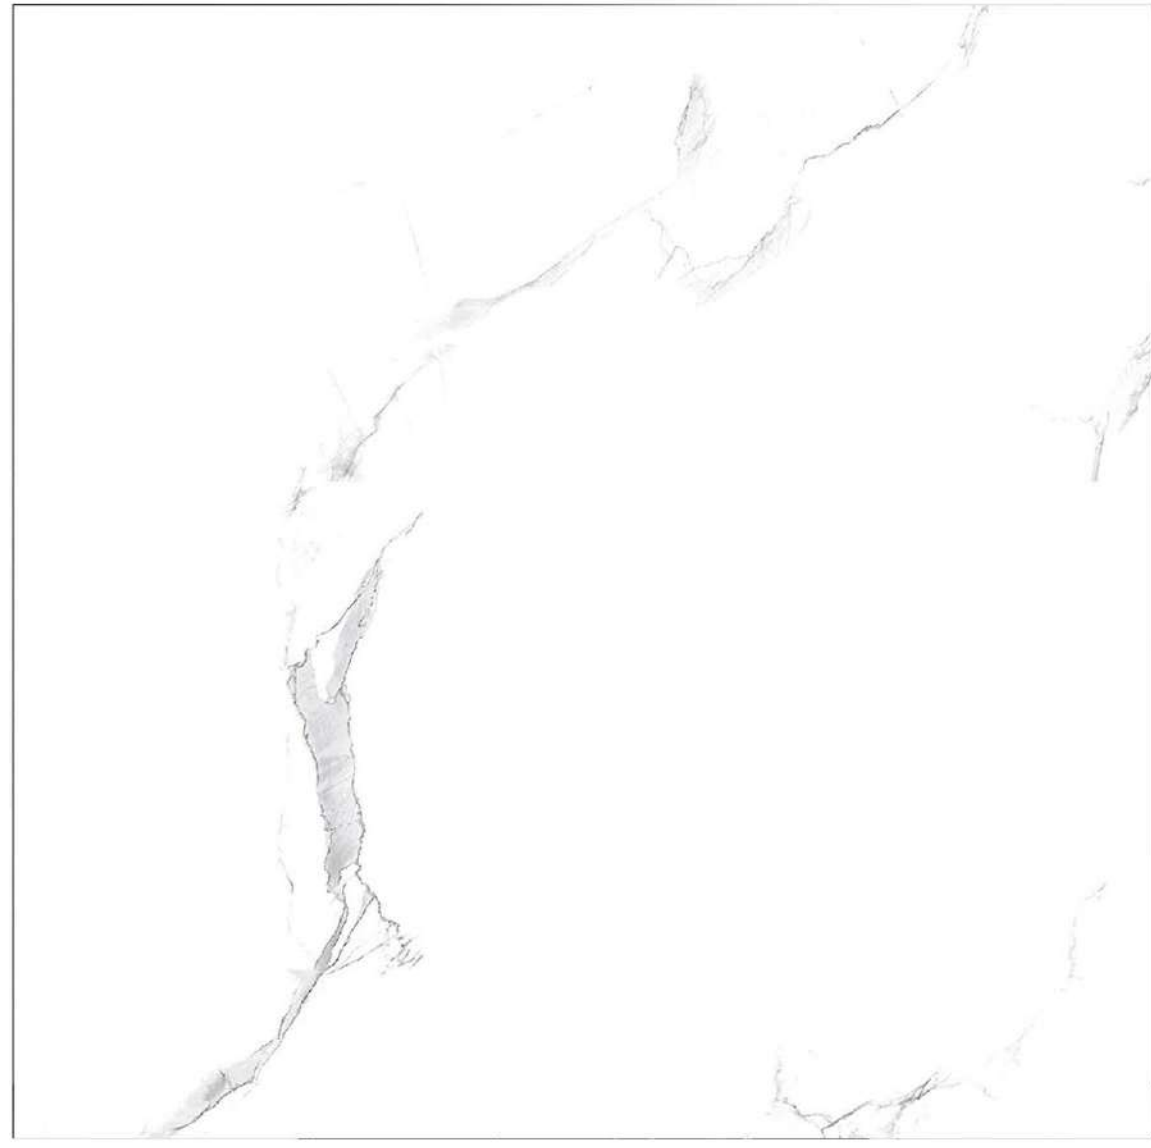

11033

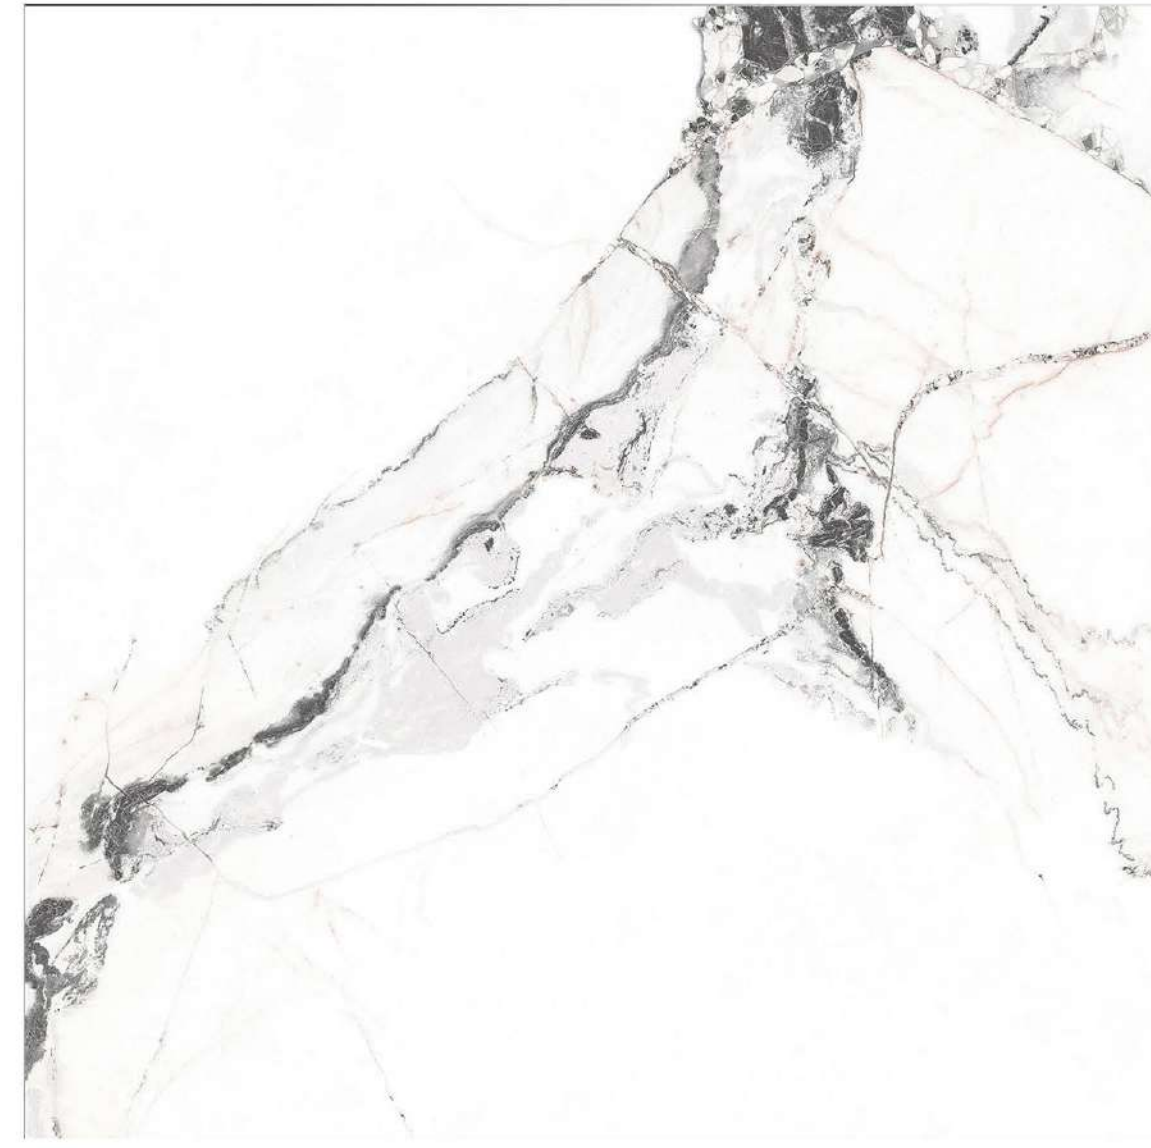


11034



11035



11036

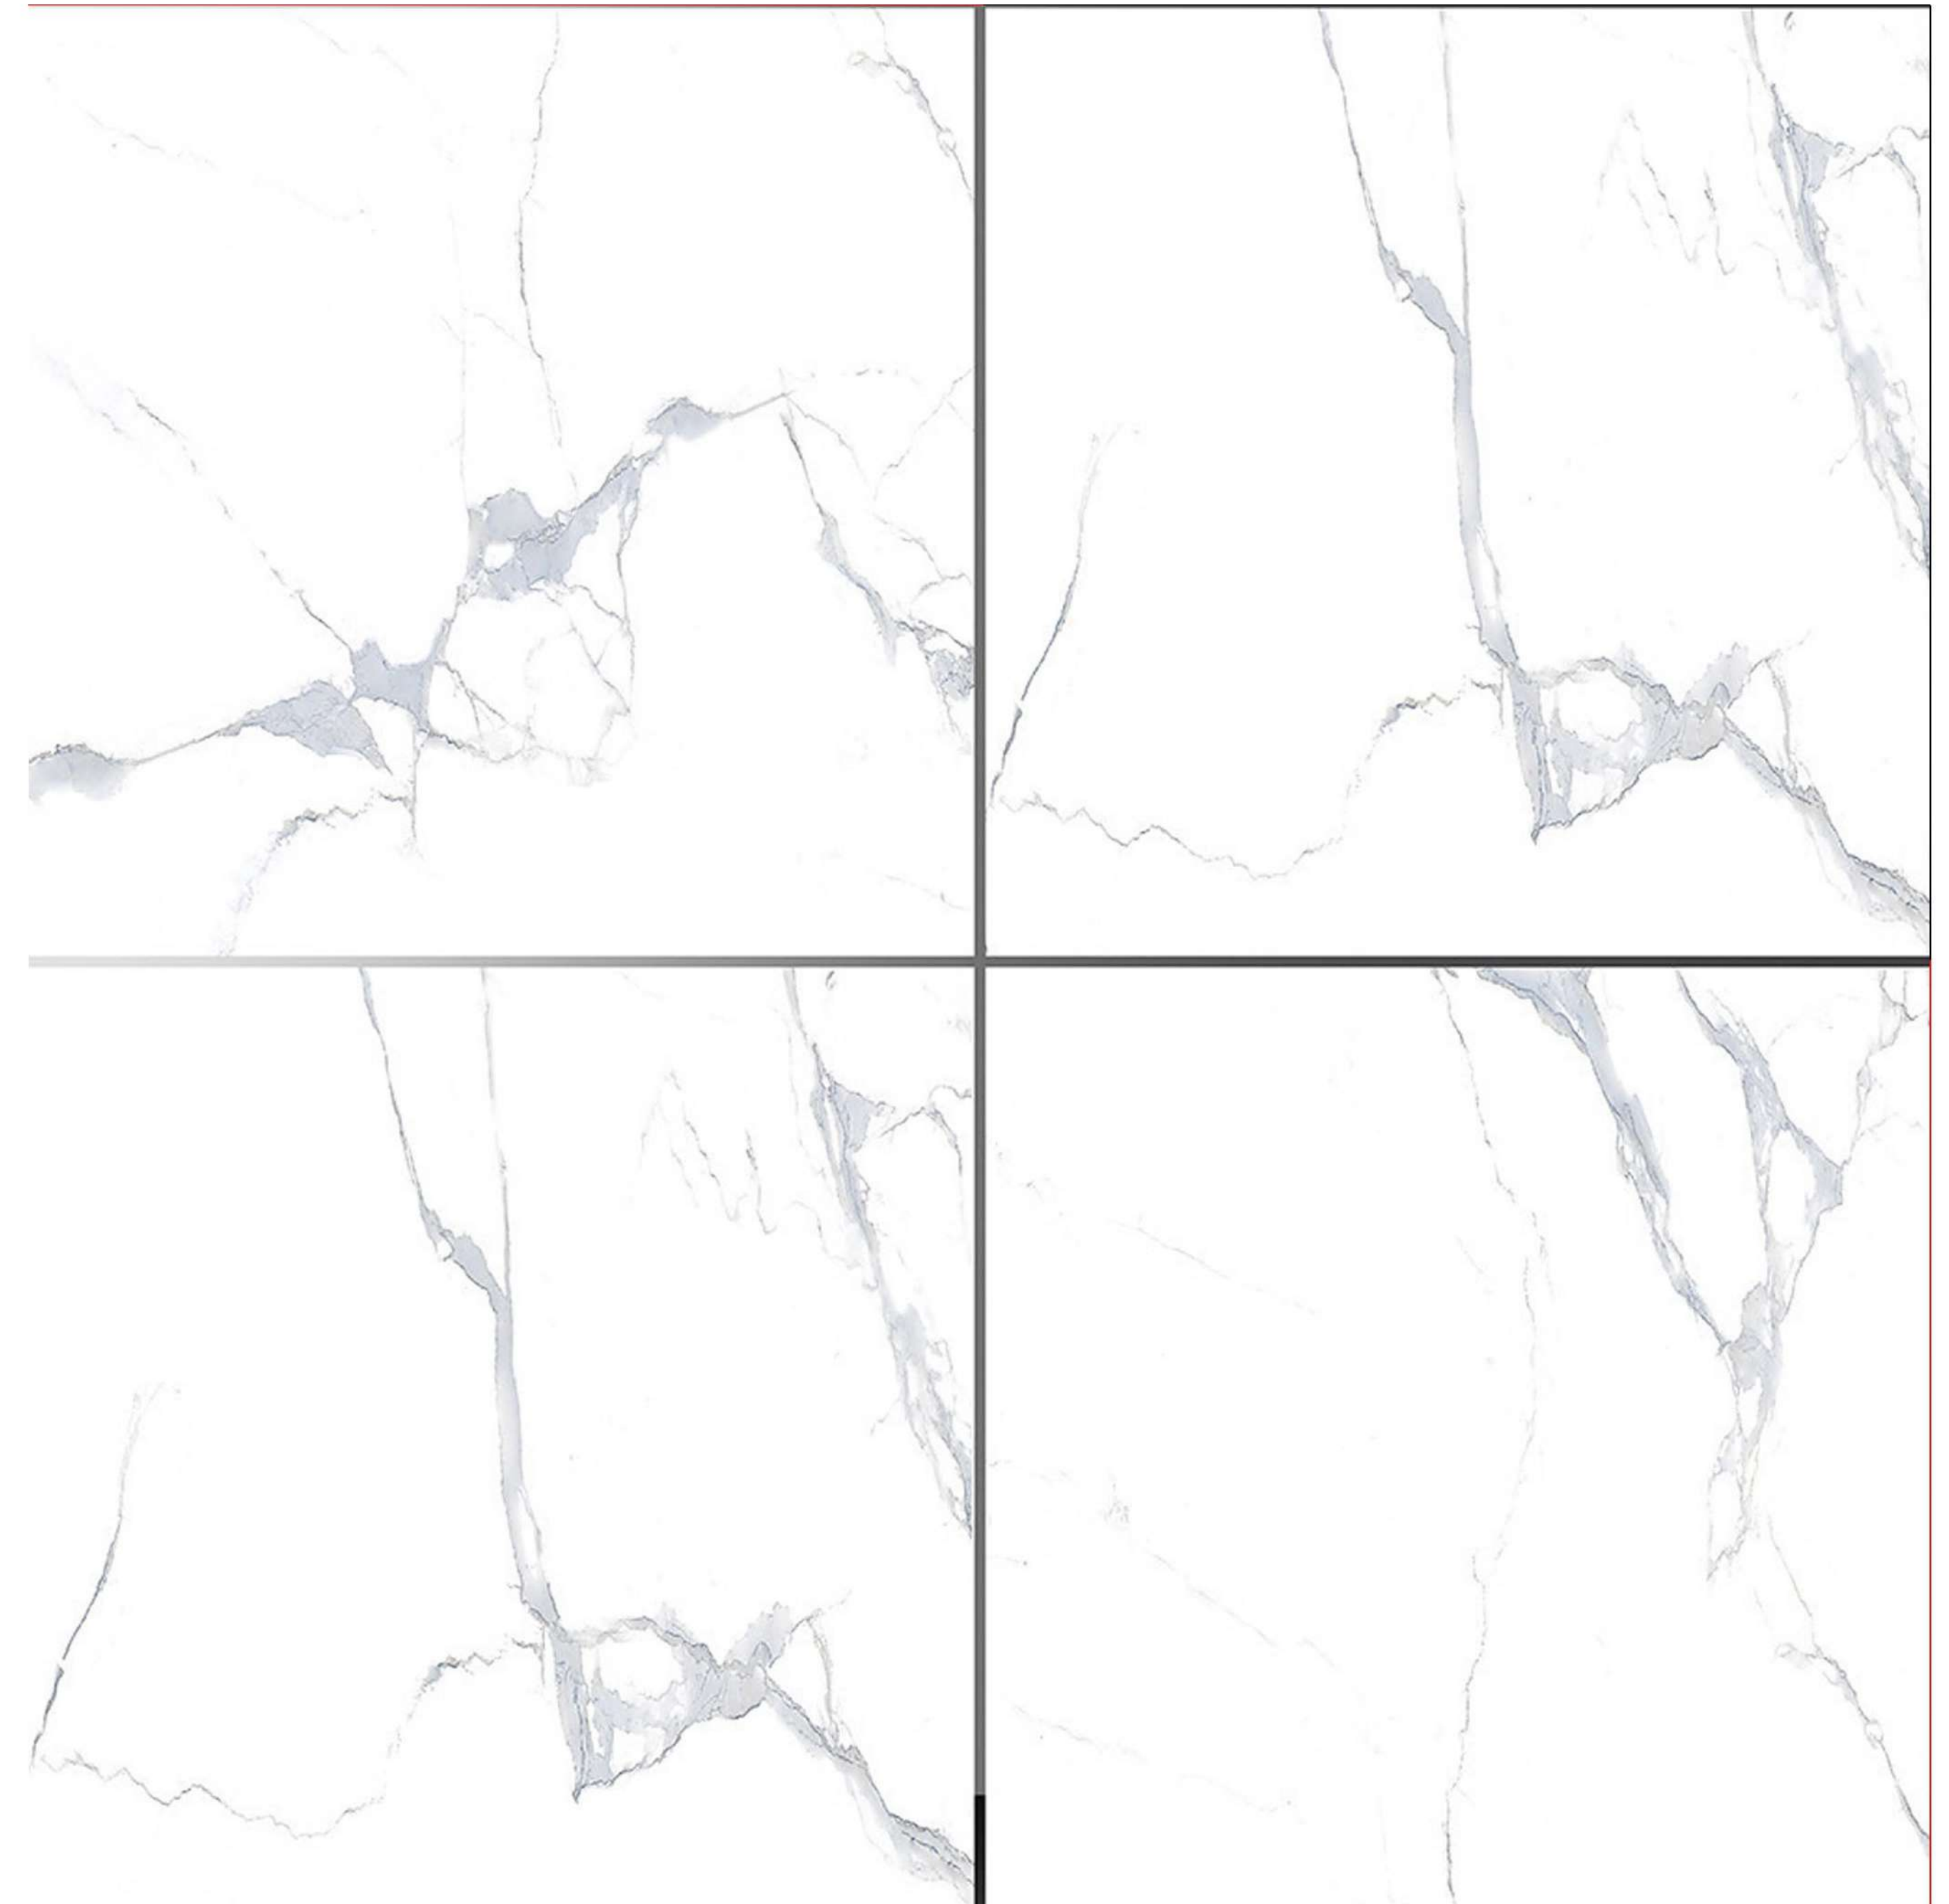



LEADSUN

**MATT
SERIES**

APPLICATIONS




WHITE BODY

**600MMx600MM
PORCELAIN TILES**



11037

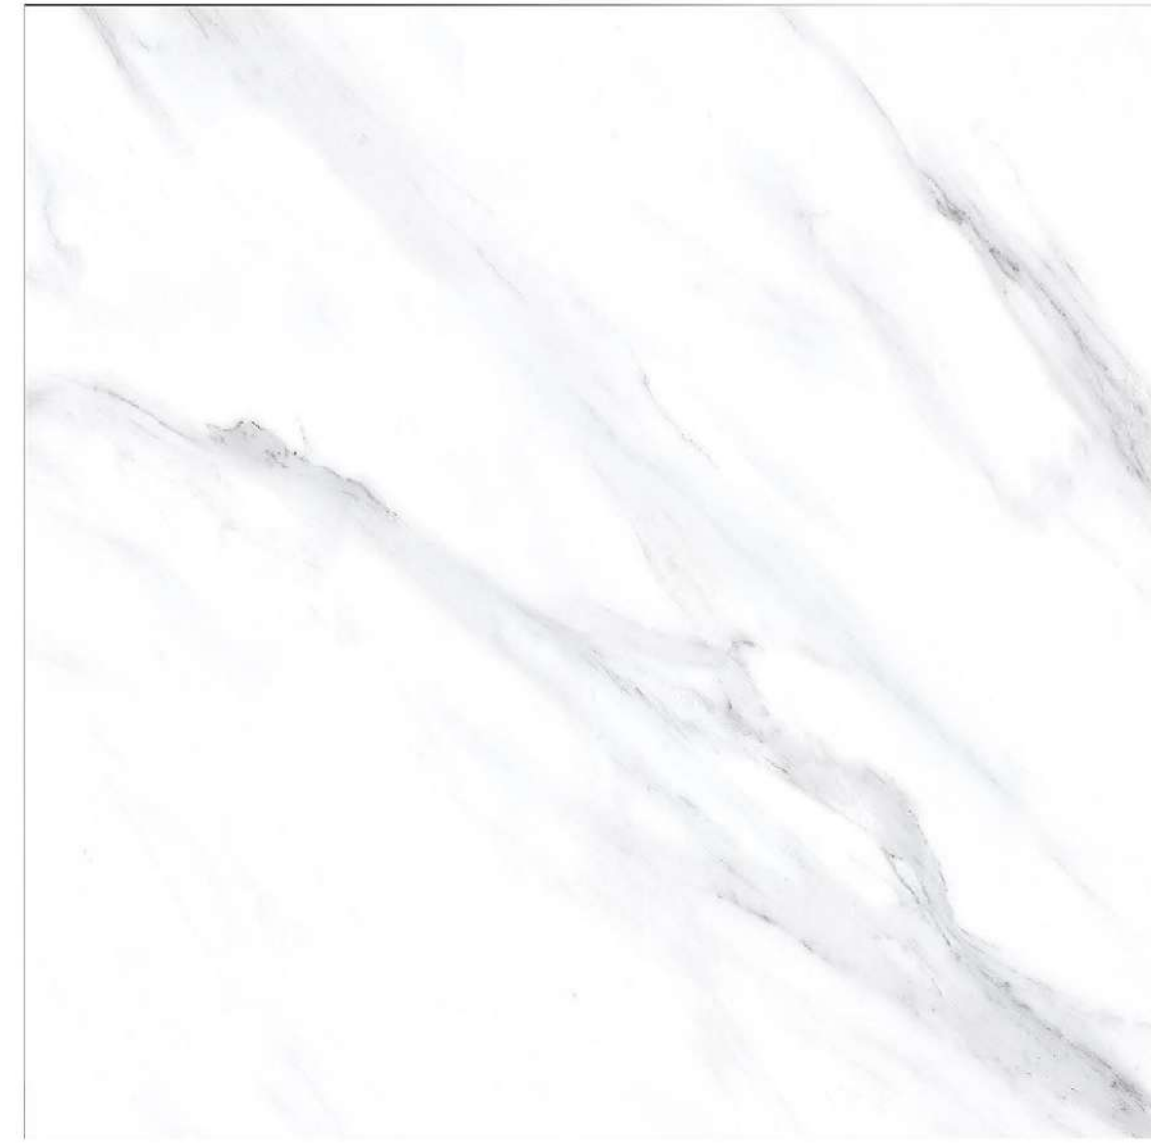


11038



11039



11040

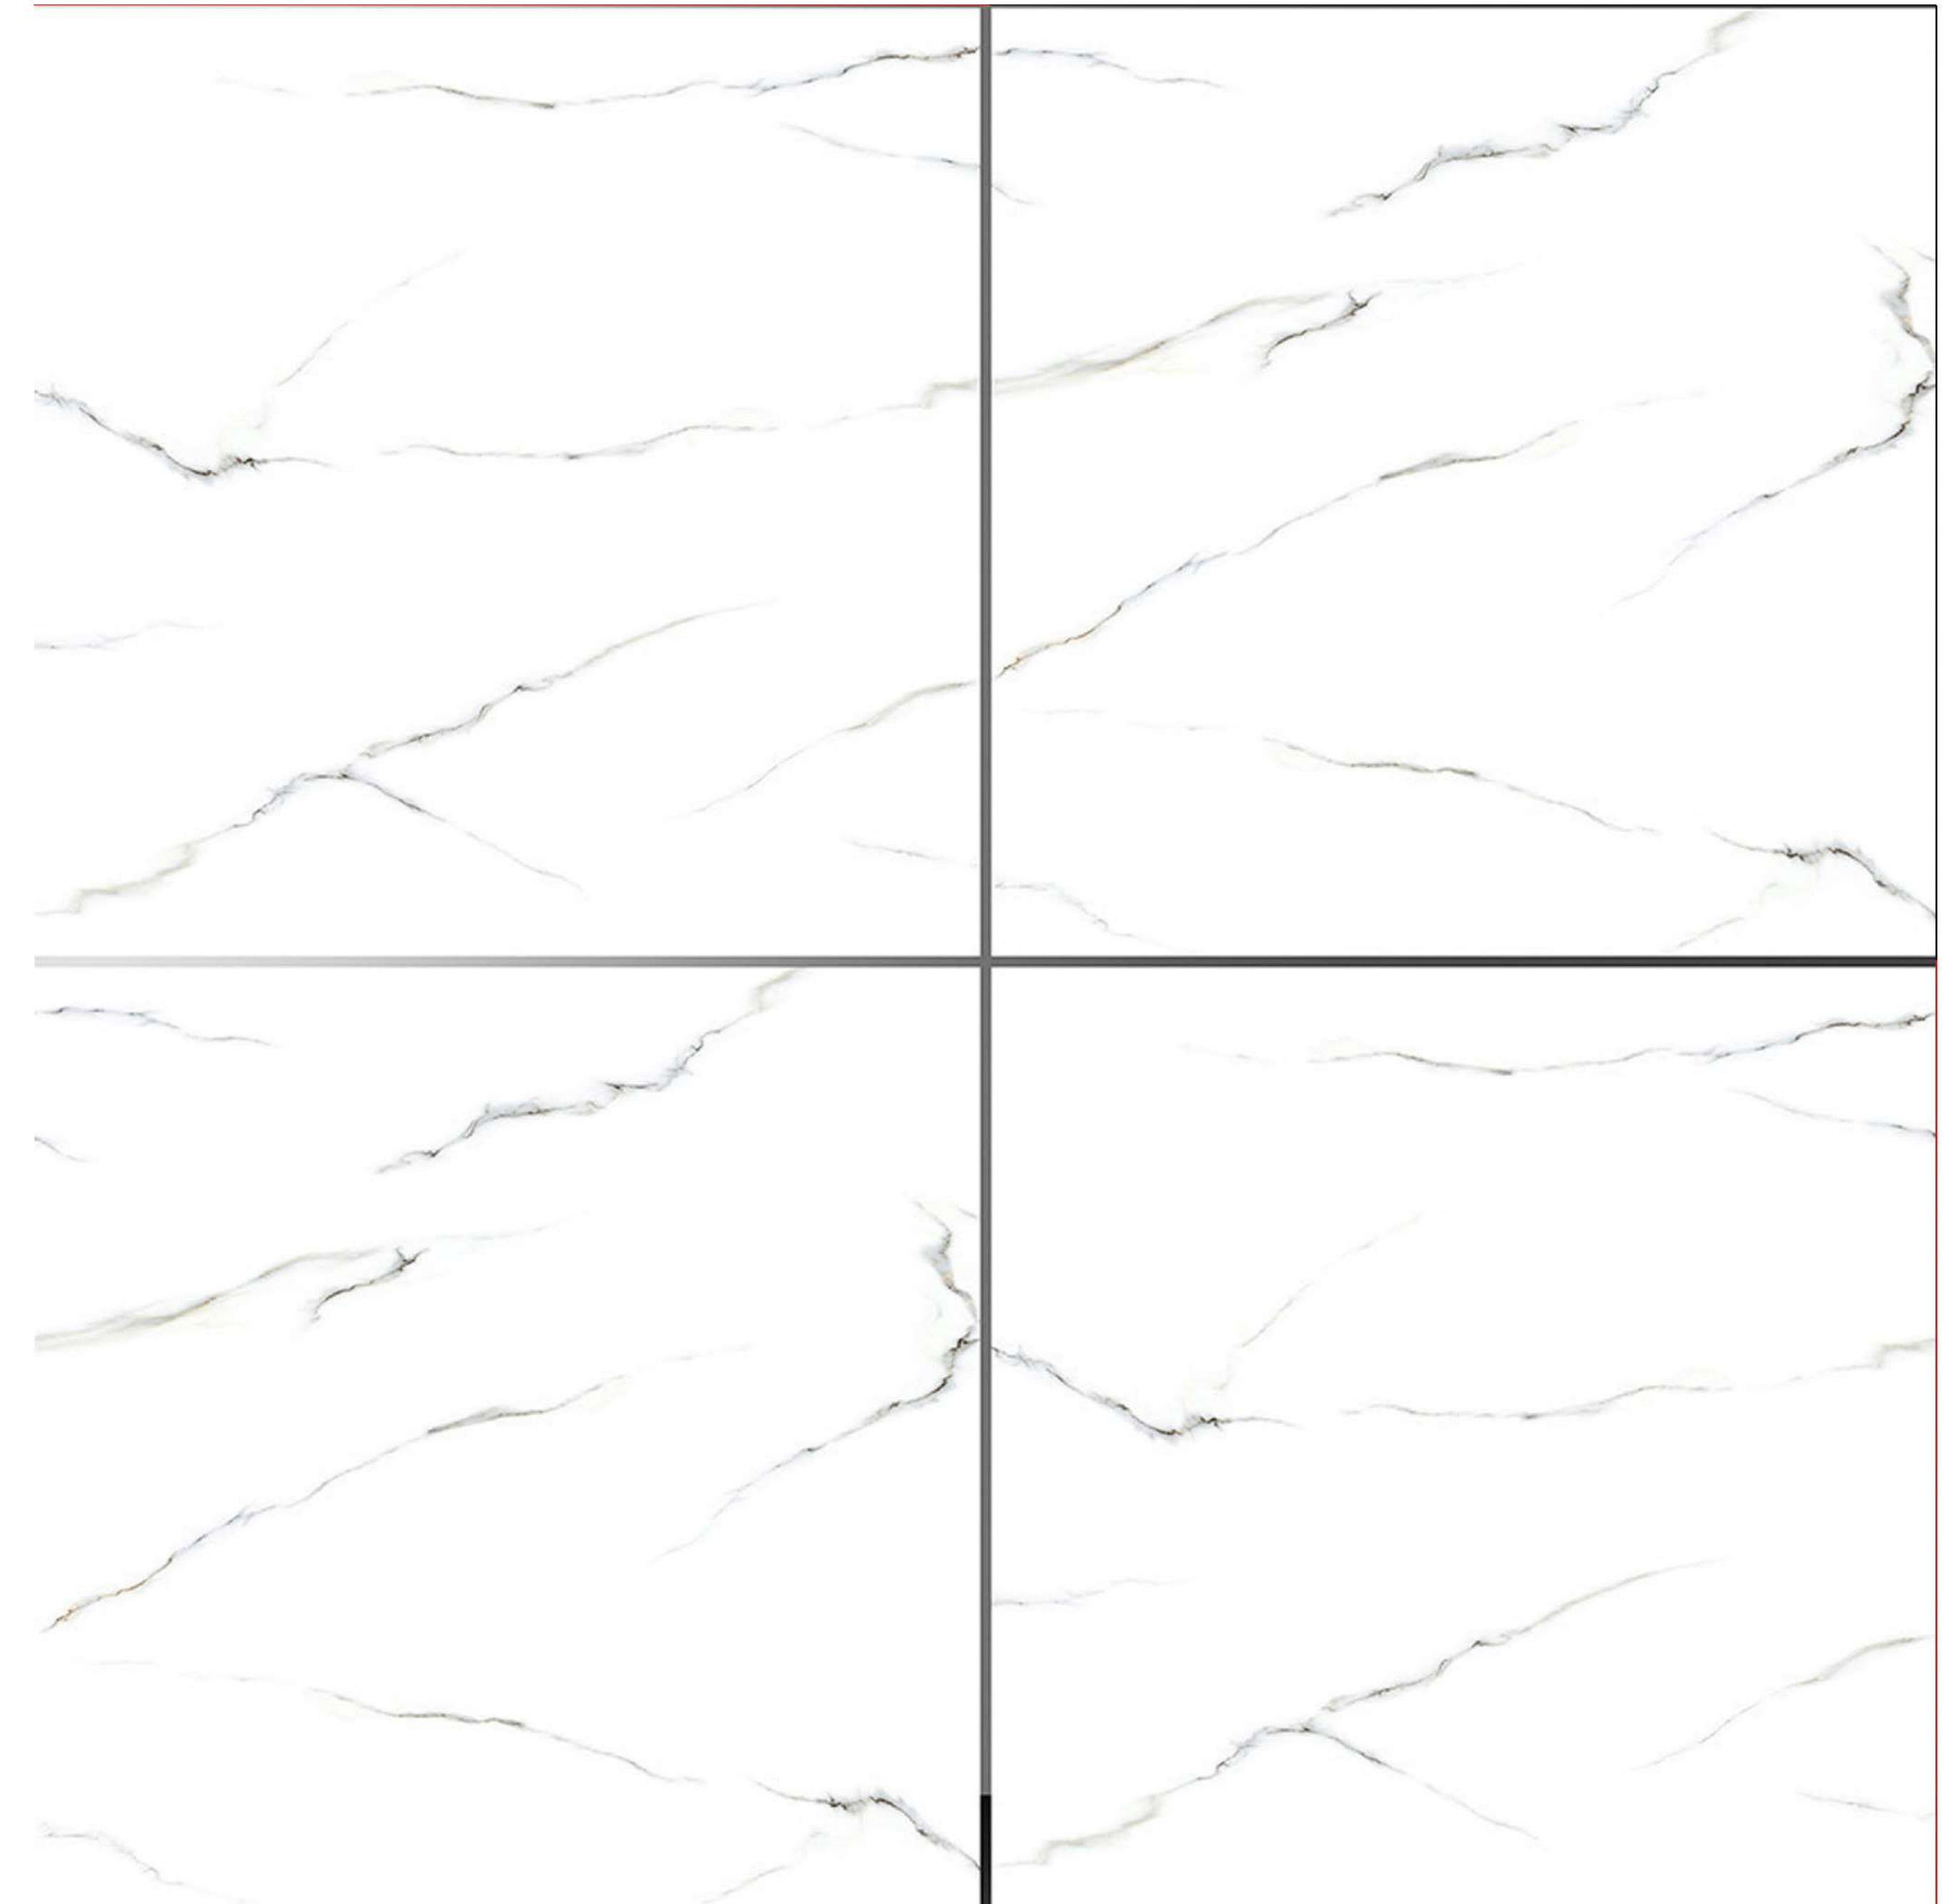



LEADSUN


**MATT
SERIES**

APPLICATIONS



WHITE BODY

**600MMx600MM
PORCELAIN TILES**

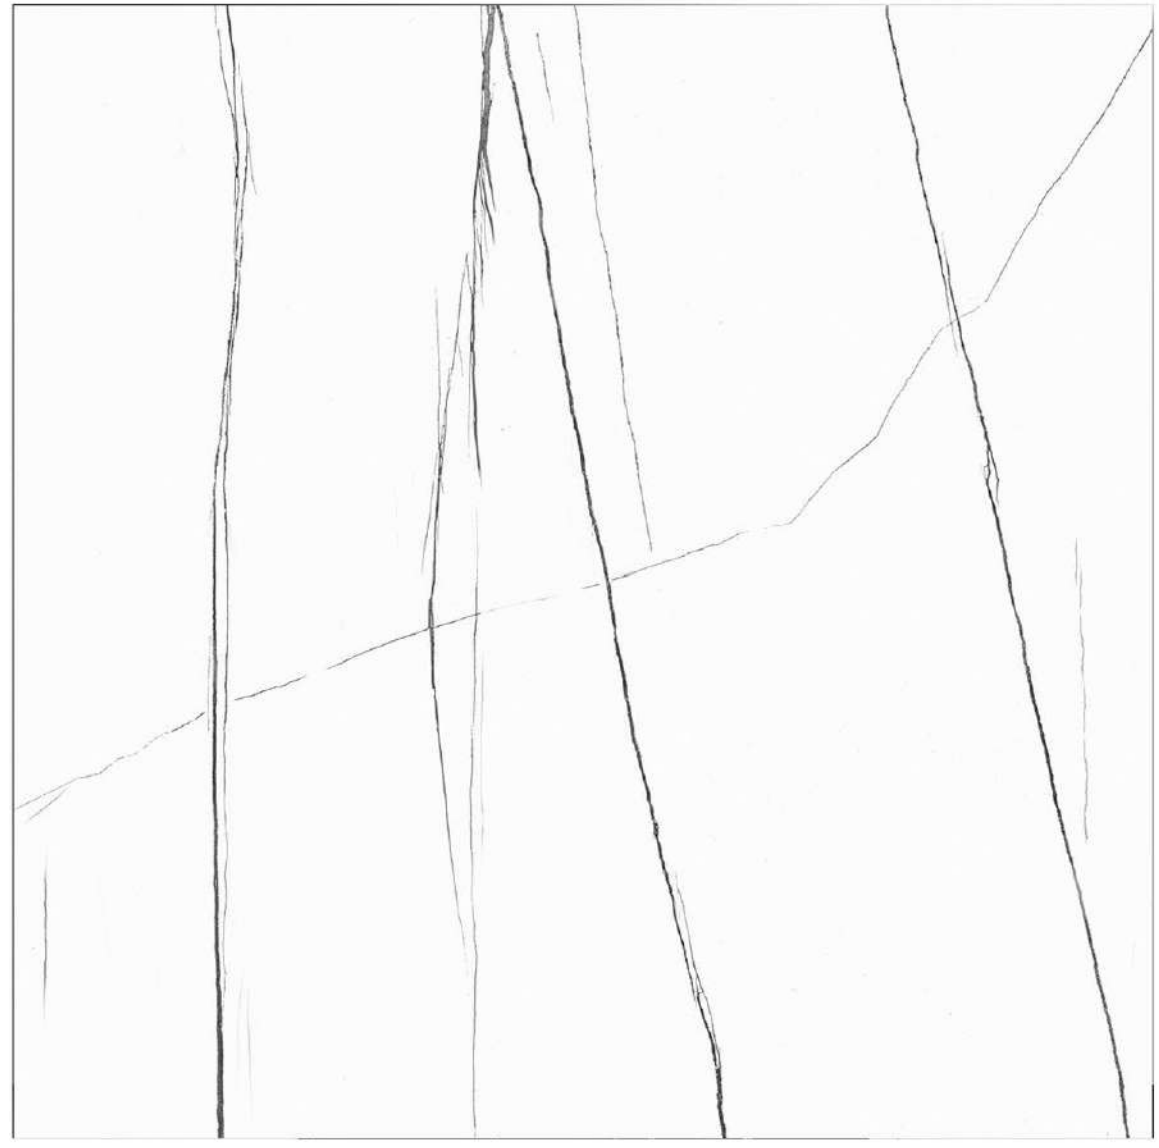

11041





11042



11043



11044

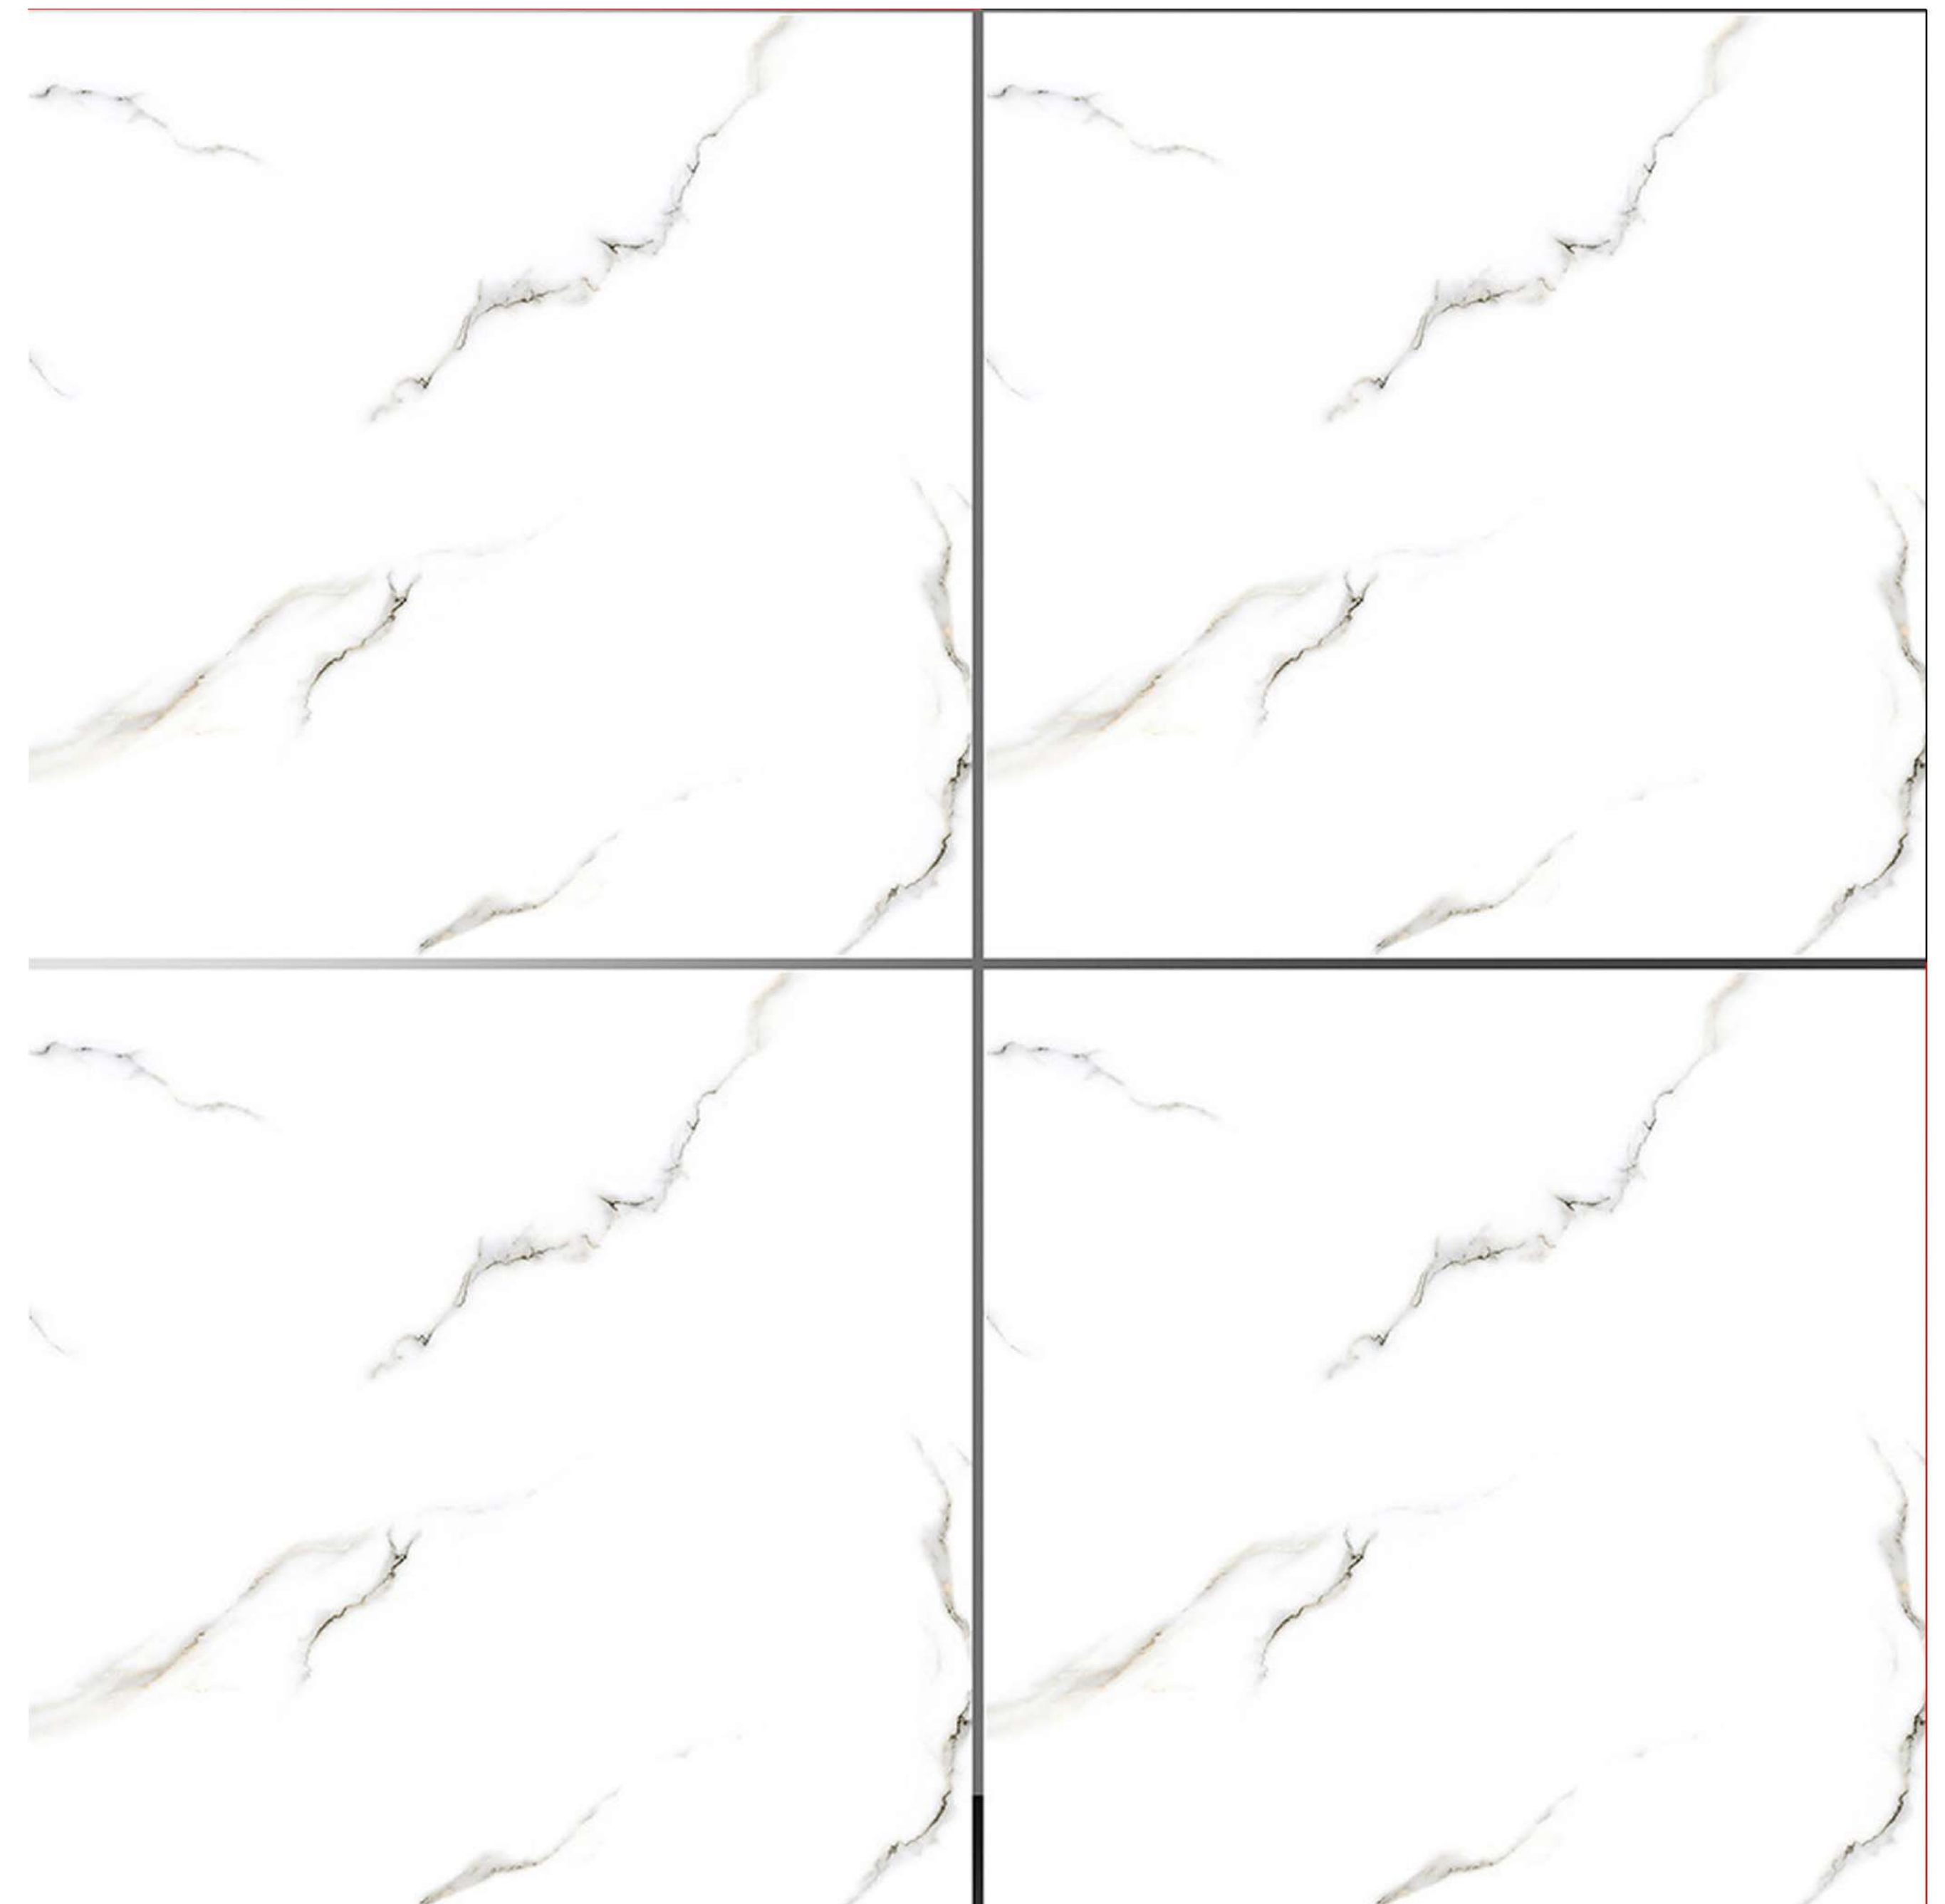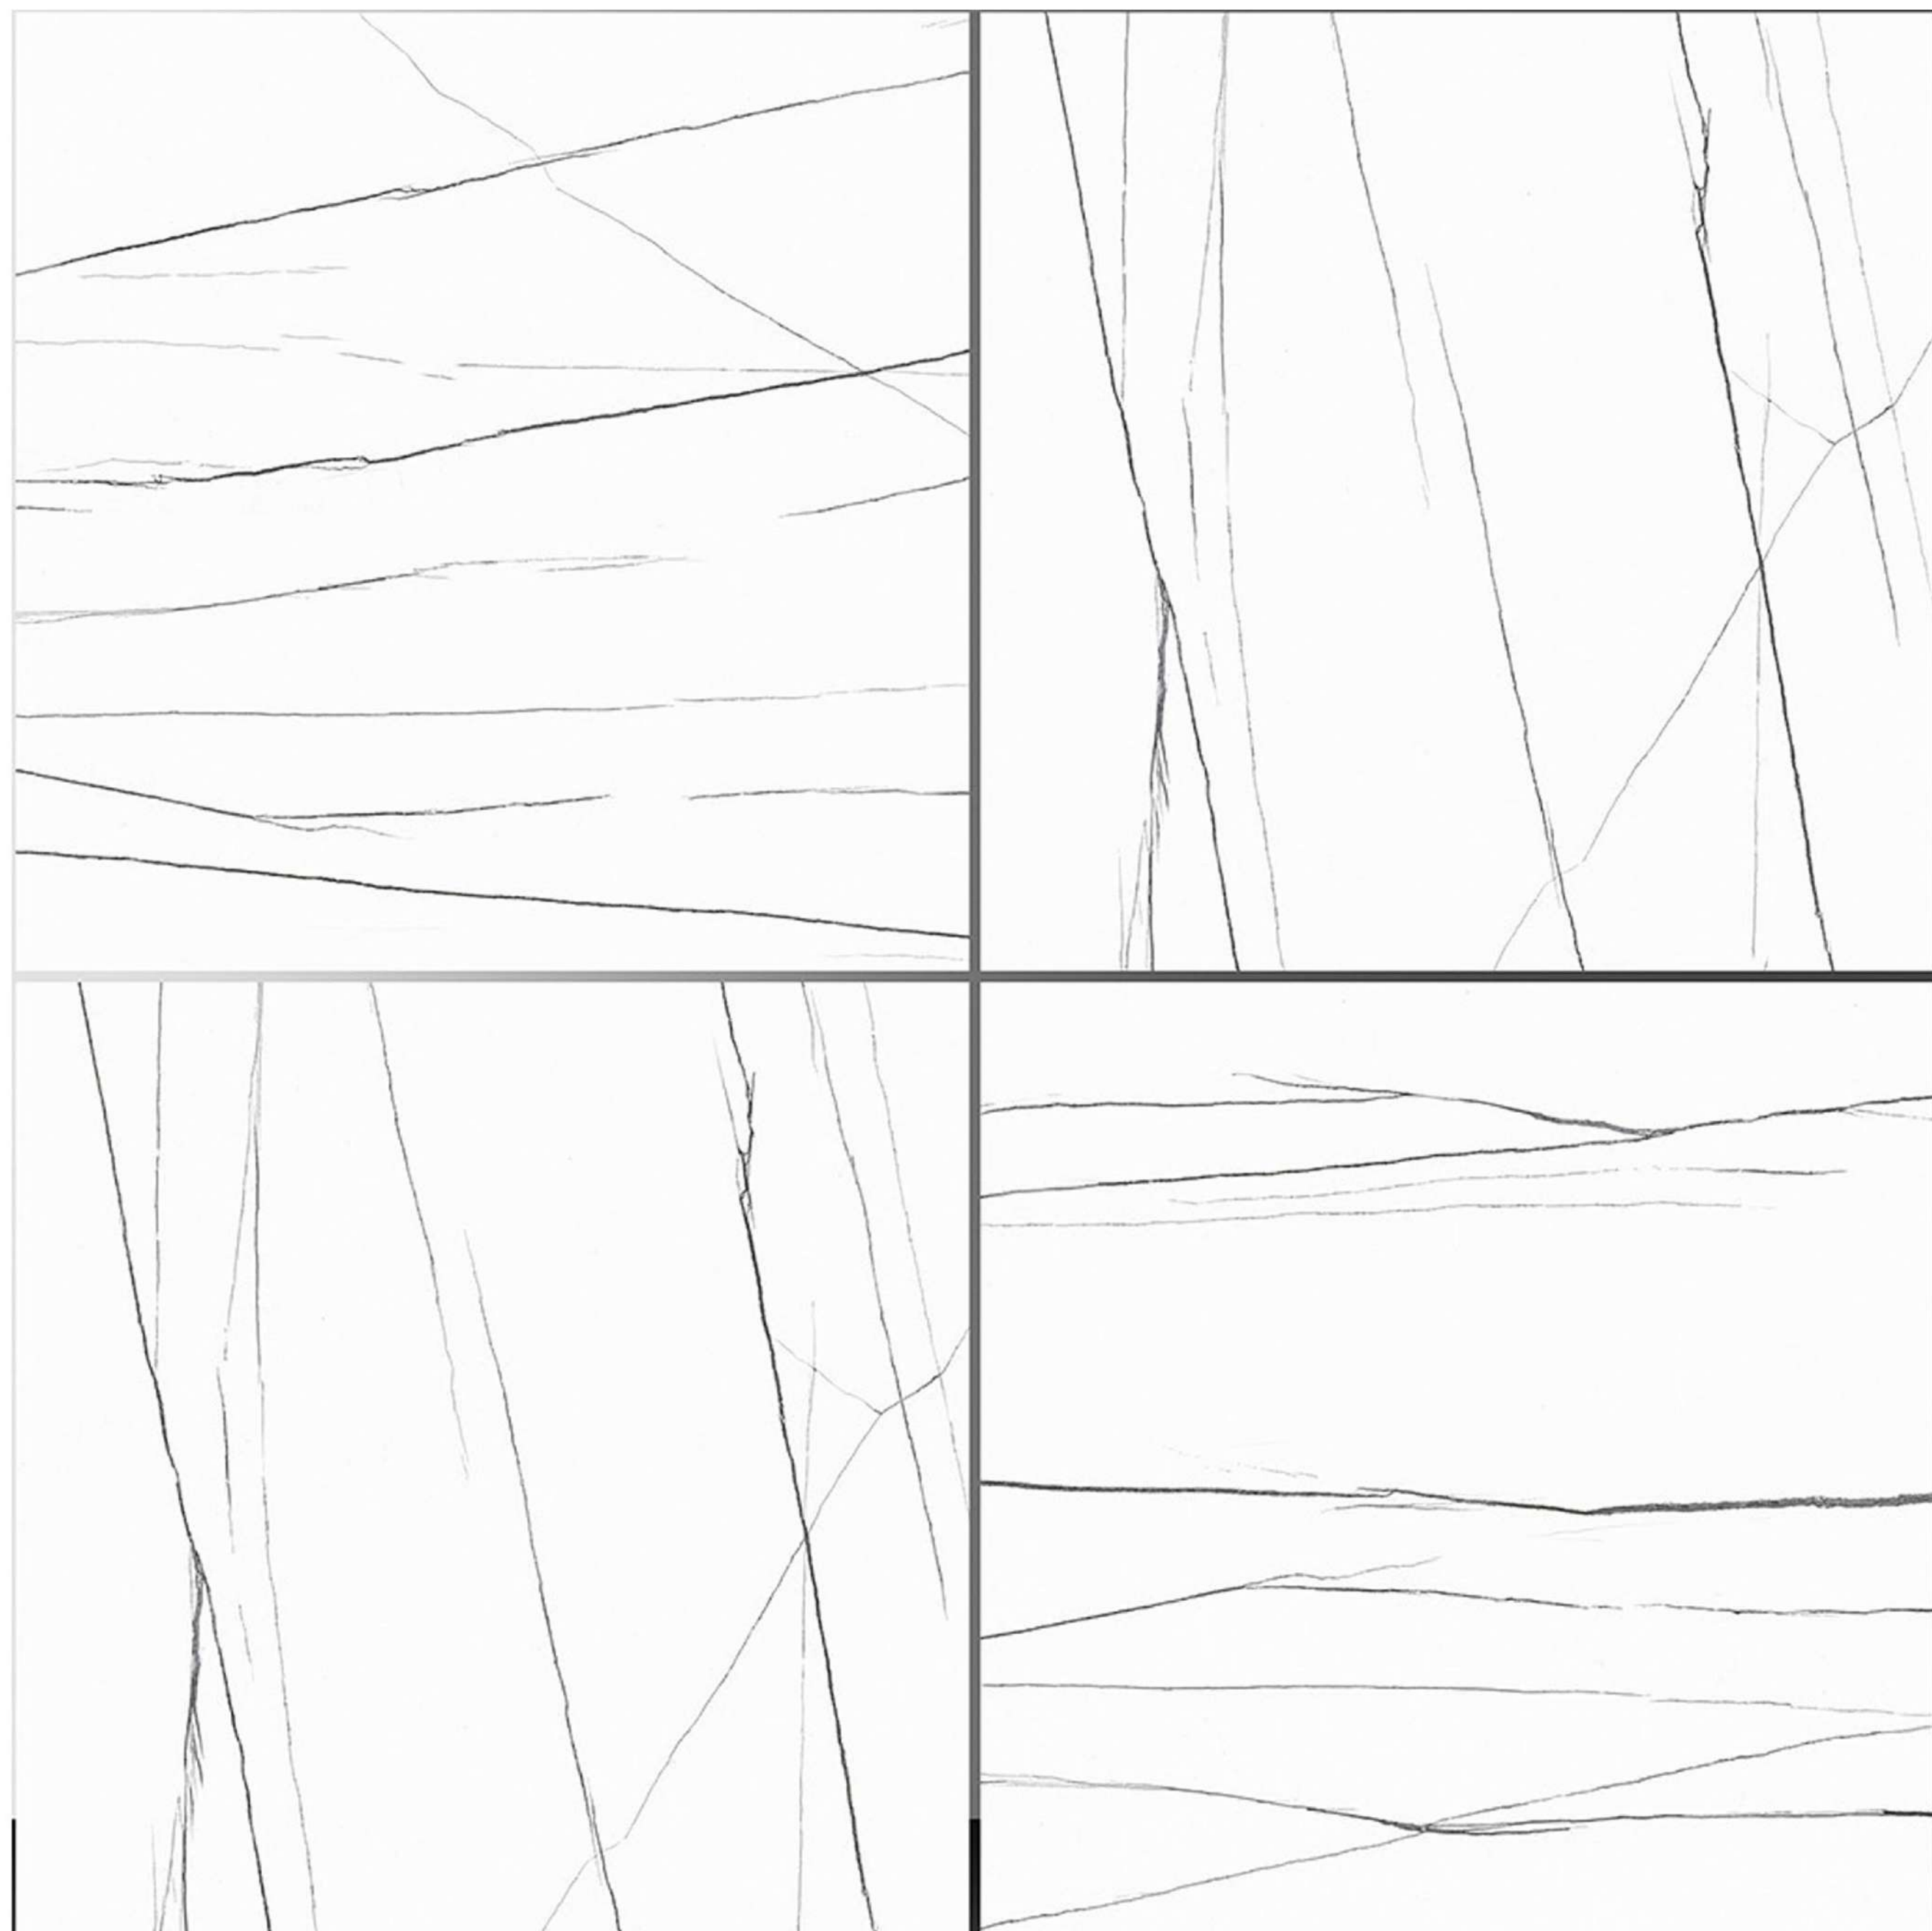



LEADSUN


**MATT
SERIES**

APPLICATIONS




WHITE BODY

**600MMx600MM
PORCELAIN TILES**

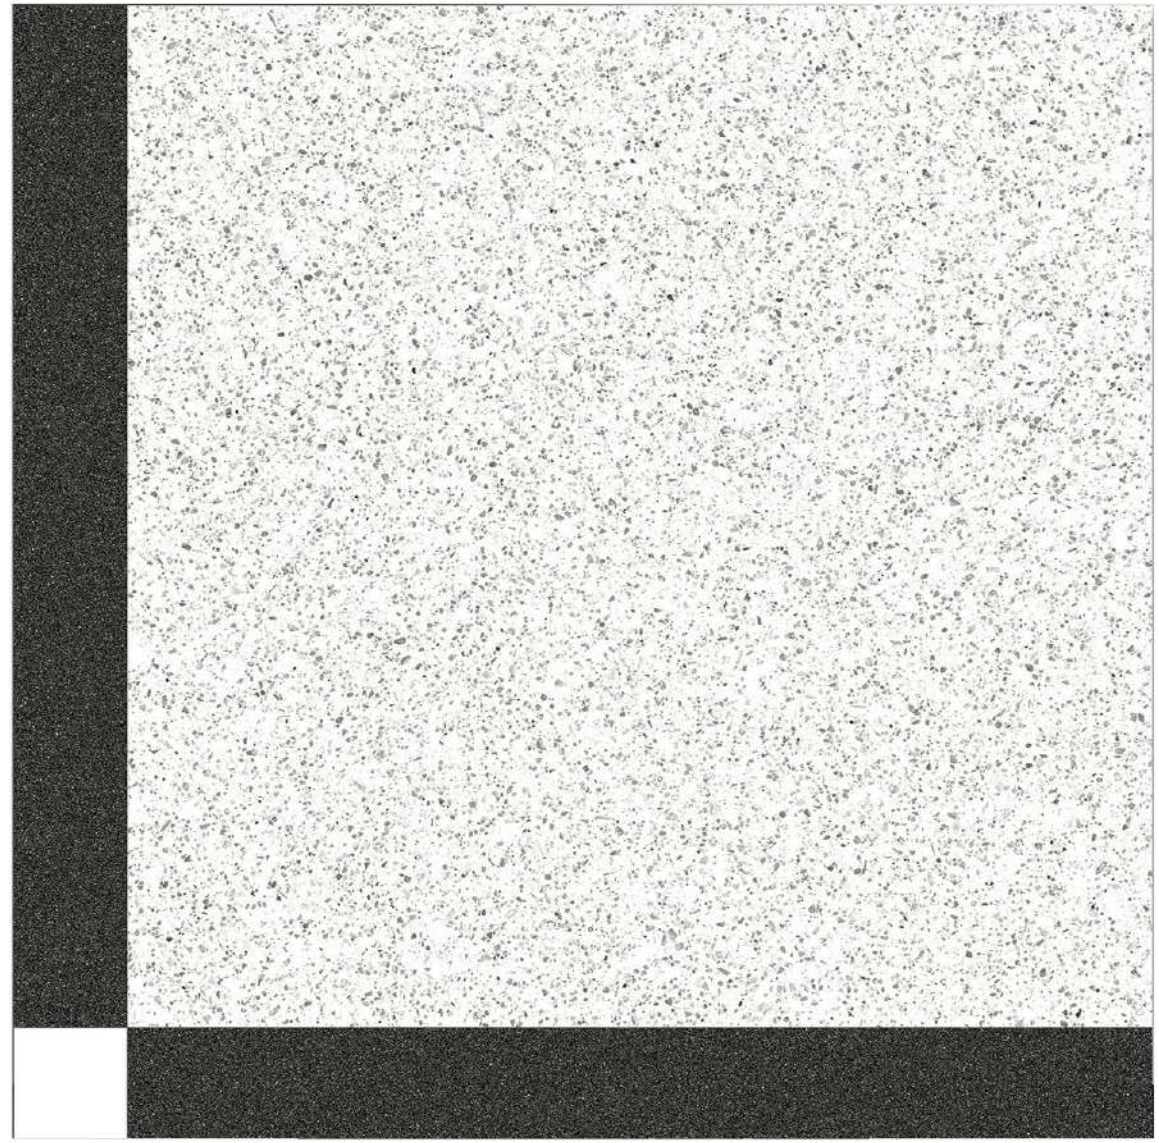

11045

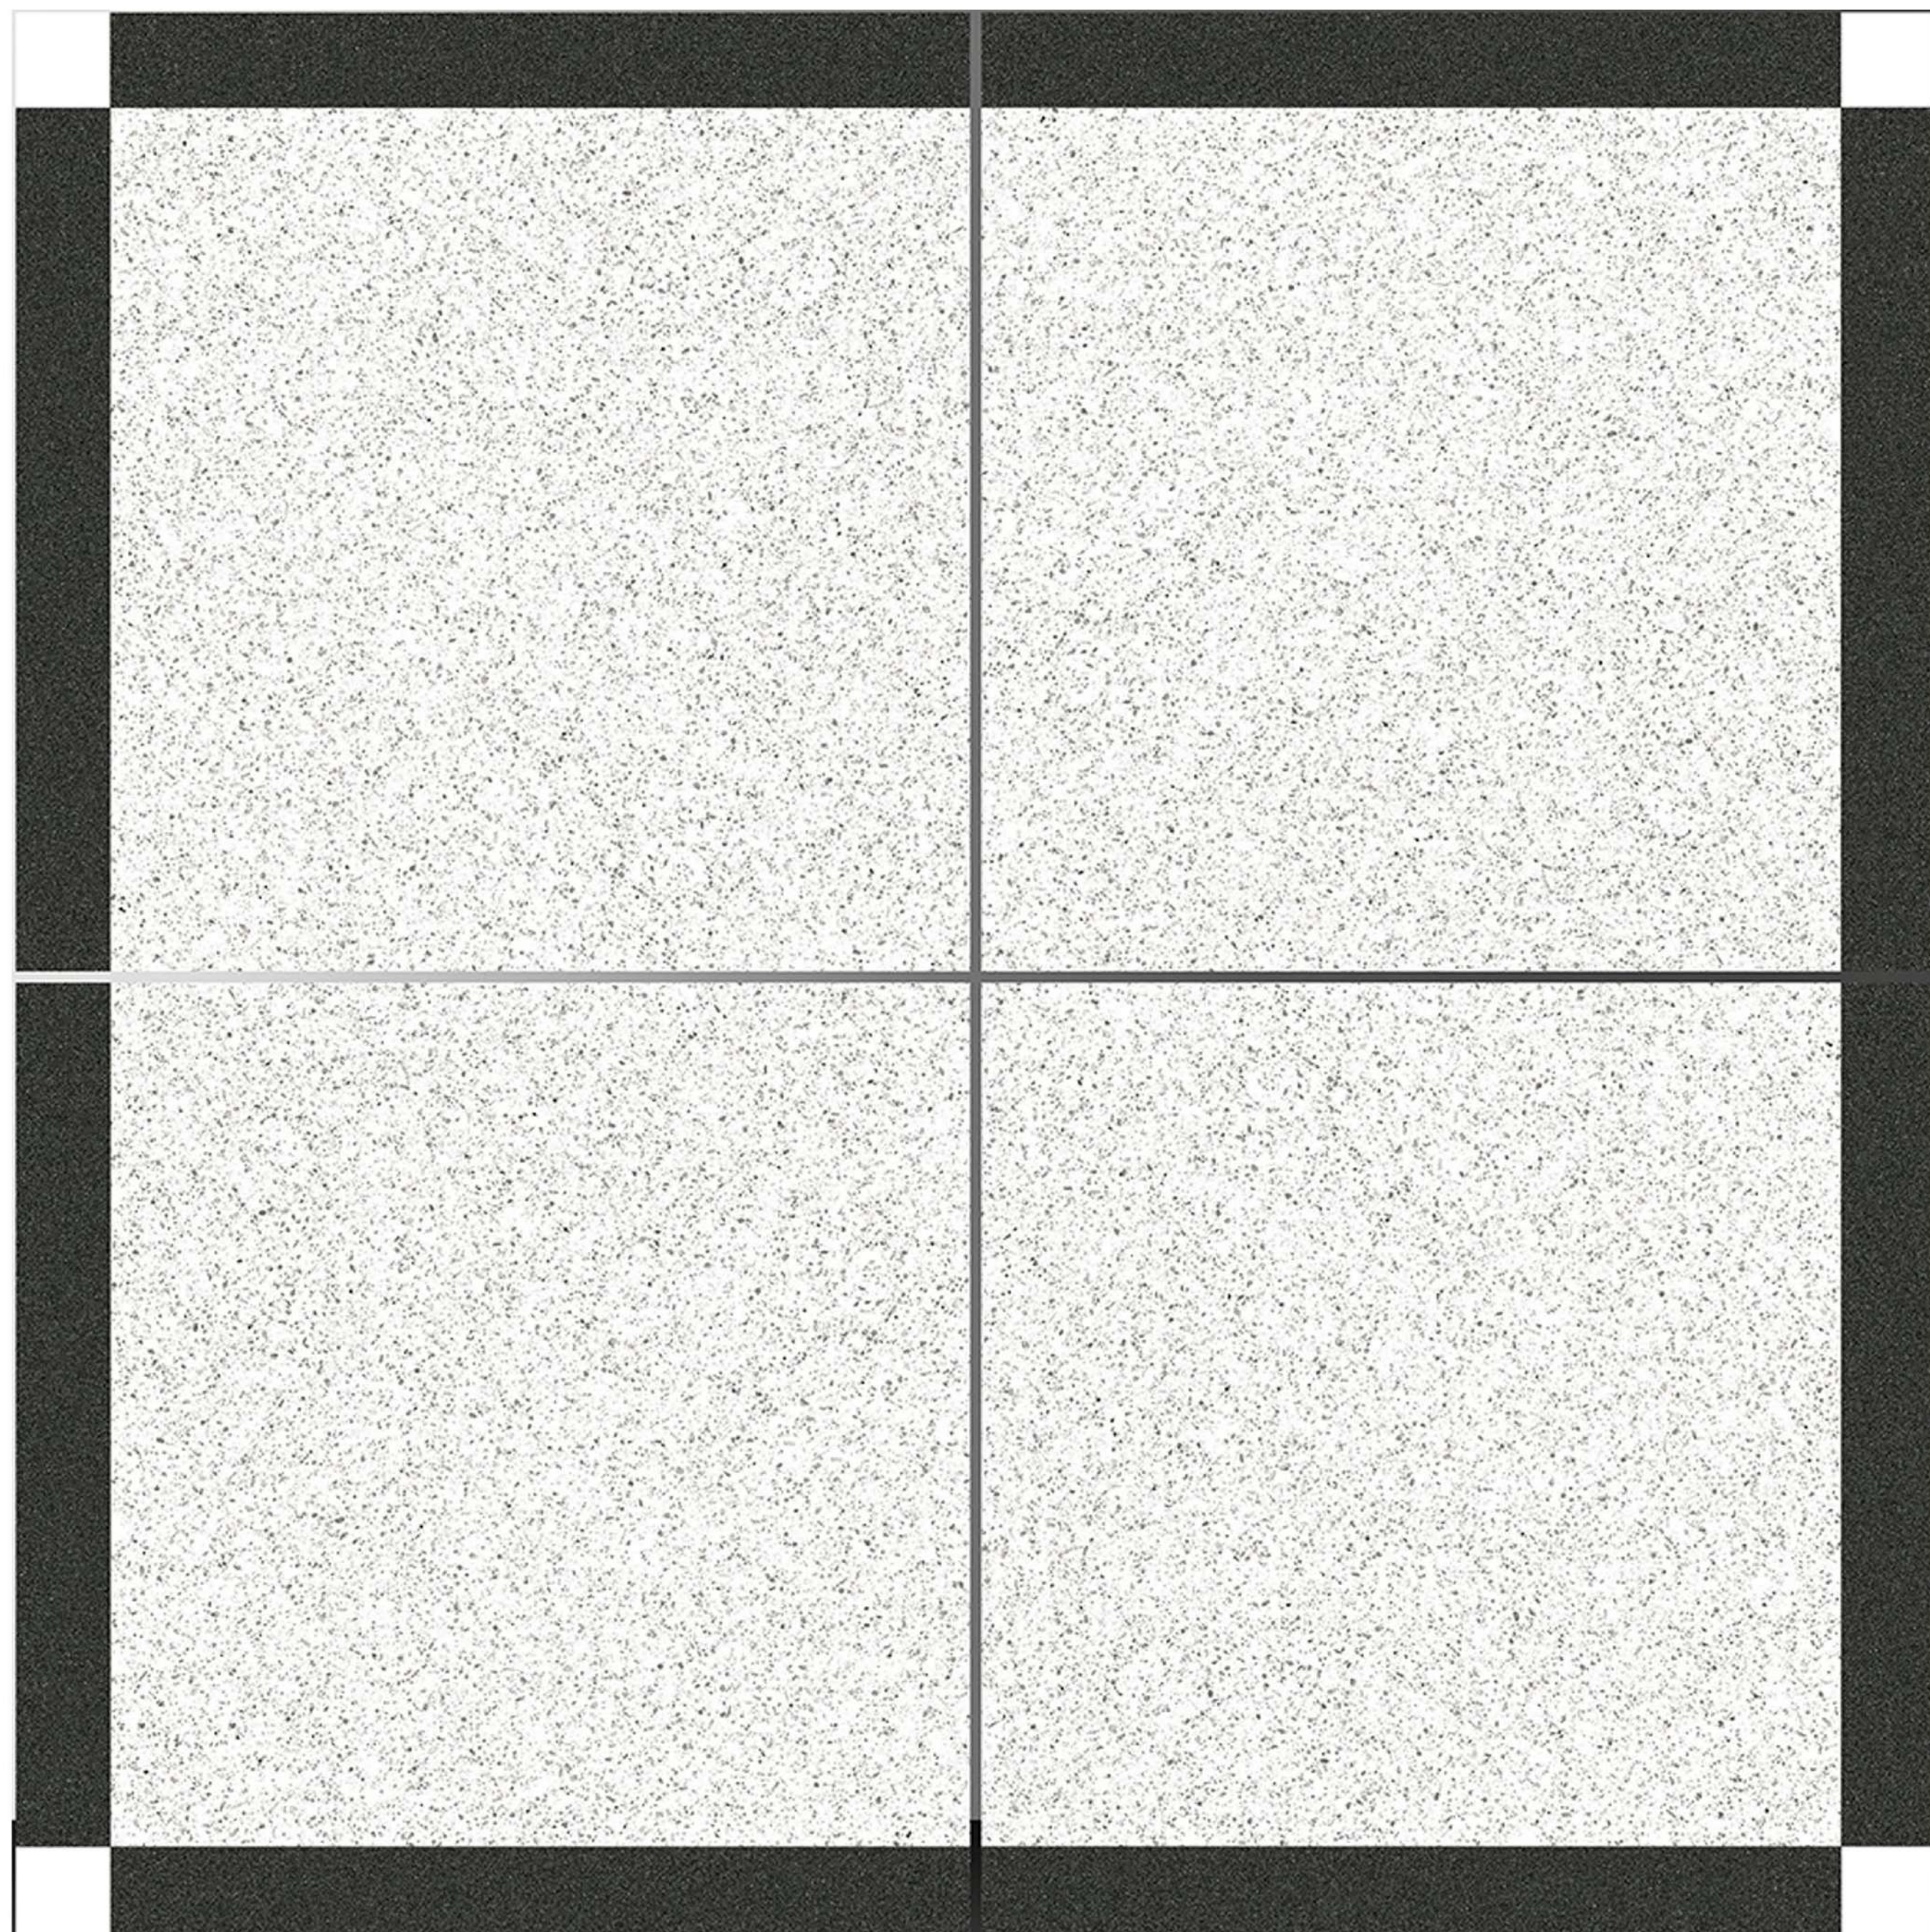

TECHNICAL SPECIFICATION

Particulars	Standard as per ISO 13006/EN 176	OUR VALUE	METHOD OF TESTING
Deviation in length	± 0.50%	± 0.3%	EN 98
Deviation in Thickness	± 5%	± 3%	EN 98
Straightness Of Sides	± 0.5%	± 0.3%	EN 98
Rectangularity	± 0.6%	± 0.3%	EN 98
Surface Flatness	± 0.5%	± 0.3%	EN 98
Water Absorption	< 3	3 < 4	ISO 10945.3 EN 98
Mohs Hardness	> 5	> 5	EN 101
Flexural Strength	> 35 N/Sq.mm	> 39 N/Sq.mm	—
Abrasion Resistance	As specified by Manufacturer	PE 3	ISO 10545.6 EN 102
Frost Resistance	Frost Proof	Frost Proof	ISO 10534 - 11
Chemical Resistance	No Damage	No Damage	ISO 10534 - 18
Thermal Shock Resistance	No Damage	No Damage	ISO 10545 - 9
Colour Resistance	No Damage	No Damage	—
Stain Resistance	Resistance	Stain Proof	ISO 10545 - 14
Moisture Expansion	NIII	NIII	ISO 10545 - 10
Crazing Resistance	Min 2 Cycle	Min 4 Cycle	—

Note : Colour Shown are as accurate as the limitations of the printing process will allow. Prospective Customer Are advised to inspect a sample of the tiles before ordering every effort has been made to ensure the Accuracy of the information given. However, the Company reserves the right to change the specifications without prior notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advice you to follow the fixing Instruction on the cartons of the tiles as on responsibility can be accepted by the company once the tiles have been fixed.

PACKING DETAIL

Size	Thickness	No. of Tiles	Area Approx.	Weight Approx.
600 X 600 MM	9 MM	4 Pcs.	1.44 Sq. Mtr.	25.5 Kg.

UTILITY OF FLOOR TILES





LEADSUN CERAMIC

Khokhara Bela Road, Survey No 506, Near Admin Vitrified Bela,
Morbi - 363 642, (Gujarat) INDIA.

E-mail

info@leadsunceramic.com | leadsunceramic@gmail.com

Web

www.leadsunceramic.com

Mobile No.

+91 97377 23222, +91 98253 14204